

## AN EXPERIMENTAL STUDY ON SINGLE BASIN SOLAR STILL AUGMENTED WITH EVACUATED TUBES

by

**Sampathkumar KARUPPUSAMY\***

Department of Mechanical Engineering, Tamil Nadu College of Engineering, Coimbatore,  
Tamil Nadu, India

Original scientific paper  
DOI: 102298/TSCI090806079S

*The productivity of the solar still is determined by the temperature of water in the basin and the glass temperature. Various active methods have been adopted to increase the temperature of the basin, so as to improve the productivity of solar still. Most of the previous research works have been focusing on flat plate collector and concentrating collector. In this experimental study, a single slope solar still directly augmented with evacuated tubes was used to increase the daily productivity by reducing heat losses. Evacuated tubes were directly coupled to the lower side of the single slope solar still with an area of  $1\text{m}^2$ . Black gravel is used to increase the productivity by means of reducing quantity of water in the basin. Extensive experiments were conducted to explore the performance of solar still in several modes namely still alone, still with black stones, still with evacuated tubes, and still with evacuated tubes and black gravel. The experimental set-up was designed and installed at Solar Energy Park, Tamilnadu College of Engineering, Coimbatore ( $77^\circ\text{E}$ ,  $11^\circ\text{N}$ ), Tamil Nadu, India. These experiments were conducted using tap water as feed. It was found that, after augmentation of the evacuated tubes, the daily production rate has increased by 49.7% and it increased by 59.48% with black stones. Economic analysis was also done and payback period of this experimental setup is 235 days.*

Key words: *augmentation, black gravel, evacuated tube, solar still*

### Introduction

Water is a precious natural gift and is being polluted by human activities, urbanization and industrialization. The ground water is often over exploited to meet the increasing demand of the people. Less than 1% of Earth's water is available for human consumption and more than 1.2 billion people still have no access to safe drinking water. Over 50% of the world population is estimated to be residing in urban areas, and almost 50% of mega cities having population over 10 million are heavily dependent on ground water, especially in the developing countries like India [1].

Most of the rural people still live in absolute poverty and often lack access to clean drinking water. Nearly half of the population is illiterate, not at all aware of the waterborne diseases affecting their health. Nearly 70% of the infectious diseases in India are waterborne. Indian villages are posed with problem of overexploitation of ground water due to increasing de-

\* Author's e-mail: ksktce@gmail.com

pendence on it as other fresh water resources are dwindling fast. Various desalination techniques are used to purify the water. Solar distillation is an easy and cost effective method to provide pure drinking water in rural areas without affecting the nature.

In general, solar distillation process is carried out both in passive and active modes. Normally passive solar still operates in low temperature and the daily productivity is comparatively low. Whereas, to increase the evaporation rate in an active mode the extra thermal energy is fed into the basin. To increase the productivity of solar still, the various active methods are being carried out by many researchers. Most of the works were based on the flat plate collector and concentrating collector. Rai *et al.* [2] have studied the single basin solar still coupled with flat plate collector and found that the daily production rate was increased by 24% when compared to the simple single basin solar still. Tiris *et al.* [3] found that the maximum yield of a simple solar still was 2.575 l/m<sup>2</sup> per day while it was 5.18 l/m<sup>2</sup> per day when integrated with flat plate collector. Badran *et al.* [4] found that its production rate was increased by 231% but efficiency has decreased by about 2.5%. The solar still productivity has increased by 36% while coupling flat plate collector and Badran *et al.* [5] found that the productivity was proportional to the solar radiation. Sanjay Kumar *et al.* [6] found that an active solar still with water flow over the glass cover has given maximum yield of 7.5 l per day. Singh *et al.* [7] concluded that the annual yield was at its maximum when the condensing glass cover inclination was equal to the latitude of the place. Voropouls *et al.* [8, 9] have studied solar stills coupled with solar collectors and storage tank both experimentally and theoretically and found that the productivity doubled for 24 hours period. Also, they have designed a hybrid solar desalination and water heating system [10].

Tiwari *et al.* [11] analysed the active regenerative solar still and also they analysed the high temperature distillation system [12]. Yadav *et al.* studied the transient solution for solar still integrated with a tubular solar collector [13], flat plate solar collector in thermosiphon mode [14] and significant rise in the distillate output was found when the still is coupled with the collector [15]. Sodha *et al.* [16] experimentally studied that yield of a solar still can be increased by utilization of waste hot water for distillation. Singh *et al.*, [17] analytically found that the efficiency of the system with a solar concentrator was higher than the one with a solar collector. Zeinab S. Abdel-Rehim *et al.*, [18] designed the modified solar still coupled in a solar parabolic through focal pipe and simple heat exchanger which resulted in 18% increase in productivity. Gracia Rodriguez *et al.*, [19] studied the distillation system coupled to a solar parabolic through collector and found that annual energy production was about 23% greater for a north-south collector. Integration of solar still in a multi source, multi use environment was studied by Mathioulakis *et al.* [20]. A relatively high temperature solar distillation with shallow solar pond was studied by El-Sebaei *et al.* [21]. Velmurugan *et al.* [22] found a considerable increase in productivity by coupling mini solar pond with solar still. Vimal Dimri *et al.* [23] studied the active solar still with different condensing cover material and found that yield was directly related to thermal conductivity of the condensing materials; copper gave a greater yield compared to glass and plastic.

Various types of evacuated tubes and their thermal analysis were described by Tiwari, [24]. Morrison *et al.* [25] concluded from the studies on water in glass evacuated tube water heater that, it is most successful due to its simplicity and low manufacturing cost and also evacuated tube solar collectors had better performance than flat plate solar collectors, in for high temperature operations. Indra Budiharadjo *et al.* [26] experimentally and numerically investigated the natural circulation flow rate through single ended water in glass evacuated tubes mounted over a diffuse reflector. Morrison *et al.* [27] found that circumferential heat distribution was an important parameter influencing the flow structure. Budihardjo *et al.* [28] conducted experi-

ments in water-in-glass evacuated tube solar water heater and found that a typical 30 tube evacuated tube array was found to be lower than a typical 2 panel flat plate array for domestic water heating. Louise Jivan Shah *et al.* [29] conducted test in all glass evacuated tubular collector and the results showed that, the collector with the shortest tube length yielded the highest efficiency and the optimal inlet flow rate was around 0.4-1.0 kg per minute.

Solar thermal collectors can potentially gain energy through conduction, convection and radiation. Flat plate collector and the evacuated tube are gaining energy from radiation. However, the flat plate collector will lose energy through conduction. But in the case of evacuated tubes, there is virtually no energy loss from the vacuum. The cylindrical shapes of the evacuated tube enable them to positively track the sun throughout the day. Flat plate collector provides peak energy output only during the midday when the sun is perpendicular to the collector surface. The flat plate collectors are best for 10-50 °C temperature operations. Normally, the domestic water heater needs an average temperature of 60 °C. Evacuated tubes are best for an operating temperature of more than 50 °C [30]. To achieve a higher water temperature in the basin, evacuated tubes are augmented directly with the solar still. So far, no such attempts of experimental investigation are reported in the literature for the productivity enhancement in solar still.

The main objective of this work is to experimentally investigate the performance of the solar still augmented with evacuated tubes. To increase the productivity of the still, black gravels are used inside the basin so as to reduce the quantity of water. Even though the black gravels were used for the productivity enhancement by Nafey *et al.* [31] and here the same is used for the proposed system uses black gravels along with evacuated tubes for enhancing the productivity.

### Experimental set-up and instrumentation

The experimental setup was designed and installed at Solar Energy Park, Tamil Nadu College of Engineering, Coimbatore (77°E, 11°N), Tamil Nadu, India. The major elements of the experimental set-up are single basin solar still and evacuated tubes. The experimental set-up used for the study is shown in fig. 1. The still is made up of aluminum sheet of 100 cm × 100 cm areas and the same is also acting as a basin. The inner side of the aluminum plate acts as absorber plate and it is painted with black colour for a height of 10 cm at the bottom to absorb higher incident solar radiation. Remaining area in the aluminum plate acts as reflector so as to increase the effect of radiation in the solar still. Another box type outer structure of area 105 cm × 105 cm was designed and fabricated to hold the still. An insulation of 4 cm thickness is provided at the bottom and sides to reduce the heat losses. Polyurethane foam (PUF) with the thermal conductivity of 0.024 W/m<sup>2</sup>K is used for this purpose. The water in the basin is condensed by using an ordinary window glass of thickness of 0.4 cm and it is fixed at an angle of 11° with respect to horizontal axis (latitude of Coimbatore). The purified water condensed from the glass is collected by folding aluminum sheet in the lower side of the still in “U” shape. Fur-

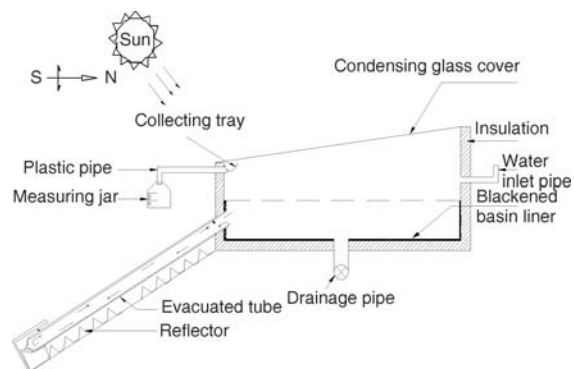


Figure 1. Schematic of the experimental set-up

ther the “U” shaped collection tray is connected with rubber pipe to collect the purified in a measuring jar. A silicon rubber sealant is used to hold the glass intact with the still surface and to prevent the vapour leakages from the still. Holes are made in the upper side of the still for the inlet pipe and bottom side for the outlet pipe. The thermocouples inside the still are fixed by providing two other small holes in sides of the still.

The second major part of the experimental setup is the evacuated tubes. Arrangement of evacuated tube in solar still is shown in fig. 2. Eight evacuated tubes are coupled by making 6 cm diameter hole in the lower side of the still. The evacuated tubes are placed on a metal frame and it is connected to the still stand at an angle of  $45^\circ$  with respect to the horizontal axis. Two reflector plates made up of aluminum in corrugated structure are used to increase the reflective radiation falling on evacuated tubes and it is fixed above the metal frame. Water in glass type evacuated tubes with a length of 15 cm, outer diameter of 5.8 cm, inner glass diameter of 4.7 cm, and glass thickness of 0.16 cm are used for this study. Rubber gaskets are used to fix the evacuated tubes to the inner side of the basin. The angle of the evacuate tubes is maintained at  $45^\circ$  with

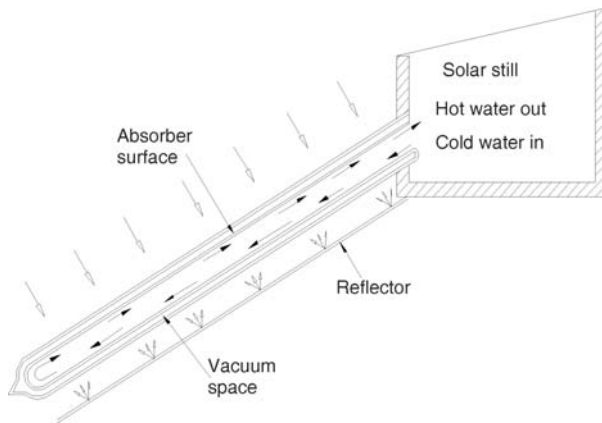


Figure 2. Arrangement of evacuated tube in solar still



Figure 3. Pictorial view of solar still augmented with evacuated tubes

respect to the horizontal surface so as to receive the maximum solar radiation. The bottom end of the evacuated tube is well supported with sponge materials in a separate metal structure of the frame. The vapour leakage from the still is prevented using silicon sealant. The selective surface absorber in the inner glass receives the solar radiation and it transfers it as heat energy to the water in the tube. The vacuum space in-between the two glasses reduces the heat losses. The water circulation flows naturally through the single ended tubes. Water in the evacuated tubes is heated by the solar radiation and the hot water rises to the still basin due to the density difference. The high temperature water entering the still basin gets mixed up with the low temperature water in the basin. This makes the low temperature water to flow back to the evacuated tubes and this process continues. The pictorial view of the solar still augmented with evacuated tubes is shown in fig. 3.

The wind speed is measured using digital wind anemometer with the range of 0-15 m/s and accuracy of  $\pm 0.2$  m/s. During the experimental investigation, the wind speed was in the range of 1-5 m/s. The temperature at

various locations in the still was measured by “J” type thermocouples with the range of 0-700 °C and accuracy of  $\pm 1$  °C. The intensity of solar radiation is measured using solarimeter with the range of 0-1200 W/m<sup>2</sup> and accuracy of  $\pm 5$  W/m<sup>2</sup>. The solarimeter used for the study is manufactured by Central Electronics Limited (CEL), New Delhi, India. A plastic measuring jar of 1000 ml capacity with accuracy of  $\pm 5$  ml is used for the collection of desalinated water.

### Experimental procedure

The incident solar radiation is transmitted through an angled glass cover to the water in the basin. Thus the basin water gets heated up and evaporates. The evaporated water particles condense in the inside layer of the glass cover. This condensed water flows down the cover due to the slope provided and reaches the channels, where it is collected by the collection jar. At the beginning of the experiment, tap water is filled in the basin up to 5 cm height through the inlet pipe. The experiment is commenced after 24 hours of assembling the glass cover, so as to enable the setup to reach the steady-state condition. For each experiment, the glass cover is cleaned in the morning to avoid the dust deposition over the outer layer of the glass. The extensive experiments were conducted on clear sunny days from May 2008 to March 2009. The readings were taken from 9 AM in the morning till 5 PM in the evening at hourly intervals. The variables measured in this experiment are water temperature,  $T_w$ , basin temperature  $T_b$ , vapour temperature,  $T_v$ , inner glass temperature,  $T_{gi}$ , outer glass temperature,  $T_{go}$ , evacuated tube inlet temperature,  $T_{ei}$ , evacuated tube outlet temperature,  $T_{eo}$ , ambient temperature,  $T_a$ , solar radiation on still,  $I(t)_s$ , solar radiation on evacuated tube,  $I(t)_e$ , wind speed,  $V$  and productivity,  $P$ . The first set of experiment was started with simple solar still and black gravel is used for productivity enhancement. The second set of experiment was conducted by augmenting the evacuated tubes to the still. The black gravel is used for productivity enhancements as used in the first experimental setup.

### Results and discussion

To increase the productivity of single basin solar still, evacuated tubes were directly coupled with the still. Further, to increase the productivity, black gravel was used to reduce the quantity of water in the basin and to increase the exposure area. Also the black gravel acted as energy storage medium and it releases the gained energy during off sunshine hours. The introduction of black gravel with evacuated tubes produced maximum output when compared to other experimental techniques. The performance affecting factors of the solar still were studied by recording various parameters.

#### Effect of solar radiation and ambient temperature

The solar still productivity is based on the influence of climatic conditions namely, intensity of solar radiation and ambient temperature prevailing in the testing location. Figure 4 shows the hourly variation of solar intensity and ambient temperature on 09.04.2009. The solar


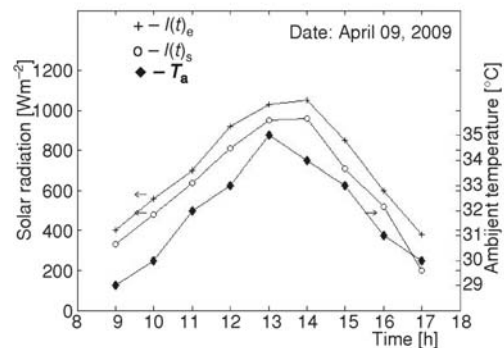


Figure 4. Variation of solar radiation and ambient temperature



radiation gradually increases with time until 2 PM and reduced towards the evening. It reaches the maximum value of  $1050 \text{ W/m}^2$ . The ambient temperature was at its minimum of  $29^\circ\text{C}$  during 9 AM and it has reached the maximum value of  $35^\circ\text{C}$  during 1 PM. The above two parameters were purely based on the local climatic conditions of the particular day.

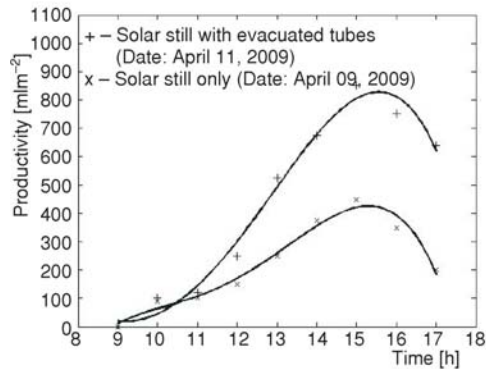


**Figure 5. Effect of augmenting evacuated tubes on still productivity**

temperature increases with time until 2 PM and reduced towards the evening. Evacuated tubes have higher efficiency than the solar still. Increased water temperature in the basin and the temperature difference between the water and inner glass temperature increased the total output of the distillate. Average increase in the productivity after coupling evacuated tube to the still was 49.7%. The daily productivity of still with evacuated tubes was 3910 ml whereas it was only 1965 ml in the absence of it.

#### *Effect of black gravel on still productivity*

Black gravel was used mainly to reduce the quantity of water in the basin. Considerable impact on productivity is achieved by the introduction of black gravel coupled with evacuated tubes.

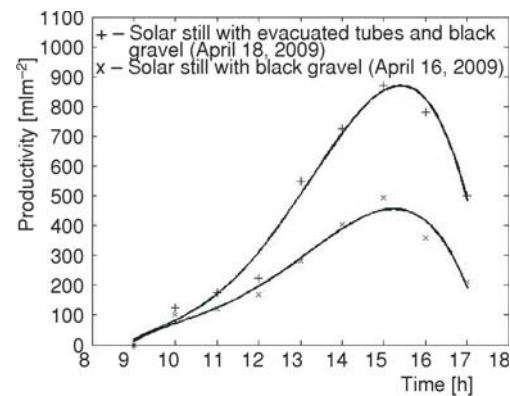

**Figure 6. Effect of black gravel on still productivity**

#### *Effect of augmenting evacuated tubes on still productivity*


The effect of coupling evacuated tubes with a solar still is shown in fig. 5. The basin water temperature is the main parameter, which affects the stills productivity. The evacuated tubes supply additional heat energy to the water in the basin, in turn to increase the water temperature. The evacuated tubes were directly coupled with still to avoid various heat losses during the circulation of water to the still. Flow of water in the evacuated tubes takes place due to the difference in the density of water, where in water at lower temperature enters through bottom side of the tube and the water with high temperature leaves through upper side of the tube and mixes with water in still basin.

The performance is sustained by filling the water up to the upper side outer diameter of the evacuated tubes. The productivity is increased by reducing the quantity of water and maintaining the same level.

The black gravel also acts as an energy storage medium and increases the capillary action during evaporation. The effects of black gravel on simple solar still and black gravel with evacuated tube are shown in fig. 6. The daily average productivity has increased by 8% while using black gravel in simple solar still and by 59.48 % with the introduction of black gravel with evacuated tubes in the simple solar still.

*Hourly variation of temperatures*

The hourly variations in the temperatures recorded in the solar still coupled with evacuated tubes on April 11, 2009, are shown in fig. 7. The complex process of measuring the temperature in the evacuated tube was performed based on the guidelines given by Indra Budiharadjo *et al.* [26]. A thermocouple was fixed to the lower side of the evacuated tube and it was taken as the inlet temperature. Three other thermocouples were fixed on the upper side of the evacuated tube and their average was taken as the outlet temperature. All the temperatures showed similar trends of increasing with the increases of solar radiation of respective during the day. It was found that the outlet evacuated tube temperature was the highest then followed by the inlet evacuated tube temperature, water temperature, vapour temperature, inside glass temperature, outside glass temperature, and temperature. The productivity of the still is determined by the temperature difference between the water and the inside glass. Introduction of evacuated tubes increased the water temperature and in turn increased the productivity. The temperature of water was raised to a maximum of 84 °C during the study period and the average ambient temperature was 31.8 °C.

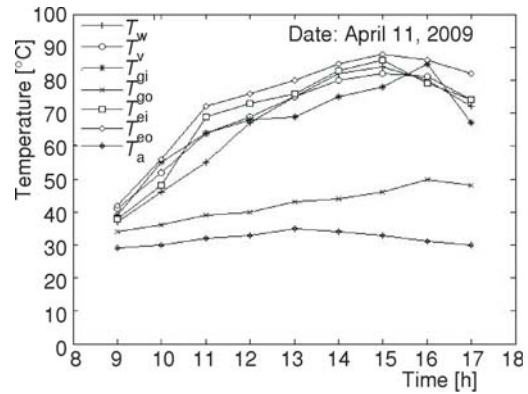

**Figure 7. Hourly variations of different temperatures**

The various active methods (flat plate collector, parabolic collector, and solar pond) used for the productivity enhancement by various researchers and the present method (evacuated tubes) are illustrated in tab. 1 in terms of percentage of increase in production.

**Table 1. Percentage increase in production for various active methods**

Sl. No.	Name of the authors	Type of active still	Increase in production [%]
1	Rai, S. N., <i>et al.</i> [2]	Flat plate collector	24
2	Badran, O. O., <i>et al.</i> [5]	Flat plate collector	36
3	Zeinab, S. Abdel-Rehim, <i>et al.</i> [18]	Parabolic collector	18
4	Velmurgan, V., <i>et al.</i> [22]	Solar pond	27.6
5	In this work	Evacuated tubes	49.7

**Economic analysis**

The payback period of the solar still coupled with evacuated tubes depends on the fabrication cost, operating cost, maintenance cost, cost of feed water and the financial subsidy offered by government sectors.

– 1 USD	= INR. 47 (Assume)
– Fabrication cost	= Rs. 12000 (\$ 212.76)
– Operating cost	= Rs. 5/day (\$ 0.1)
– Maintenance cost	= Rs. 5/day (\$ 0.1)
– Cost of feed water	= Rs. 1/day (\$ 0.02)
– Cost of distilled water	= Rs. 12/l (\$ 0.26)
– Productivity of solar still	= 5 l/day
– Cost of water produced/day	= Rs. 60 (\$ 1.28)

Subsidized cost given by government sectors is taken as 4%

– Subsidized cost	= Rs. 480 (\$ 10.21)
-------------------	----------------------

Net profit = Cost of water produced – Operating cost – Maintenance cost – Cost of feed water =  
= Rs. 49 (\$ 1.04)

Payback period = (Investment – Subsidized cost) / Net profit

– Payback period = 11520/49	= 235 days
-----------------------------	------------

## Conclusions

In this work, the solar still coupled with evacuated tubes was constructed and tested in outdoor conditions. Various experiments were carried out to enhance the productivity of the solar still. The performance of an ordinary still was compared with the still coupled with evacuated tubes. The effect of using black gravel was also studied for both the above said cases. It was found that the daily productivity has increased to 49.7% by introducing the evacuated tubes and to 59.48% by coupling evacuated tubes with gravel. Due to simplicity, low cost, less energy losses and high performance, the evacuated tubes were proved to be another option for high temperature distillation when compared to the flat plate collectors. The evacuated tubes were also efficient in the winter season. Annual yield will be more than other active methods like coupling of flat plate collector, parabolic collector *etc.* The inference of the economic analysis showed that the payback period of this system is 235 days.

## References

- [1] Prasad, R. N., Ram Chandra, Tiwari, K.K., Status of Ground Water Quality of Lalsot Urban Area in Dausa District, Rajasthan, *Journal of Nature Environment and Pollution Technology*, 7 (2008), 3, pp.377-384
- [2] Rai, S. N., Tiwari, G. N., Single Basin Solar Still Coupled with Flat Plate Collector, *Energy Conversion and Management*, 23 (1983), 4, pp.145-149
- [3] Tiris, C., *et al.*, Experimental Studies on a Solar Still Coupled with a Flat Plate Collector and a Single Basin Still, *Energy Conversion and Management*, 39 (1998), 8, pp. 853-856
- [4] Badran, A. A., *et al.*, A Solar Still Augmented with a Flat-Plate Collector, *Desalination*, 172 (2005), 3, pp. 227-234
- [5] Badran, O. O., Al-Tahainesh, H. A., The Effect of Coupling Flat-Plate Collector on the Solar Still Productivity, *Desalination*, 183 (2005), 1-3, pp.137-142
- [6] Kumar, S., Tiwari, G. N., Performance Evaluation of an Active Solar Distillation System, *Energy*, 21 (1996), 9, pp. 805-808
- [7] Singh, H. N., Tiwari, G. N., Monthly Performance of Passive and Active Solar Stills for Different Indian Climatic Condition, *Desalination*, 168 (2004), pp.145-150
- [8] Voropoulos, K., Mathioulakis, E., Belessiotis, V., Experimental Investigation of a Solar Still Coupled with Solar Collectors, *Desalination*, 138 (2001), 3, pp. 315-322



- [9] Voropoulos, K., Mathioulakis, E., Belessiotis, V., Solar Stills Coupled with Solar Collectors and Storage Tank – Analytical Simulation and Experimental Validation of Energy Behaviour, *Solar Energy*, 75 (2003), 3, pp. 199-205
- [10] Voropoulos, K., Mathioulakis, E., Belessiotis, V., A Hybrid Solar Desalination and Water Heating System, *Desalination*, 164 (2004), 2, pp. 189-195
- [11] Tiwari, G. N., Dhiman, N. K., Performance Study of a High Temperature Distillation System, *Energy Conversion and Management*, 32 (1991), 3, pp. 283-291
- [12] Tiwari, G. N., Dhiman, N. K., Parametric Studies of Active Regenerative Solar Still Distillation, *Energy Conversion and Management*, 34 (1993), 3, pp. 209-218
- [13] Yadav, Y. P., Yadav, B. P., Transient Analytical Solution of a Solar Still Integrated with a Tubular Solar Energy Collector, *Energy Conversion and Management*, 39 (1998), 9, pp. 927-930
- [14] Yadav, Y. P., Transient Performance of a High Temperature Solar Distillation System, *Desalination*, 91 (1993), pp. 145-153
- [15] Yadav, Y. P., Analytical Performance of a Solar Still Integrated with a Flat Plate Collector: Thermosiphon Mode, *Energy Conversion and Management*, 31 (1991), 3, pp. 255-263
- [16] Sodha, M. S., Kumar, A., Tiwari, G. N., Utilization of Waste Hot Water for Distillation, *Desalination*, 37 (1981), 3, pp.325-342
- [17] Singh, S. K., Bhatnagar, V. P., Tiwari, G. N., Design Parameters for Concentrator Assisted Solar Distillation System, *Energy Conversion and Management*, 37 (1996), 2, pp. 247-252
- [18] Abdel-Rehim, Z. S., Lasheen, A., Experimental and Theoretical Study of a Solar Desalination System Located in Cairo, Egypt, *Desalination*, 217 (2007), 1-3, pp. 52-64
- [19] Garcia Rodriguez, L., Gomez Camacho, C., Design Parameter Selection for a Distillation System Coupled to a Solar Parabolic through Collector, *Desalination*, 122 (1999), 2-3, pp.195-204
- [20] Mathioulakis, E., Belessiotis, V., Integration of Solar Still in a Multi Source, Multi Use Environment, *Solar Energy*, 75 (2003), 5, pp. 403-411
- [21] El-Sebaï, A. A., *et al.*, Thermal Performance of a Single Basin Solar Still Integrated with a Shallow Solar Pond, *Energy Conversion and Management*, 49 (2008),10, pp. 2839-2848
- [22] Velmurugan, V., Srithar, K., Solar Stills Integrated with a Mini Solar Pond – Analytical Simulation and Experimental Validation, *Desalination*, 216 (2007), 1-3, pp. 232-241
- [23] Dimri, V., *et al.*, Effect of Condensing Cover Material on Yield of an Active Solar Still: an Experimental Validation, *Desalination*, 227 (2008), 2-3, pp. 178-189
- [24] Tiwari, G. N., *Solar Energy: Fundamentals, Design, Modelling and Applications*, Narosa Publishing House, New Delhi, 2004
- [25] Morrison, G. L., Budihardjo, I., Behnia, M., Water-in-Glass Evacuated Tube Solar Water Heaters, *Solar Energy*, 76 (2004), 1-3, pp. 135-140
- [26] Budihardjo, I., Morrison, G. L., Behnia, M., Natural Circulation Flow Through Water-in-Glass Evacuated Tube Solar Collector, *Solar Energy*, 81 (2007), 12, pp. 1460-1472
- [27] Morrison, G. L., Budihardjo, I., Behnia, M., Measurement and Simulation of Flow rate in a Water-in-Glass Evacuated Tube Solar Water Heater, *Solar Energy*, 78 (2005), 2, pp. 257-267
- [28] Budihardjo, I., Morrison, G. L., Performance of Water-in-glass Evacuated Tube Solar Water Heaters, *Solar Energy*, 83 (2008), 1, pp.49-56
- [29] Shah, L. J., Furbo, S., Theoretical Flow Investigations of an All Glass Evacuated Tubular Collector, *Solar Energy*, 81 (2007), 6, pp. 822-828
- [30] \*\*\*, Solavis – Flat Plate Collector Vs Evacuated Tube – A Brief Overview, <http://www.solavis.com.au/>
- [31] Nafey, A. S., *et al.*, Solar Still Productivity Enhancement, *Energy Conversion and Management*, 42 (2001), 11, pp. 1401-1408