

# **ANALYTICAL SOLUTION OF TRANSIENT TEMPERATURE IN CW END-PUMPED LASER SLAB: REDUCTION OF TEMPERATURE DISTRIBUTION AND TIME OF THERMAL RESPONSE**

*Khalid S. Shibib\* , Mohammad A. Munshid and Mohammed S Hamza*

University of Technology, Department of Laser and Optoelectronics

Engineering, Baghdad-Iraq (E-mail : profkhalidsalem@gmail.com)

*An analytical solution of transient 3D heat equation based on integral transform method is derived. The result are compared with numerical solution, and good agreements are obtained. Minimization of response time and temperature distribution through a laser slab are tested. It is found that the increasing in the lateral convection heat transfer coefficient can significantly reduce the response time and the temperature distribution while no effect on response time is observed when changing pumping profile from Gaussian to top hat beam in spite of the latter reduce the temperature distribution, also it is found that dividing the pumping power between two slab ends might reduce the temperature distribution and it has no effect on thermal response time.*

Key words; *Integral transform method, slab lasers, end-pumping, thermal response, temperature distribution*

## **1. Introduction**

High average power solid state lasers suffer from the limitation of the possible heat that could be dissipated from the active element (AE). Slab shapes give an advantage of increasing the surface at which heat can flow out of the AE which increase the amount of dissipated heat that could be extracted from the AE thus increasing the possible output power by increasing the pumping power [1-3]. The maximum incident pumping power is limited by the stress fracture, which is caused by non-uniform temperature distributions in the crystals with pump loading[4], also reducing temperature distribution resulting from increasing the dissipated heat permits a significant enhancement in beam performance.

With the availability of increasing output power in laser systems as they use slab crystal, the study of their temperatures and the ability of reaching a quickly steady situation attracts much attention. The ease of high cooling rate that could be achieved on slab laser with high induced

power in satisfying the increasing demands on a high laser power system hindered the problem of reaching failure stress during operation, which may subsequently lead to medium break.

Usually, numerical method used to solve this problem, which is a time-consuming technique also it requires long exercising. To avoid these limitations , analytical solutions are preferred in solving these problems since they usually consume less time, having an explicit form so one can indicates the effect of various factors in the result with clear physical meaning[5-7]. Few literature dealt with analytical solution of transient temperature in laser slab. Some of them are that presented by Sabaieian[8] who presented analytical solution for anisotropic transient heat equation for solid state laser crystal with cubic geometry with robin boundary condition using separation of variable technique. Another work presented by Zhang et al[9] solved the heat equation in 3D model for anisotropic crystal with special boundary condition.

In this work, an analytical solution of transient three-dimensional heat equation based on integral transform method is derived, with the most possible boundary conditions and types of heat generations that could be imposed. The result is compared with numerical solutions presented by other works and good agreements are obtained, which verify the presented theory and the derived equation.

## 2.Theory:

A slab crystal is studied which is pumped from its end to induce the required population inversion that generate laser which is usually combined with heat generation within the slab. The study of thermal effect on laser slab could be achieved by obtaining its temperature distribution which could be obtained by solving the transient 3D heat equation, see fig1a, then[10]

$$k_x \frac{\partial^2 T}{\partial x^2} + k_y \frac{\partial^2 T}{\partial y^2} + k_z \frac{\partial^2 T}{\partial z^2} + \dot{Q} = \rho c \frac{\partial T}{\partial t} \quad (1)$$

Here  $k_x, k_y, k_z$  are the thermal conductivities in W/m/K for x,y,z directions respectively.  $\rho$  is mass density(kg/m<sup>3</sup>), c is specific heat(J/kg.K),  $\dot{Q}$  is heat source density (W/m<sup>3</sup>), T is temperature in ( degree ° K).

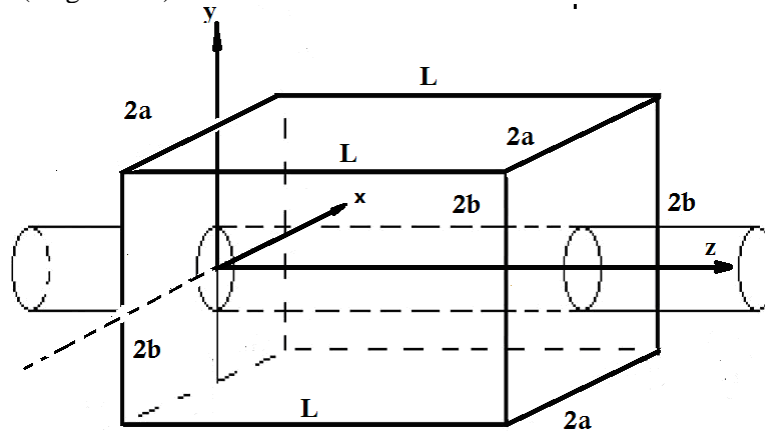


Fig 1a. laser slab geometry and pumping location

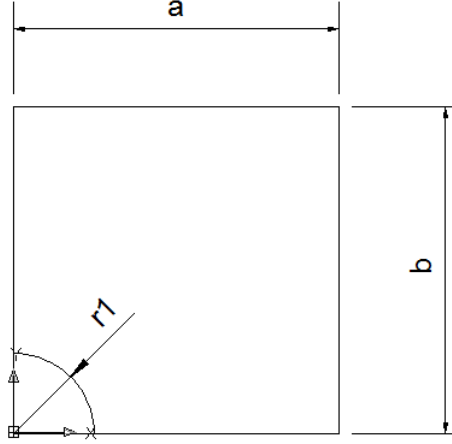


Fig 1 b. First quadrant for the face of slab where a,b is the transverse dimensions of the slab.  $r_1=a$  for top hat beam and  $=2 w_p$  for Gaussian beam.

This equation can be solved by the successive application of integral transform to the x,y and z variables, The part of absorbed power that converts to heat act as a heat source and it can has different profile[5,6,11];

### 2.1.1 Gaussian transverse profile

a) For one end pumping

$$\dot{Q}(x, y, z, t) = \frac{2\eta\alpha P_{ab}}{\pi w_p^2} \exp\left[-\frac{2(x^2 + y^2)}{w_p^2} - \alpha z\right] \quad (2)$$

Where  $\eta$  is thermal factor,  $\alpha$  is the absorption coefficient,  $P_{ab}$  is the absorption power,  $w_p$  waist radius of pumping beam

b) For dual end pumping

$$\dot{Q}(x, y, z, t) = \frac{2\eta\alpha P_{ab}}{\pi w_p^2} \exp\left(-\frac{2(x^2 + y^2)}{w_p^2}\right) [\exp(-\alpha z) + \exp(-\alpha(l - z))] \quad (3)$$

Where  $l$  - is the length of laser slab and x,y are coordinates in (m)

### 2.1.2 Top-hat transverse profile

a) For one end pumping

$$\dot{Q}(x, y, z, t) = \frac{\eta\alpha P_{ab}}{\pi a^2} \exp(-\alpha z) \quad (4)$$

Where a-is the radius of top-hat beam

b) For dual end pumping

$$\dot{Q}(x, y, z, t) = \frac{\eta\alpha P_{ab}}{\pi a^2} \{ \exp(-\alpha z) + \exp[-\alpha(l - z)] \} \quad (5)$$

the last term in eqs 3,5 represent the additional pumping source from the second end.

The Basic steps in the solution of the problem can be summarized as follow:

a-develop the appropriate integral transform equations.

b-remove the partial derivative from the differential equation.

c-solve the resulting ordinary for the transformation of temperature subjected to the transform initial condition.

then the general solution for 3D domain can be written as[10]

$$\theta(x, y, z, t) = T(x, y, z, t) - T_\infty = \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} \sum_{p=1}^{\infty} \frac{X(\beta_m, x)Y(\gamma_n, y)Z(\eta_p, z)}{N(\beta_m)N(\gamma_n)N(\eta_p)} \times \exp\left(-\frac{k}{\rho c}(\beta_m^2 + \gamma_n^2 + \eta_p^2)t\right) \times \left[\frac{1}{\rho c} \int_{t=0}^t \exp\left(\frac{k}{\rho c}(\beta_m^2 + \gamma_n^2 + \eta_p^2)t'\right) \bar{g}(\beta_m, \gamma_n, \eta_p, t') dt'\right] \quad (6)$$

Here  $T_\infty$  is the ambient temperature which is usually taken to be equal to  $25^\circ \text{C}$  which is also equal to the initial temperature distribution through the slab.  $N(\beta_m), N(\gamma_n), N(\eta_p)$  are the norms which are the square integral of Eigen functions X,Y,Z at roots  $\beta_m, \gamma_n, \eta_p$  of the equations ,respectively. The triple transform is defined as:

$$\bar{g}(\beta_m, \gamma_n, \eta_p, t') = \int_{x=0}^a \int_{y=0}^b \int_{z=0}^L X(\beta_m, x')Y(\gamma_n, y')Z(\eta_p, z') g(x', y', z', t') dx' dy' dz' \quad (7)$$

The eigenfunctions, the normaltion integrals and the eigenvalues are obtained depending on the boundary conditions. Due to symmetrical nature of the problem then only first quadrant of the slab is account for where the boundary conditions are:

**a)** The front and back surface of laser slab are commonly both exposed to stagnation ambient air (i.e. at  $z=0$  and  $z= l$ ) where  $l$  is the length of the slab then

$$Z(\eta_p, z) = (\eta_p \cos(\eta_p z) + H_a \sin(\eta_p z)) \quad (8)$$

Where  $H_a = \frac{h_a}{k}$  and  $h_a$  is the convection heat transfer coefficient at the ends surfaces of the slab  $=27.5 \text{ W/m}^2 / \text{K}$  and its Norm is

$$N(\eta_p) = 0.5 \left[ (\eta_p^2 + H_a^2) \left( l + \frac{H_a}{\eta_p^2 + H_a^2} \right) + H_a \right] = 0.5 \left[ (\eta_p^2 + H_a^2) l + 2H_a \right] \quad (9)$$

While the Eigenvalues are the positive roots of

$$\tan \eta_p l = \frac{2\beta_m H_a}{\eta_p^2 - H_a^2} \quad (10)$$

**b)** convection boundary conditions are assumed at the outer lateral slab surfaces . Since only one quadrant is studied due to symmetrical nature of the problem then insulated boundary conditions are assumed at zero x-axis and y-axis coordinates (i.e. symmetrical pumping and symmetrical boundary conditions).These cases are generally acceptable boundary conditions in the slab

geometry that usually used as laser medium. For insulated inside surfaces and convection boundary conditions at the outer surfaces, the Eigen function can be written as

$$Y(\gamma_n, z) = \cos \gamma_n y \text{ and } X(\beta_m, z) = \cos \beta_m x \quad (11)$$

And the Norms are:

$$N(\beta_m) = 0.5 \left[ \frac{a(\beta_m^2 + H_c^2) + H_c}{\beta_m^2 + H_c^2} \right] \quad (12 a)$$

$$N(\gamma_n) = 0.5 \left[ \frac{b(\gamma_n^2 + H_c^2) + H_c}{\gamma_n^2 + H_c^2} \right] \quad (12 b)$$

Where  $H_c = \frac{h_c}{k}$  and  $h_c$  is the coefficient of convection heat transfer from the lateral surfaces of the slab assume its value is 20000 W/m<sup>2</sup>/K unless other mentioned.

While the Eigenvalues are the positive roots of

$$\beta_m \tan \beta_m a = H_c \quad (13)$$

$$\text{and } \gamma_n \tan \gamma_n b = H_c \quad (14)$$

It is assumed that the Rayleigh length is much greater than the length of the laser slab so that the pumping radius is assumed to be approximately constant through the laser slab then the transform function  $g$  in eq. 7 can be written for the two types of pumping beam profile as :

**a) for circular Gaussian beam distribution**

$$g_{mp}(\tau) = \int_{x=0}^{2w_p} \int_{y=0}^{2w_p} \int_0^\ell \frac{2\eta\alpha P_{ab}}{\pi w_p^2} \exp(-2r^2/w_p^2 - \alpha z) \cos(\beta_m x) \cos(\gamma_n y) (\eta_p \cos(\eta_p z) + H_a \sin(\eta_p z)) dx dy dz \quad (15)$$

Where  $r^2 = x^2 + y^2$ . Assume the pumping radius is equal to twice the waist radius of the pumping beam so that 99.9% of the pumping power is included.

**b) for circular top hat pumping beam**

$$g_{mp}(\tau) = \int_{x=0}^{r_1} \int_{y=0}^{r_1} \int_0^\ell \frac{\eta\alpha P_{ab}}{\pi r_1^2} \exp(-\alpha z) \cos(\beta_m x) \cos(\gamma_n y) (\eta_p \cos(\eta_p z) + H_a \sin(\eta_p z)) dx dy dz \quad (16)$$

Here  $r_1$  is the radius of top hat pumping beam =  $2 w_p$ ,

These integrals can be carried out numerically to obtain the final value of the functions.

Replacing the form of Norms, and carrying the time integration, the final form of eq. 6 can be written as( for convection at the sides of slab and at slab ends):

$$\theta = T - T_\infty = \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} \sum_{p=1}^{\infty} \frac{4 \cos(\beta_m x) \cos(\gamma_n y) (\eta_p \cos(\eta_p z) + H_a \sin(\eta_p z)) (\beta_m^2 + H_c^2) (\gamma_n^2 + H_c^2)}{(a(\beta_m^2 + H_c^2) + H_c)(b(\gamma_n^2 + H_c^2) + H_c)k(\beta_m^2 + \gamma_n^2 + \eta_p^2)} \times [1 - \exp\left(-\frac{k}{\rho c}(\beta_m^2 + \gamma_n^2 + \eta_p^2)t\right)] \cdot g_{mp}(t) \quad (17)$$

Even this form is derived for laser slab that has convection boundary conditions from its six facets; it can be used for lateral surfaces of the slab that have zero temperature difference between the surface and ambient temperature by increasing convection heat transfer coefficient. Insulated front and back surfaces of laser slab can be simulated by reducing the convection heat transfer coefficient to the stagnant air much beyond than that of the naturally cooled surface (i.e. much less than  $27.5 \text{ W/m}^2/\text{K}$ .)

### 3. Validation:

The steady state maximum temperature obtained from this work is compared with that obtained from reference [10] where different pumping power are tested for the same slab and boundary conditions including the circular Gaussian beam with two different waist beam (0.4 and 0.225mm). The percentage of maximum difference between the results between numerical solution for unsaturated condition and the analytical solution of this work were found to be equal to 3.8%., see table I and II in reference [9].

Also, the result of this work is compared with numerical solution for the temperature distribution in an Nd:YAG conventional slab where a laser slab having  $3 \times 3 \times 5 \text{ mm}^3$ . The thermal and optical properties of Nd:YAG were taken from reference [12]. The slab is end pumped by Gaussian beam having waist beam radius of 0.225mm, assume the convection boundary conditions is as that mentioned earlier (i.e.  $h_a = 27.5 \text{ W/m}^2 / \text{K}$ ,  $h_c = 20000 \text{ W/m}^2 / \text{K}$ ), the heat load (i.e.  $\eta P_{ab}$ ) was 5W, a very nearby result was obtained which verified the steady state temperature distribution solution , see fig 2.

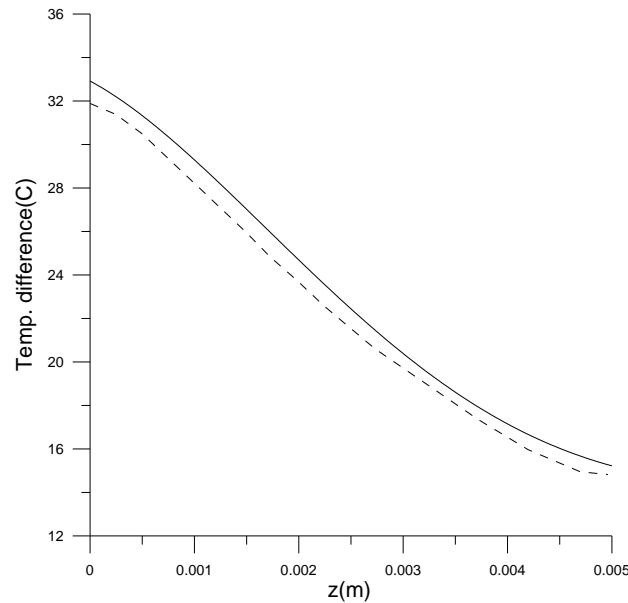


Fig 2. Temperature distribution through longitudinal axis of the slab , solid line indicates analytical solution of this work , dashed line indicated numerical solution as obtained by reference [12].

### 4. Result and discussion

In this work, the analytical solution of transient temperature distribution through the laser slab that end pumped by either Gaussian or top hat beam is derived based on integral transform method. The effect of different boundary conditions, type of pumping (top-hat or Gaussian beam), and one or dual end pumping are studied to predict how a rapid response can be achieved and how to reduce the temperature distributions through the laser slab. Replacing the values of Norms , obtaining the values of the roots together with slab dimensions of  $3 \times 3 \times 5 \text{ mm}^3$  which has a convection boundary conditions of  $h_a = 27.5 \text{ W/m}^2 / \text{K}$  and  $h_c = 20000 \text{ W/m}^2 / \text{K}$ . The thermal and optical properties of Nd:YAG is taken from reference [11], then the transient temperature distribution can be obtained using eq(17).

It is found that increasing convection heat transfer coefficient can speed the thermal response, this is explainable since more rate of energy will transfer out of the slab which reduces the time required to achieve thermal equilibrium( named as time of thermal response) , see fig 3. Note that this time is equal to the time where the temperature everywhere in the domain is equal to 99% of its steady state value). Also the temperature distribution (including the maximum temperature that could be reached in the slab) is reduced as the convection heat transfer coefficient increase, see figs 3-5.

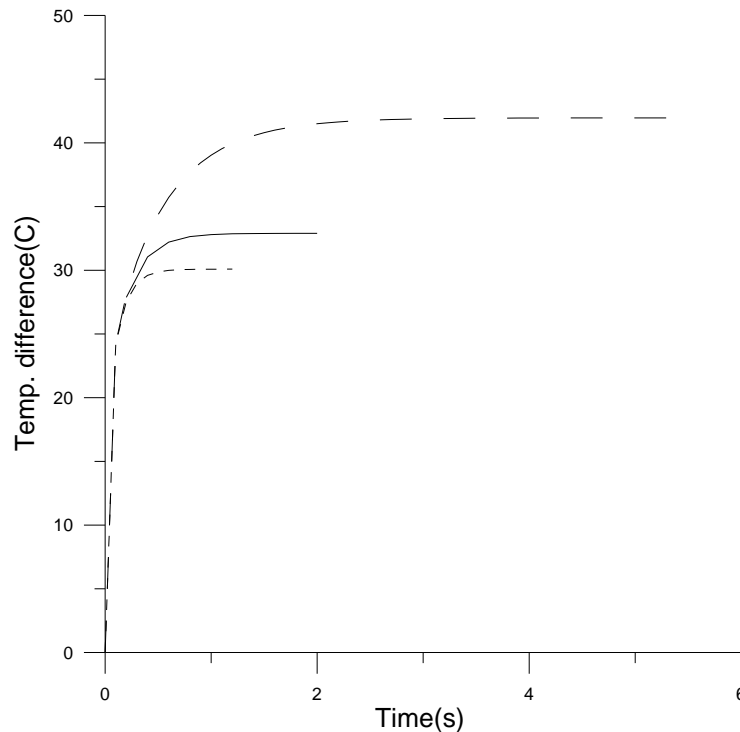


Fig 3. Temperature history of maximum temperature is laser slab at  $x,y,z=0$ . Solid line for  $h_c = 20000 \text{ W/m}^2 .\text{K}$ , long dashed line for  $h_c = 5000 \text{ W/m}^2 / \text{K}$ , small dashed line for  $h_c = 100000 \text{ W/m}^2 / \text{K}$

Changing pumping profile from Gaussian to top-hat beam leads to decrease in the temperature distribution that could be reached in laser slab assuming constant convection heat transfer coefficient and environmental temperature, see figs 4,6. It is observed that changing beam profile has insignificant effect on the time at which steady state temperature distribution could be reached. This phenomenon is explainable since the time of reaching steady state depends mainly on the amount of heat that induced to the slab and the boundary conditions and since these

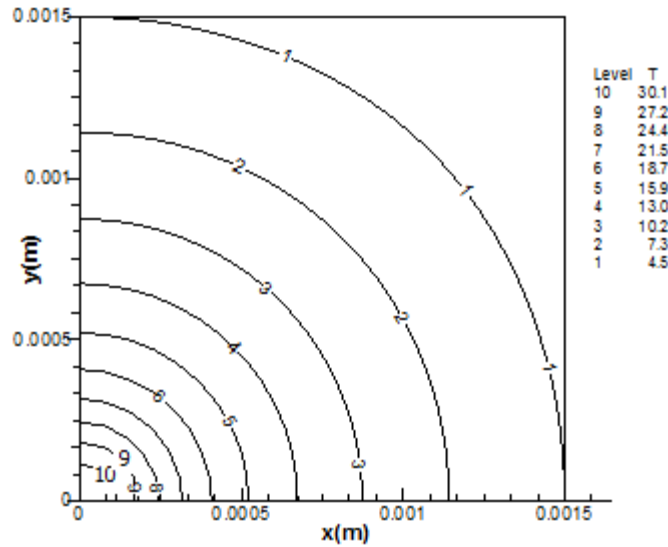


Fig 4. Temperature distribution at steady state situation at  $z=0$  where the max. temperature  $=32.9^{\circ}\text{C}$ , the slab is one end pumped by Gaussian beam ,  $h_c=20000\text{W/m}^2/\text{K}, h_a=27.5\text{W/m}^2/\text{K}$ .

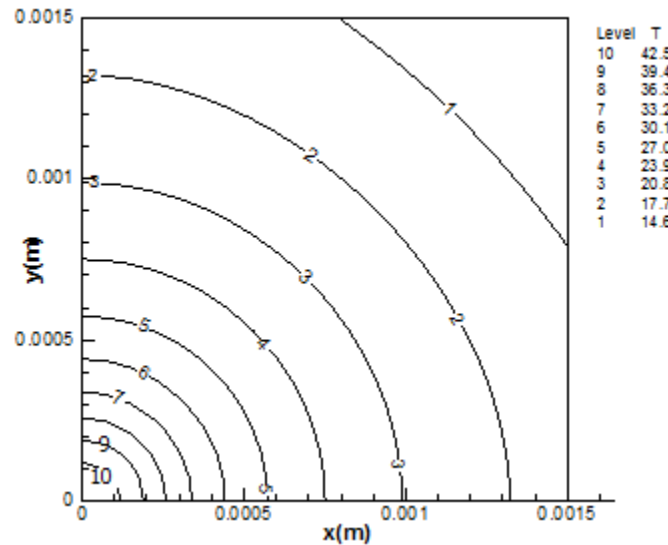


Fig 5. Temperature distribution at steady state situation at  $z=0$ , the slab is one end pumped by Gaussian beam ,  $h_c=5000\text{W/m}^2/\text{K}, h_a=27.5\text{W/m}^2/\text{K}$

parameters are constant then one can expect that the changing of beam profile has no effect on response time, see fig7.

The pumping power can be divided between the two ends of the slab, where the same output laser power could be obtained comparing with one end pumped slab. No effect on the time required to reach thermal equilibrium is observed as the pumping is changed from one to dual end pumping, this is due to the fact that the same energy is induced to the slab cooled by convection



which has no effect on response time, see fig 8. Dividing the pumping power between the two ends of the slab for Gaussian or top hat pumping beam profile result in significant reduction in the temperature distribution through the slab for the aforementioned pumping profiles, this include of course the maximum temperature that could be reached in the slab( at the center of the end faces),see figs 5,9.

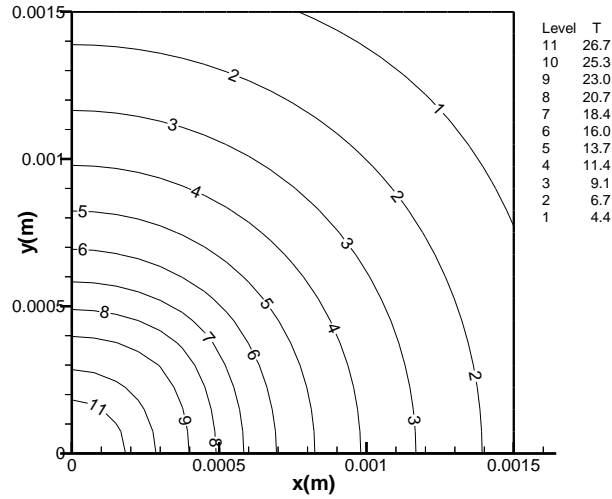


Fig 6. Temperature distribution at steady state situation at  $z=0$  where the max temperature  $=27.67^{\circ}\text{C}$ , the slab is one end pumped by top-hat beam ,  $h_c=20000$

$$\text{W/m}^2/\text{K}, h_a = 27.5 \text{ W/m}^2/\text{K}$$

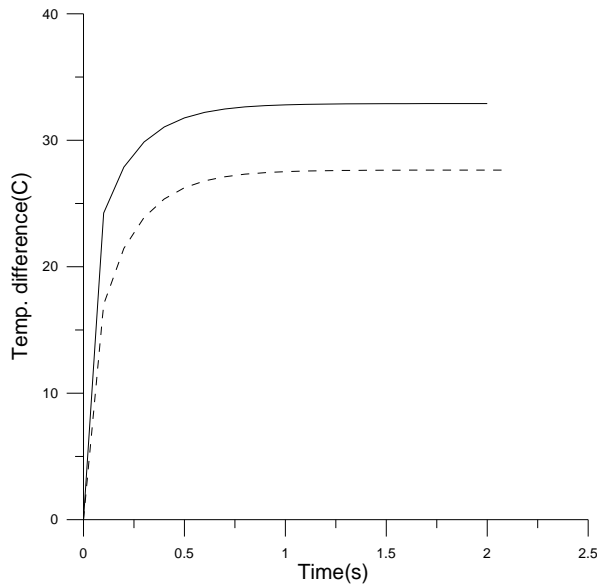


Fig 7. Temperature history of maximum temperature is laser slab at  $x,y,z=0$  where  $h_c=20000$   $\text{W/m}^2/\text{K}$ , solid line for Gaussian beam distribution, dashed line for top-hat beam where its radius is equal to  $2w_p$ .

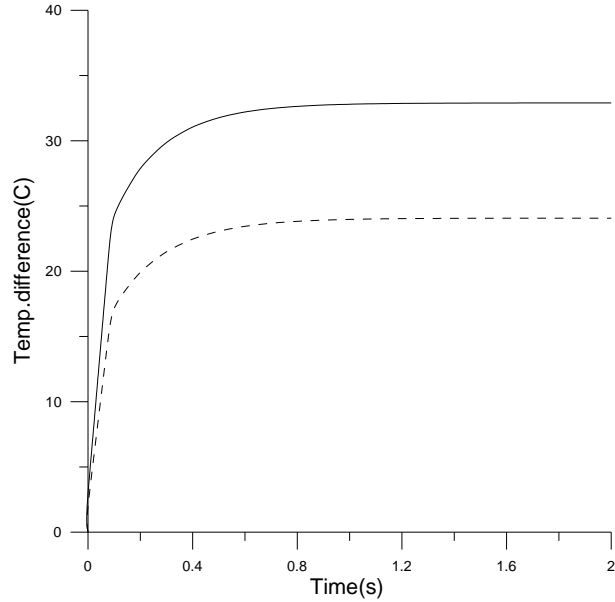


Fig 8. Temperature history of maximum temperature is laser slab where  $h_c=20000 \text{ W/m}^2/\text{K}$ , solid line for one end Gaussian beam pumping ,dashed line for dual Gaussian end pumping.

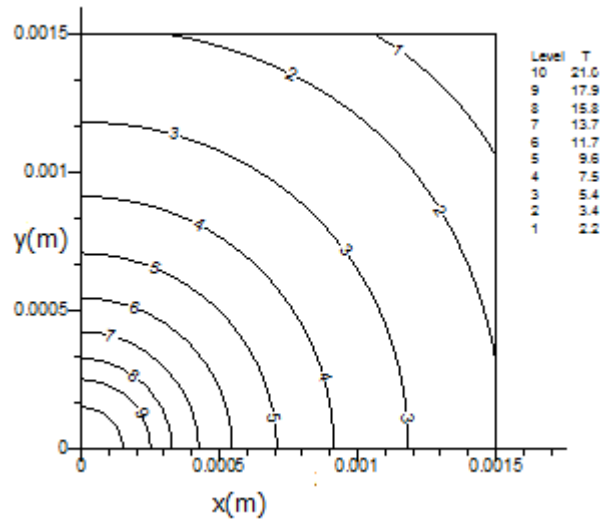


Fig 9. Temperature distribution at steady state situation at  $z=0$ , the slab is dual end pumped by Gaussian beam ,  $h_c=20000 \text{ W/m}^2/\text{K}$ ., Max Temp.= $24^\circ \text{C}$ .

## 5. Conclusions

In this work, the integral transform method has been used to derive an analytical solution of transient temperature distribution in laser slab. The effect of different boundary conditions, pumping beam profile, pumping method on temperature distribution are obtained and the speed of response time for these conditions have been predicted. It is found that for the same total amount of pumping power , even that the dividing of the pumping power over the two laser slab ends reduces the temperature distribution in laser slab; it has no effect on the response time.

It is also found that the higher the lateral convection heat transfer coefficient, the lesser the time required to achieve thermal equilibrium. Also it is found that the profile of pumping beam profile

has no effect on response time even though the top hat beam can reduce the temperature distribution through the laser slab.

The obtained results are compared with previously published data and good agreements are found which verified the used theory and method of solution. The obtained analytical solution can be very useful to designers in obtaining a device that could reach thermal equilibrium quickly where the designed laser parameters could be obtained and reduce the temperature distribution where good beam characteristic and safe operation conditions far away from failure stress could be obtained. It is worthwhile to mention that the anisotropic properties can be handled through some extension of the derived equation also slab rectangular cross section can be used instead of square cross section. These are aims of the new paper for the authors.

### References:

- [1] Rüdiger Paschotta, Jürg Aus der Au and Ursula Keller, Thermal Effects in High-Power End-Pumped Lasers with Elliptical-Mode Geometry, *IEEE Journal of selected Topics in Quantum electronics* , 6 (2000) 4,pp. 636-642
- [2] J. M. Eggleston (et.al), The Slab Geometry Laser-Part I: Theory, *IEEE J.of Quantum electronics*, 20(1984) 3, pp.289-301
- [3] T. Kane, J. Eggleston and Byer, The slab geometry –II : Thermal effect in a finite slab ,*IEEE J. Quantum electronics*, 21(1985) 8,pp.1195-1210
- [4] Xiaoyuan Peng, (et.al), Study of the mechanical properties of Nd:YVO<sub>4</sub> crystal by use of laser interferometry and finite-element analysis, *Applied Optics*, 40(2001) 9 ,pp.1396-1403
- [5] Khalid S. Shibib, Mayada M. Tahir and Mohammad A. Mahdi, Analytical treatment of transient temperature and thermal stress distribution in CW end pumped laser rod :thermal response optimization study , *Thermal science*, 18(2014)2,pp.399-408
- [6] Khalid S. Shibib (et.al), Analytical model of transient temperature and thermal stress in continuous wave double-end-pumped laser rod: Thermal stress minimization study, *Pramana*, 79(2012)2,pp.287-297
- [7] Khalid S. Shibib (et.al), Analytical model of transient thermal effect on convective cooled end-pumped laser rod , *Pramana*, 81(2013) 4,pp.603-618
- [8] Sabaeian, Analytical solutions for anisotropic time dependent heat equations with robin boundary condition for cubic shaped Solid State laser crystals. *Applied optics*, 51(2012)30,pp.7150-7159
- [9] L.L.Zhang , P. Shi and L.L., semianalytical thermal analysis of rectangle Nd:GGG in heat capacity laser . *Applied Physics B* 101(2010),pp.137-142
- [10] M. N. Özisik, *Heat conduction* .Wiley, New York (1980)
- [11] Z. Xiong, Zhigang G. Li, Nicholas Moore, W.L. Huang and G.C. Lim, Detailed Investigation of thermal effects in Longitudinally Diode-pumped Nd:YVO<sub>4</sub> Lasers, *IEEE Journal of Quantum Electronics*, 39 (2003) 8,pp. 979 - 986
- [12] E. Stupak, R. Kacianauskas, A.S. Dementjev, and Jovaisa, Coupled finite element analysis of composite laser rods thermal characteristics under longitudinal diode pumping, III European conference on computational Mechanics solid , structure and coupled problem in engineering Lisbon, Portugal ,(2006) pp.1-10