

ANALYTICAL STUDY OF UNSTEADY SEDIMENTATION ANALYSIS OF SPHERICAL PARTICLE IN NEWTONIAN FLUID MEDIA

Mehdi FAKOUR ^{a*}, Alireza RAHBARI ^{b,c}, Hesam MOGHADASI ^d, Iman RAHIMIPETROUDI ^a,
Davood DOMAIRRY GANJI ^e, Mostafa VARMAZYAR ^b

^a Young Researchers and Elites Club, Sari Branch, Islamic Azad University, Sari, Iran

^b Department of Mechanical Engineering, Shahid Rajaei Teacher Training University, Tehran, Iran

^c Research School of Engineering, The Australian National University, Canberra, ACT 2601, Australia

^d Combustion Research Laboratory, School of Mechanical Engineering, Iran University of Science and Technology (IUST), Tehran, Iran

^e Department of Mechanical Engineering, Sari Branch, Islamic Azad University, Sari, Iran

Unsteady settling behavior of solid spherical particles falling in water as a Newtonian fluid is investigated in this research. Least square method (LSM), Galerkin method (GM), LSM - Padé and numerical model are applied to analyze the characteristics of the particles motion. The influence of physical parameters on terminal velocity is discussed and it is showed that LSM and GM are efficient techniques for solving the governing equation. Among these methods, LSM-Padé demonstrates the best agreement with numerical results. The novelty of this work is to introduce new analytical methods for solving the nonlinear equation of sedimentation applicable in many industrial and chemical applications.

Key words: *Spherical particles, Acceleration motion, LSM, GM, LSM- Padé.*

1. Introduction

Description of the motion of immersed bodies in fluids has long been a subject of great interest due to its wide range of applications in industry e.g. sediment transport, deposition in pipelines, alluvial channels, etc. [1–2]. The settling mechanism of solid particle, bubble, or drop, both in Newtonian and non-Newtonian fluids, is reported by Clift et al. [3] and Chhabra [4] and several types of drag coefficients for spherical and non-spherical particles were presented by Haider and Levenspiel [5]. Guo [6] and Mohazzabi [7] have studied the behavior of spheres and objects falling into fluids.

A particle falling vertically in a stationary fluid under the influence of gravity accelerates until the gravitational body force is balanced by the resistance forces, including buoyancy and drag forces. At the equilibrium, particle reaches a constant velocity so-called “terminal velocity” or “settling velocity”. The knowledge of the terminal velocity of solids and particles falling in liquids is required in many industrial applications such as mineral processing, hydraulic transport, fluidized bed reactors and so on [3].

* Corresponding author. Tel.: +989119579177;
E-mail address: mehdi_fakour@yahoo.com

Recently, several attempts have been made to develop analytical tools to solve the motion equation of falling objects in fluids. Ganji [8] employed Variational Iteration Method (VIM) and derived a semi-exact solution for the instantaneous velocity of the particle over time, setting in incompressible fluid. Yaghoobi and Torabi [9] investigated the acceleration motion of a vertically falling on-spherical particle in incompressible Newtonian media by VIM. They developed their model for the combined VIM with Padé approximation for modeling the non-spherical particle equation of motion [10]. More applications of VIM for solving the nonlinear differential equations are presented by Mohyud-Din et al. [11].

Jalaal et al. [12] used Homotopy Analysis Method (HAM) and obtained the solution of the one-dimensional non-linear particle equation. The same group [13] applied He's homotopy perturbation method (HPM) [14, 15] to solve the acceleration motion of a vertically falling spherical particle in incompressible Newtonian media. MohyudDin et al. [16] used HPM for solving a wide class of nonlinear problems and they suggest that this method is capable to cope with the versatility of the physical problems such as sedimentation process, the system of linear partial differential equations for waves [17] and MHD flow over nonlinear stretching sheeting [18]. Torabi and Yaghoobi [19] combined HPM with Padé approximation for increasing the solution accuracy of the particle equation of motion. The motion of a spherical particle rolling down an inclined plane in Newtonian media was studied by Jalaal et al. [20, 21].

There are some simple and accurate approximation techniques for solving nonlinear differential equations called the Weighted Residuals Methods (WRMs). Collocation, Galerkin and Least Square Method (LSM) are examples of the WRMs which are introduced by Ozisik [22] for using in heat transfer problem. Stern and Rasmussen [23] used collocation method for solving a third order linear differential equation. Vaferi et al. [24] have studied the feasibility of applying of Orthogonal Collocation method to solve diffusivity equation in the radial transient flow system. Recently Hatami et al. [25] used DTM, CM and LSM for predicting the temperature distribution in a porous fins with temperature dependent internal heat generation. Moreover, Hatami and Ganji [26-29] studied the motion of a spherical particle using different analytical methods: DQM, DTM and DTM-Padé. The application of analytical methods in solving the nonlinear problems in MHD and nanofluid flow has also been reported in [30-38].

In this paper, after following the recent progress and the outcome made by [26-29] in the analytical methods, LSM-Padé method is employed to solve the unsteady particle spherical motion equation and its obtained results have been compared with the ordinary LSM, GM and numerical methods. This is concluded that the proposed method has got a better agreement with the numerical model.

2. Problem Description

The particle sediment phenomenon is modelled using gravity, buoyancy, Drag forces and added mass. According to the Basset-Boussinesq-Ossen (BBO) equation for the unsteady motion of the particle in a fluid, for a dense particle falling in light fluids assuming $\rho \ll \rho_s$ Basset history force is negligible. So by rewriting force balance for the particle, the equation of motion is gained as follows [19],

$$m \frac{du}{dt} = mg \left(1 - \frac{\rho}{\rho_s} \right) - \frac{1}{8} \pi D^2 \rho C_D u^2 - \frac{1}{12} \pi D^3 \rho \frac{du}{dt} \quad (1)$$

where C_D is the drag coefficient. In the right hand side of the equation (1), the first term represents the buoyancy effect, the second term corresponds to drag resistance, and the last term is the added mass effect due to acceleration of fluid around the particle. The main difficulty of solving equation (1) is the non-linear terms due to the non-linearity nature of the drag coefficient C_D . The suggested correlation for C_D of spherical particles which has a good agreement with the experimental data in a wide range of Reynolds number $0 \leq Re \leq 105$ is formulated by:

$$C_D = \frac{24}{Re} \left(1 + \frac{1}{48} Re \right) \quad (2)$$

Jalaal et al. [13] have shown that equation (2) represents a more accurate resistance of the particle in comparison with the pervious equations presented by others. Based on the mass of particle formulated by:

$$m = \frac{1}{6} \pi D^3 \rho_s \quad (3)$$

Equation (1) can be rewritten as

$$a \frac{du}{dt} + bu + cu^2 - d = 0, \quad u(0) = 0 \quad (4)$$

Where

$$a = \frac{1}{12} \pi D^3 (2\rho_s + \rho) \quad , \quad b = 3\pi D \mu \quad , \quad c = \frac{1}{16} \pi D^2 \rho \quad , \quad d = \frac{1}{6} \pi D^3 g (\rho_s - \rho) \quad (5)$$

In the present study, we choose three different materials for solid particle, Aluminum, Copper and Lead with three different diameters (1, 3, and 5 mm). A schematic of the described problem is shown in Fig 1. Physical properties of the selected material as well as the resulted coefficients used in equation (5) are summarized in Tables 1 and 2, respectively. It is needed to note that the more complicated problem addressing this observation has been reported by several researchers. However, the application of new analytical methods has been introduced in this research as a new concept.

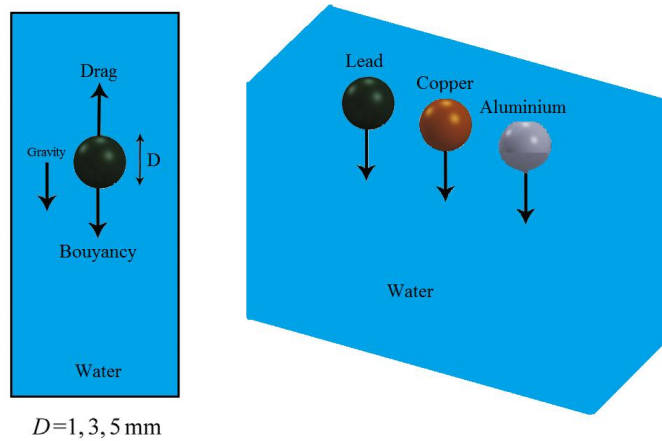


Figure 1. Schematic picture of free falling spherical particles in a Newtonian fluid [26]

Table 1. Properties of the selected materials

Material	Density/(kg/m ³)	Viscosity/(kg/(m.s))
Aluminum	2702	-
Copper	8940	-
Lead	11340	-
Water	996.51	0.001

Table 2. Coefficient in equation (4)

Particle material	Diameter/mm	a	b	c	d
Aluminum	1	0.0000016756496	0.00000942477796	0.000195664281	0.000008760256
	3	0.0000452425392	0.00002827433389	0.001760978529	0.000236526917
	5	0.0002094562001	0.00004712388981	0.004891607024	0.001095032024
Copper	1	0.0000049418587	0.00000942477796	0.000195664281	0.000040801768
	3	0.0001334301866	0.00002827433389	0.001760978529	0.001101647738
	5	0.0006177323456	0.00004712388981	0.004891607024	0.005100221010
Lead	1	0.0000061984958	0.00000942477796	0.000195664281	0.000053129377
	3	0.0001673593872	0.00002827433389	0.001760978529	0.001434493196
	5	0.0007748119783	0.00004712388981	0.004891607024	0.006641172207

3. Analytical Methods

3.1. Least Square Method (LSM)

As Sheikholeslami, Hatami and Ganji [28] mentioned least square method is one of the weighted residual methods which are constructed on minimizing the residuals of the trial function introduced to the nonlinear differential equation. The principle of LSM is based on a differential operator D acting on a function u to produce a function p :

$$D(u(x)) = p(x) \quad (6)$$

It is considered that u is estimated by a function, \tilde{u} which is a linear combination of fundamental functions chosen from a linearly independent set. This is,

$$u \cong \tilde{u} = \sum_{i=1}^n c_i \varphi_i \quad (7)$$

by substituting equation (9) into the differential operator, D , the result of the operations generally isn't $p(x)$ and a difference will be appeared. Hence an error or residual will exist as follows:

$$R(x) = D(\tilde{u}(x)) - p(x) \neq 0 \quad (8)$$

The main concept of LSM is to make the residual become zero over the domain. Hence:

$$\int_x R(x) W_i(x) = 0 \quad i = 1, 2, \dots, n \quad (9)$$

Where the number of weight functions W_i , is accurately equal the number of unknown coefficients c_i . The result is a set of n algebraic equations for the undefined coefficients c_i . If the continuous summation of all the squared residuals is minimized, the rationale behind the LSM's name can be seen. In other words, a minimum of

$$S = \int_x R(x)R(x)dx = \int_x R^2(x)dx \quad (10)$$

In order to achieve a minimum of this function equation (10), the derivatives of S with respect to all the each unknown parameter should be zero as:

$$\frac{\partial S}{\partial c_i} = 2 \int_x R(x) \frac{\partial R}{\partial c_i} dx = 0 \quad (11)$$

Comparing with equation (11), the weighted functions for LSM will be,

$$W_i = 2 \frac{\partial R}{\partial c_i} \quad (12)$$

By neglecting the constant coefficient, the weighted functions W_i for the Least Squares Method are the derivatives of the residuals with respect to the unknown constants:

$$W_i = \frac{\partial R}{\partial c_i} \quad (13)$$

3.2. Padé approximation

There are some techniques to increase the convergence of series. Among them, the Padé technique is widely applied. Suppose that a function $f(\eta)$ is represented by a power series so that:

$$f(\eta) = \sum_{i=0}^{\infty} c_i \eta^i \quad (14)$$

This expansion is the fundamental starting point of any analysis using Padé approximants. The notation c_i , $i = 0, 1, 2, \dots$ is reserved for the given set of coefficients:

$$P[L, M] = \frac{a_0 + a_1 \eta + \dots + a_L \eta^L}{b_0 + b_1 \eta + \dots + b_M \eta^M} \quad (15)$$

2.3. LSM-Padé

It should be noted that the trial solution must satisfy the boundary conditions, so the trial solution can be written as:

$$u(t) = c_6 t^6 + c_5 t^5 + c_4 t^4 + c_3 t^3 + c_2 t^2 + c_1 t \quad (16)$$

By introducing this equation into equation (4) residual function will be found and by substituting the residual function into equation (16) a set of equations with six equations and six unknown coefficients will be appeared and by solving this system of equations, coefficients C_1 - C_6 will be determined. By using LSM when $a = b = c = d = 1$, following equation will be determined for velocity of spherical particles in Newtonian fluid media.

$$u(t) = 0.03368239895t^6 - 0.180492214t^5 + 0.3593344626t^4 - 0.1842649152t^3 - 0.4978433912t^2 + 0.9999134150t \quad (17)$$

After obtaining the result of LSM-Padé, approximation is applied for variations of particle velocities. The Padé technique for variations of velocity at $a = b = c = d = 1$ gives:

$$u(t)(LSM - pade [3-3]) = \frac{(0.9999134149t + 1.531206359t^2 + 0.05828486567t^3)}{(1 + 2.029225450t + 1.252894743t^2 + 0.6383812347t^3)} \quad (18)$$

4. Results and discussion

In the present study, different analytical methods are applied to obtain an explicit analytic solution of the unsteady settling behavior of solid spherical particles falling in water as a Newtonian fluid. Fig 2 illustrates the comparison between the LSM, LSM- Padé, GM with numerical method for $a = b = c = d = 1$. As observed, Padé approximation [3/3] leads to the results closer to the numerical solution. After claiming the compatibility and accuracy of this model, aluminium and copper as well as Lead are selected in various sizes submerged in water.

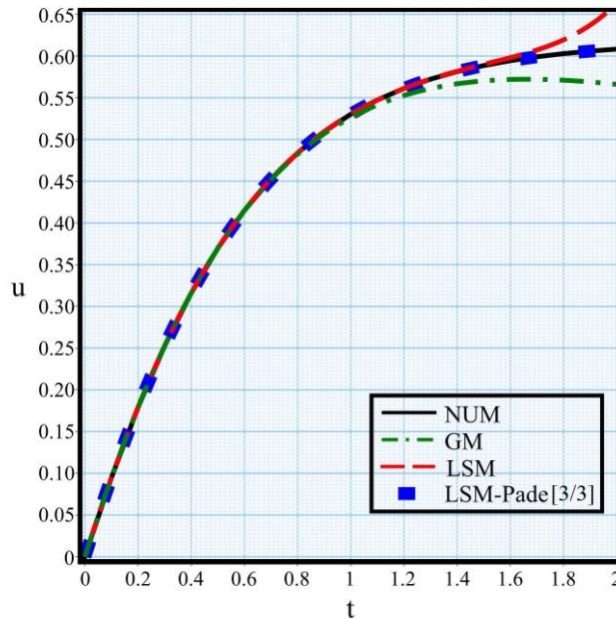


Figure 2. Comparison between LSM, LSM-Padé, GM and numerical methods for $a = b = c = d = 1$

Fig. 4 depicts the variations of velocity for aluminium, copper and lead for different diameters, respectively. As seen, the velocity enhances by the increase in the particle diameter. In order to better compare the results, the variation of velocity and acceleration with time for different type of particles and the diameter equal to 1mm is depicted in fig 5. As seen the velocity and acceleration of lead particle is highest which is followed by copper and finally aluminium. Fig. 6 represents the position of the particle as well as particle size in sedimentation process for each time step equal to 0.02 s. For all selected particles, terminal velocity is calculated and presented in Table 3. Results also are compared with HPM [13] and DTM-Padé [27]. It can be concluded from Table 3 that LSM-Padé [3,3] estimated the terminal velocity with the acceptable exactness. The results show that the speed values depend on the diameter and density of the particles. Thus, the acceleration period of the smaller particles is shorter. It can be deduced that when the particle is heavier, due to the higher speed has lower positions in the same time step.

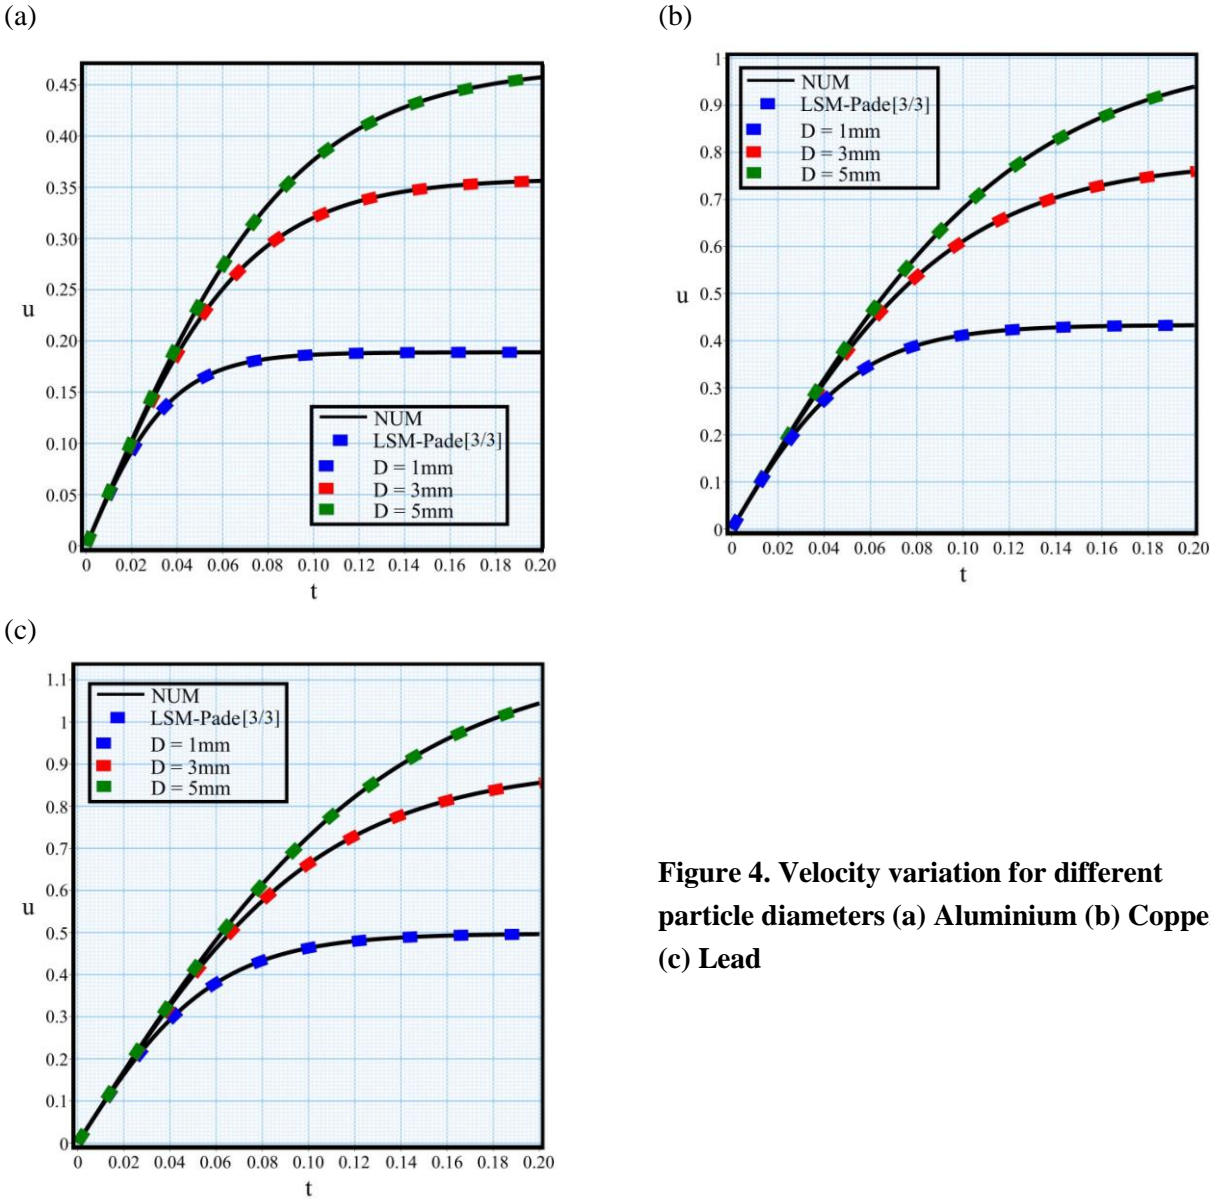


Figure 4. Velocity variation for different particle diameters (a) Aluminium (b) Copper (c) Lead

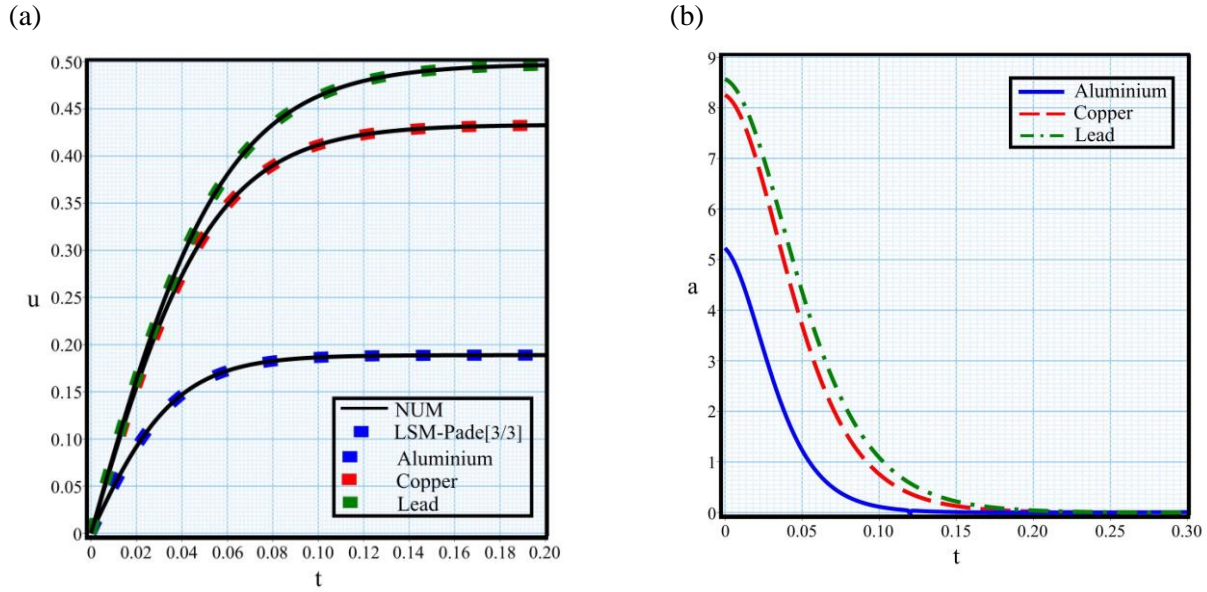


Figure 5. Comparison of (a) velocity and (b) acceleration for different particle materials ($D = 1$ mm).

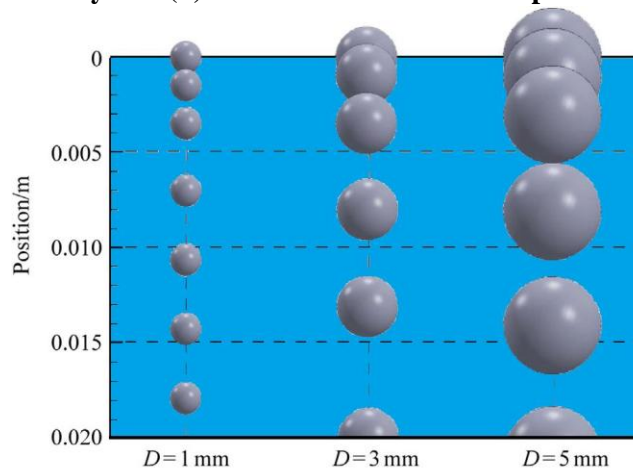


Figure 6. Positions of particles for different size of Aluminum particles, time interval = 0.02 s [26]

Table 4. Terminal velocity (m/s) for particles calculated by LSM-Padé, HPM [13], DTM-Padé [27] and numerical method.

Particle material	Diameter (mm)	Numerical method	LSM-Padé [3,3]	DTM-Padé [8,8]	HPM
Aluminum	1	0.1888759074	0.1888764091	0.1771953458	0.1888743212
	3	0.3585504311	0.3585529684	0.3581483507	0.3585425621
	5	0.4683308257	0.4682026356	0.4682662708	0.4683267958
Copper	1	0.4332008767	0.4332064180	0.4336398188	0.4332014752
	3	0.7829089418	0.7828744656	0.7828929076	0.7828921531
	5	1.0156731422	1.0156759824	1.015681926	1.0156721043
Lead	1	0.4975607949	0.4973452171	0.4837738933	0.4965829147
	3	0.8944267047	0.8944235623	0.8944040156	0.8944159856
	5	1.1589079584	1.1590815413	1.158902486	1.1589059863

5. Conclusion

In this study, Least Square Method with Padé approximation is applied to solve the problem of the unsteady settling behavior of solid spherical particles falling in water as a Newtonian fluid. The analytical models were presented for particles sedimentation and different particle materials (Aluminum, Copper, and Lead). The following main conclusions can be drawn from the current study:

- The velocity and acceleration of lead particle is higher than copper and aluminium.
- The lower positions in the same time step are observed for the heavier particle.
- The results of LSM with Padé approximation are in excellent agreement with the numerical data.

Nomenclature

a, b, c	– Constants, [–]	t	– Time [s]
C_D	– Drag Coefficient, [–]	u	– Velocity, [ms^{-1}]
D	– Particle Diameter, [m]	W_i	– Weight Function, [–]
$f(\eta)$	– Analytic Function, [m]	$x(t)$	– Analytic function, [m^2s^{-1}]
g	– Gravity, [ms^{-2}]	ρ	– Density, [kgm^{-3}]
H	– Constant Value, [–]	Greek symbols	
m	– Particle Mass, [kg]	μ	– Dynamic Viscosity [kgms^{-1}]
P	– Padé approximation, [–]	ρ	– Density [kgm^{-3}]
$R(x)$	– Residual Function, [–]	ρ_s	– Particle Density [kgm^{-3}]
Re	– Reynolds number, [–]		

References

- [1] J.S. Bridge, S.J. Bennett, A model for the entrainment and transport of sediment grains of mixed sizes, shapes, and densities, *Water Resources Research*, 28(2)(1992)337–363.
- [2] N.S.Cheng, Simplified settling velocity formula for sediment particle, *Journal of Hydraulic Engineering*, 123(1997)149–152.
- [3] R. Clift, J.R. Grace, M.E. Weber, *Bubbles, Drops and Particles*, Academic Press, New York, 1978.
- [4] R.P. Chhabra, *Bubbles, Drops and Particles in Non-Newtonian Fluids*, CRC Press, Boca Raton, FL, 1993.
- [5] A. Haider, O.Levenspiel, Drag coefficients and terminal velocity of spherical and non-spherical particles, *Powder Technology*, 58(1989)63–70.
- [6] J. Guo, Motion of spheres falling through fluids, *Journal of Hydraulic Research*, 49(1) (2011)32–41.
- [7] P. Mohazzabi, Falling and rising in a fluid with both linear and quadratic drag, *Canadian Journal of Physics*, 88(9) (2010) 623–626.
- [8] D.D. Ganji, A semi-analytical technique for non-linear settling particle equation of motion, *Journal of Hydro- environment Research*, 6(4) (2012)323–327.
- [9] H. Yaghoobi, M. Torabi, Analytical solution for settling of non-spherical particles in incompressible Newtonian media, *Powder Technology*, 221(2012)453–463.
- [10] H. Yaghoobi, M. Torabi, Novel solution for acceleration motion of a vertically falling non-spherical particle by VIM-Padé approximant, *Powder Technology*, 215-216 (2012) 206–209.
- [11] S.T. Mohyud-Din, M.A. Noor, K.I. Noor, M.M. Hosseini, Solution of singular equations by He's variational iteration method, *International Journal of Nonlinear Sciences & Numerical Simulation*, 11(2)(2010)81–86.

- [12] M. Jalaal, H. Bararnia, G. Domairry, A series exact solution for one-dimensional non-linear particle equation of motion, *Powder Technology*, 207(2011)461–464.
- [13] M. Jalaal, D.D. Ganji, G. Ahmadi, Analytical investigation on acceleration motion of a vertically falling spherical particle in incompressible Newtonian media, *Advanced Powder Technology*, 21(3)(2010)298–304.
- [14] J.H. He, Homotopy perturbation method with an auxiliary term, *Abstract and Applied Analysis*, Volume 2012 (2012), Article ID 857612, 7 pages, <http://dx.doi.org/10.1155/2012/8576>.
- [15] J.H. He, An elementary introduction of recently developed asymptotic methods and nanomechanics in textile engineering, *International Journal of Modern PhysicsB*, 22(21) (2008) 3487–4578.
- [16] S.T. Mohyud-Din, M.A. Noor, K.I. Noor, Some relatively new techniques for nonlinear problems, *Mathematical Problems in Engineering*, Volume 2009 (2009), Article ID 234849, 25 pages, <http://dx.doi.org/10.1155/2009/234849>.
- [17] S.T. Mohyud-Din, A. Yildirim, G. Demirli, Analytical solution of wave system in R_n with coupling controllers, *International Journal of Numerical Methods for Heat & Fluid Flow*, 21(2)(2011)198–205.
- [18] B. Raftari, S.T. Mohyud-Din, A. Yildirim, Solution to the MHD flow over nonlinear stretching sheeting by homotopy perturbation method, *Science in China Series G: Physics, Mechanics and Astronomy*, 54(2) (2011)342–345, <http://dx.doi.org/10.1007/s11433-010-4180-1>.
- [19] M. Torabi, H. Yaghoobi, Novel solution for acceleration motion of a vertically falling spherical particle by HPM-Padé approximant, *Advanced Powder Technology*, 22(6) (2011)674–677.
- [20] M. Jalaal, D.D. Ganji, An analytical study on motion of a sphere rolling down an inclined plane submerged in a Newtonian fluid, *Powder Technology*, 198(1) (2010)82–92.
- [21] M. Jalaal, D.D. Ganji, On unsteady rolling motion of spheres in inclined tubes filled with incompressible Newtonian fluids, *Advanced Powder Technology*, 22(1) (2011)58–67.
- [22] M.N. Ozisik, *Heat Conduction*, second edition John Wiley & Sons Inc, USA, 1993.
- [23] R.H. Stern, H. Rasmussen, *Comput. Biol. Med.* 26 (1996) 255–261.
- [24] B. Vaferi, V. Salimi, D. Dehghan Baniani, A. Jahanmiri, S. Khedri, feasibility of applying of Orthogonal Collocation method to solve diffusivity equation in the radial transient flow system, *J. Pet. Sci. Eng.* (2012), <http://dx.doi.org/10.1016/j.petrol.2012.04.023>.
- [25] M. Hatami, A. Hasanpour, D.D. Ganji, heat transfer study through porous fins (Si_3N_4 and AL) with temperature-dependent with heat generation, *Energy Convers. Manag.* 74 (2013) 9–16.
- [26] R. Nouri, D.D. Ganji, M. Hatami, Unsteady sedimentation analysis of spherical particles in Newtonian fluid media using analytical methods, *Propulsion and Power Research*, 3(2) (2014), 96–105.
- [27] M. Hatami, D.D. Ganji, Transient vertically motion of a soluble particle in a Newtonian fluid media, *Powder Technology*, 253(2014) 481-485.
- [28] M. Hatami, D.D. Ganji, Motion of a spherical particle on a rotating parabola using Lagrangian and high accuracy Multi-step Differential Transformation Method, *Powder Technology*, 258 (2014) 94-98.
- [29] M. Hatami, D.D. Ganji, Motion of a spherical particle in a fluid forced vortex by DQM and DTM, *Particuology*, 16 (2014) 206-212.
- [30] M.M. Rashidi, H. Shahmohamadi, S. Dinarvand, Analytic approximate solutions for unsteady two-dimensional and axisymmetric squeezing flows between parallel plates, *Mathematical Problems in Engineering*, 2008 (2008), 1-13.
- [31] O. Anwarbeg, M. M. Rashidi, T. A. Beg, M. Asadi, Homotopy analysis of transient magneto-bio-fluid dynamics of micropolar squeeze film in a porous medium: A model for magneto-bio-rheological lubrication, *Journal of Mechanics in Medicine and Biology*, 12 (03) (2012) 1-21.
- [32] M.M. Rashidi, E. Erfani, Analytical Method for Solving Steady MHD Convective and Slip Flow due to a Rotating Disk with Viscous Dissipation and Ohmic Heating, *Engineering Computations*, 29 (6) (2012) 562–579.
- [33] A. Basiri Parsa, M.M. Rashidi, O. Anwar Bég, S.M. Sadri, Semi-computational simulation of magneto-hemodynamic flow in a semi-porous channel using optimal homotopy and differential transform methods, *Computers in Biology and Medicine*, 43 (9) (2013) 1142–1153.

- [34] M. Sheikholeslami, M. Hatami, D.D. Ganji, Analytical investigation of MHD nanofluid flow in a semi-porous channel, *Powder Technology*, 246 (2013) 327–336.
- [35] B. Takabi, H. Shokouhmand, Effects of Al_2O_3 -Cu/water hybrid nanofluid on heat transfer and flow characteristics in turbulent regime, *International Journal of Modern Physics C*,. 26 (4) (2015) 1550047.
- [36] B. Takabi, S. Salehi, Augmentation of the Heat Transfer Performance of a Sinusoidal Corrugated Enclosure by Employing Hybrid Nanofluid, *Advances in Mechanical Engineering*, 6 (2014) 147059.
- [37] M.M. Rashidi, M. Nasiri, M. Khezerloo, N. Laraqi, Numerical investigation of magnetic field effect on mixed convection heat transfer of nanofluid in a channel with sinusoidal walls, *Journal of Magnetism and Magnetic Materials*, 401 (2016) 159-168.
- [38] H. Shahmohamadi, M.M. Rashidi, VIM solution of squeezing MHD nanofluid flow in a rotating channel with lower stretching porous surface, *Advanced Powder Technology*, 27 (1) (2016) 171-178.