

## NUMERICAL STUDY OF UNSTEADY AXISYMMETRIC FLOW AND HEAT TRANSFER IN CARREAU FLUID PAST A STRETCHED SURFACE

by

**Masood KHAN<sup>a</sup>, Muhammad AZAM<sup>a\*</sup>, and Ali Saleh ALSHOMRAN<sup>b</sup>**

<sup>a</sup>Department of Mathematics, Quaid-i-Azam University, Islamabad, Pakistan

<sup>b</sup>Department of Mathematics, Faculty of Science, King Abdulaziz University, Jeddah, Saudi Arabia

Original scientific paper

<https://doi.org/10.2298/TSCI160807132K>

*In this paper, we present the numerical results for the unsteady axisymmetric flow and heat transfer of Carreau fluid induced by time dependent permeable radially stretching surface. Numerical results are demonstrated for both shear thinning and shear thickening fluids. The time dependent non-linear PDE of the considered problem are reduced into non-linear ODE with the aid of suitable transformations. An effective numerical technique namely bvp4c function in MATLAB is employed to construct the numerical solutions of the transformed non-linear ODE for the velocity and temperature fields. Numerical computations of the local skin-friction coefficient and local Nusselt number are tabulated for steady and unsteady flows of shear thinning fluid as well as shear thickening fluid. It is worth mentioning that the magnitude of the skin friction coefficient and local Nusselt number for the steady flow is less than that for unsteady flow.*

Key words: *unsteady axisymmetric flow, Carreau fluid, heat transfer, numerical solutions*

### Introduction

It is renowned fact that the study involving stretching surface flow is a subject of great interest for researchers due to its vast practical applications in industrial and manufacturing processes. These applications include design of extrusion of sheet materials, glass blowing, paper production, annealing of copper wires, purification of crude oil and so forth. The kinematics of stretching and simultaneously cooling/heating have great impact on the quality of final production which depends on the rate of heat transfer from the surface. Sakiadis [1] seems to be the first amongst the researchers to initiate the work on boundary-layer flow over a solid surface and modeled boundary-layer equations of 2-D axisymmetric flow. A large number of investigations have been made by the authors on this problem from different point of view. However, a literature survey reveals that less attention has been paid regarding the axisymmetric flows induced by radially stretching surface. Ariel [2] studied the problem of axisymmetric flow induced by a radially stretching surface and computed the exact, numerical, perturbation, and asymptotic solutions of the problem. Again, Ariel [3] reported the impact of the partial slip on axisymmetric flow past a radially stretching sheet and found the exact and numerical solutions. Martins *et al.* [4]

\* Corresponding author, e-mail: mazam\_25@yahoo.com

examined the influence of inertia and shear thinning on the axisymmetric flows of Carreau fluid by means of Galerkin least square method and they compared their numerical results with the existing literature and found to be in excellent agreement. Rashidi *et al.* [5] carried out the analytical and numerical studies of transient 2-D and axisymmetric squeezing flows. Sajid *et al.* [6] studied the problem of unsteady axisymmetric flow past a radially stretching surface and computed the series solutions by employing the homotopy analysis method. Sahoo [7] analyzed the impact of partial slip on axisymmetric flow of viscoelastic fluid over a radially stretched surface by using the finite difference method and obtained by Broyden's method. He also compared obtained numerical solutions with the solutions of Ariel [2] and found to be in outstanding agreement.

On the other hand, the study of non-Newtonian fluids is of paramount relevance in many fields of engineering and industrial applications. These fluids are encountered in many practical applications such as plastic sheet formation, paper production, oil recovery, petroleum drilling glass blowing, and food processing. Newton's law of viscosity does not hold for such class of fluids and their rheological characteristics cannot be discussed in a comprehensive way by one constitutive relationship and they have non-linear relationship between the shear stress and shear rate. The generalized Newtonian fluids are those in which viscosity of the fluid depends on the shear rate. The power-law, Bingham, Sisko, Cross, Ellis, and Carreau models are the generalized Newtonian fluids. Carreau model is an important class of generalized Newtonian fluids proposed by Carreau [8]. Different simulations involving the flow of Carreau fluid have been made by the authors around spheres, stretching sheet, cylinder, pipes, cavities, and channels. This model possesses the ability of characterizing the rheology of different polymeric solutions such as 1% methylcellulose lylose in glycerol solution. The study of axisymmetric flow of Sisko fluid over a radially stretched surface was carried out by Khan and Shahzad [9]. They obtained the series solution of the considered problem by using analytical technique namely, homotopy analysis method. Additionally, they computed the exact solutions in special cases for the power law index  $n = 0$  and  $n = 1$ . Makinde *et al.* [10] analyzed the impact of variable viscosity and thermal radiation on nanofluid flow over a stretched surface in the presence of convective boundary condition. They noticed that the heat transfer rate depreciates with nanofluids and viscosity parameters. Pantokratoras [11] conducted the comparative study of Blasius and Sakiadis flows of Carreau fluid. Fetecau *et al.* [12] presented the exact solutions for unidirectional flow of rate type fluids. Khan *et al.* [13] demonstrated a numerical study to examine the melting heat transfer in Carreau nanofluid flow over a wedge in the presence of heat generation/absorption. They observed that temperature and nanoparticles concentration profiles reduce for improving values of melting parameters. Singh and Makinde [14] considered the problem of mixed convection flow over a moving plate in the presence of partial slip. Recently, Ahmad *et al.* [15] carried out the analytical and numerical study of unsteady axisymmetric flow of power law fluid over a radially stretching surface. They found that both the analytical and numerical results are in good agreement. The study of stagnation point flow over a radially stretching heated surface was conducted by Shateyi and Makinde [16]. They noticed that the heat transfer rate increases for increasing values of Biot number. Vieru *et al.* [17] examined the effects of Newtonian heating and mass diffusion on free convection flow near the vertical plate. Makinde [18] presented computational modelling for nanofluid flow over an unsteady stretching surface in the presence of convective condition. The study of heat and mass transfer analysis in nanofluid flow over a convectively heated surface was conducted by Khan *et al.* [19]. They noted that suction depreciates the thermal and concentration boundary-layer thickness. Recently, Khan and Azam [20] conducted a numerical study to examine the heat and mass transfer

rates in Carreau nanofluid flow in the presence of magnetic field. They concluded that the local Nusselt and Sherwood numbers are decreasing functions of the thermophoresis parameters.

Motivated by the literature and applications, the main theme of the current investigation is the numerical study of unsteady axisymmetric boundary-layer flow and heat transfer characteristics of Carreau fluid induced by time dependent radially stretching surface. The non-linear time dependent PDE regarding Carreau rheological model are reduced to non-linear ODE by employing the suitable local similarity transformations. Then `bvp4c` routine in MATLAB is adopted to construct the numerical solutions of the considered problem.

### Mathematical formulation

Let us consider the unsteady axisymmetric 2-D flow of an incompressible Carreau fluid induced by a time dependent permeable radially stretching sheet which is stretched in the radial direction with stretching velocity,  $U_w$ , proportional to the distance,  $r$ , from the origin. The sheet is coinciding with the plane  $z = 0$  and the flow occurs in the upper half plane  $z > 0$ . For mathematical description, we consider the cylindrical polar co-ordinate system  $(r, \theta, z)$ . In view of the rotational symmetry, all the physical quantities are independent of  $\theta$ . Therefore, the azimuthal component of velocity vanishes. It is also assumed that the temperature of the sheet is  $T_w(r, t)$  and considered to be higher than the ambient temperature  $T_\infty (T_w > T_\infty)$ .

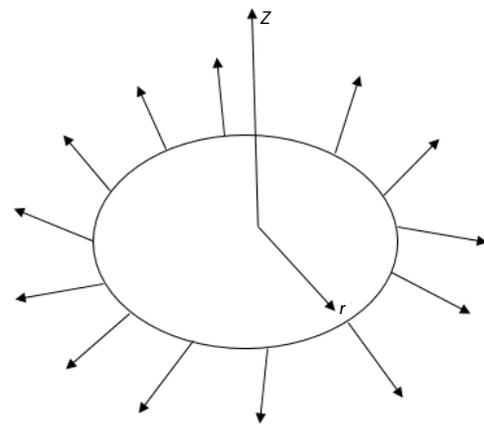


Figure 1. Geometry of the problem

The constitutive equation for a Carreau model is given by [21]:

$$\mu = \mu_\infty + (\mu_0 - \mu_\infty) \left[ 1 + (\Gamma \dot{\gamma})^2 \right]^{\frac{n-1}{2}} \quad (1)$$

where  $\mu$  is the apparent viscosity,  $\mu_0$  and  $\mu_\infty$  are the zero shear and infinite shear rate viscosities, respectively,  $n$  is the power law index which corresponds to shear thinning for  $(0 < n < 1)$ , shear thickening for  $(n > 1)$ , and Newtonian for  $n = 1$ ,  $\Gamma = 0$  – the material time constant also known as the relaxation time, and  $\dot{\gamma}$  – the rate of strain tensor. In the current formulation, we assumed that  $\mu_\infty = 0$ . Thus, the constitutive equation takes the form:

$$\mu = \mu_0 \left[ 1 + (\Gamma \dot{\gamma})^2 \right]^{\frac{n-1}{2}} \quad (2)$$

The velocity and temperature fields for the unsteady 2-D axisymmetric flow are assumed to be of the form:

$$V = [u(r, z, t), 0, w(r, z, t)], \quad T = T(r, z, t) \quad (3)$$

Under the aforesaid assumptions, the governing boundary-layer equations for the axisymmetric unsteady flow along with the boundary conditions take the form:

$$\frac{\partial u}{\partial r} + \frac{u}{r} + \frac{\partial w}{\partial z} = 0 \quad (4)$$

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial r} + w \frac{\partial u}{\partial z} = \nu \frac{\partial^2 u}{\partial z^2} \left[ 1 + \Gamma^2 \left( \frac{\partial u}{\partial z} \right)^2 \right]^{\frac{n-1}{2}} + \nu(n-1)\Gamma^2 \frac{\partial^2 u}{\partial z^2} \left( \frac{\partial u}{\partial z} \right)^2 \left[ 1 + \Gamma^2 \left( \frac{\partial u}{\partial z} \right)^2 \right]^{\frac{n-3}{2}} \quad (5)$$

$$\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial r} + w \frac{\partial T}{\partial z} = \frac{k}{\rho c_p} \frac{\partial^2 T}{\partial z^2} + \frac{\mu_0}{\rho c_p} \left( \frac{\partial u}{\partial z} \right)^2 \left[ 1 + \Gamma^2 \left( \frac{\partial u}{\partial z} \right)^2 \right]^{\frac{n-1}{2}} \quad (6)$$

$$u = U_w(r, t), \quad w = f_w(t), \quad T = T_w(r, t) \quad \text{at} \quad z = 0 \quad (7)$$

$$u \rightarrow 0, \quad T \rightarrow T_\infty \quad \text{as} \quad z \rightarrow \infty \quad (8)$$

where  $u$  and  $w$  denote the velocity components along  $r$ - and  $z$ -directions, respectively,  $t$ ,  $\nu$ ,  $\rho$ ,  $k$ ,  $c_p$  are the time, kinematic viscosity, fluid density, thermal conductivity of the fluid, and the specific heat, respectively.

We assumed that the stretching velocity  $U_w(r, t)$  surface temperature  $T_w(r, t)$  and mass fluid velocity  $f_w(t)$  are of the following form:

$$U_w(r, t) = \frac{cr}{1-\alpha t}, \quad T_w(r, t) = T_\infty + \frac{br}{1-\alpha t}, \quad f_w(t) = \frac{-W_0}{\sqrt{1-\alpha t}} \quad (9)$$

where  $\alpha t < 1$  with positive constants  $\alpha$  and  $c$  having dimensions reciprocal of time,  $W_0$  is a uniform suction/injection velocity ( $W_0 > 0$ ) for suction and  $W_0 < 0$  for injection).

The particular form for the mass fluid velocity,  $f_w(t)$ , surface temperature and stretching velocity,  $U_w(r, t)$ , are chosen to employ the following suitable transformation:

$$\eta = \frac{z}{r} \sqrt{\text{Re}}, \quad \Psi(r, z, t) = -r^2 U_w \frac{1}{\sqrt{\text{Re}}} f(\eta), \quad \theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \quad (10)$$

where  $\Psi$  is the Stokes stream function having the property  $u = -(1/r)(\partial \Psi / \partial z)$ ,  $w = (1/r)(\partial \Psi / \partial r)$ ,  $\theta$  – the dimensionless temperature,  $\text{Re} = rU_w/\nu$  – the local Reynolds number and  $\eta$  the independent variable, respectively. Thus the velocity components are:

$$u = U_w f'(\eta), \quad w = -2U_w \frac{1}{\sqrt{\text{Re}}} f(\eta) \quad (11)$$

In view of the previous transformations, the governing eqs. (5) and (6) along with the boundary conditions (7) and (8) are reduced to the following non-dimensional form:

$$\left[ 1 + n \text{We}^2 (f'')^2 \right] \left[ 1 + \text{We}^2 (f'')^2 \right]^{\frac{n-3}{2}} f''' + 2ff'' - (f')^2 - A \left( f' + \frac{\eta}{2} f'' \right) = 0 \quad (12)$$

$$\theta'' + \text{Pr}(2f\theta' - f'\theta) - \text{Pr} \frac{A}{2} (\eta\theta' + 2\theta) + \text{Ec} \text{Pr} (f'')^2 \left[ 1 + \text{We}^2 (f'')^2 \right]^{\frac{n-1}{2}} = 0 \quad (13)$$

$$f(0) = S, \quad f'(0) = 1, \quad \theta(0) = 1 \quad (14)$$

$$f'(\infty) \rightarrow 0, \quad \theta(\infty) \rightarrow 0 \quad (15)$$

where prime denotes differentiation with respect to  $\eta$ ,  $\text{We} = [c^3 \Gamma^2 r^2 / \nu (1-\alpha t)^3]^{1/2}$  is the local Weissenberg number,  $\text{Pr} = \mu c_p / k$  – the Prandtl number,  $A = \alpha / c$  – the dimensionless parameter which measures the unsteadiness and  $S = W_0 / 2(\nu c)^{1/2}$  – the constant mass transfer parameter with  $S > 0$  for suction and  $S < 0$  for injection and  $\text{Ec} = c U_w / b C_p$  – the Eckert number.

The physical quantities of prime engineering interest are the local skin friction coefficient,  $C_f$ , and the local Nusselt number which are given:

$$C_f = \frac{\tau_w}{\rho U_w^2}, \quad \text{Nu} = \frac{r q_w}{k(T_w - T_\infty)} \quad (16)$$

where  $\tau_w$  and  $q_w$  are the wall shear stress and wall heat flux, respectively, having the following expressions:

$$\tau_w = \mu_0 \frac{\partial u}{\partial z} \left[ 1 + \Gamma^2 \left( \frac{\partial u}{\partial z} \right)^2 \right]^{\frac{n-1}{2}}, \quad q_w = -k \left( \frac{\partial T}{\partial z} \right)_{z=0} \quad (17)$$

Consequently, in view of eqs. (10) and (16), eq. (17) takes the dimensionless form:

$$\sqrt{\text{Re}} C_f = f''(0) \left\{ 1 + \text{We}^2 [f''(0)]^2 \right\}^{\frac{n-1}{2}}, \quad \frac{1}{\sqrt{\text{Re}}} \text{Nu} = -\theta'(0) \quad (18)$$

### Numerical procedure

The current numerical computations for solving the boundary value problem usually require a guess for the solution. Boundary value problems are much difficult to handle than initial value problems and any solver may fail even with good guesses. The `bvp4c` function is an effective solver of the boundary value problems which employs a collection method for determining the solution of boundary value problems of the form  $y' = f(x, y, \mathbf{p})$ ,  $a \leq x \leq b$  with boundary conditions  $g[y(a), y(b), \mathbf{p}] = 0$  where  $\mathbf{p}$  denotes a vector of unknown parameters. The transformed non-linear ODE (12) and (13) along with boundary conditions (14) and (15) are solved numerically by employing the MATLAB boundary value problems solver `bvp4c` function. For this, we convert the given ODE as a system of first order ODE. As a result, the non-linear ODE (12) and (13) are reduced to a system of first order ODE:

$$f = u_1, \quad f' = u_2, \quad f'' = u_3, \quad f''' = \frac{A \left( u_2 + \frac{\eta}{2} u_3 \right) + u_2^2 - 2u_1 u_3}{(1 + n \text{We}^2 u_3^2)(1 + \text{We}^2 u_3^2)^{\frac{n-3}{2}}} \quad (19)$$

$$\theta = u_4, \quad \theta' = u_5, \quad \theta'' = \text{Pr} \frac{A}{2} (\eta u_5 + 2u_4) - \text{Pr} (2u_1 u_5 - u_2 u_4) - \text{Pr} \text{Ec} \text{We}^2 u_3^2 [1 + \text{We}^2 u_3^2]^{\frac{n-1}{2}} \quad (20)$$

A comprehensive discussion of this method is explained in [22].

### Results and discussion

The main focus of present investigation is the study of the unsteady axisymmetric boundary-layer flow and heat transfer characteristics of Carreau fluid over a permeable time dependent radially stretching sheet. The system of non-linear ODE (10) and (11) subject to the boundary conditions (12) and (13) are solved numerically by an effective numerical technique namely `bvp4c` function in MATLAB. The comprehensive numerical results are computed for different values of the physical pertinent parameters of flow and heat transfer namely, unsteadiness parameter,  $A$ , power law index,  $n$ , Prandtl number, local Weissenberg number ( $\text{We}$ ), mass transfer parameter,  $S$ , and Eckert number. The influence of these physical parameters on the velocity and temperature fields is depicted graphically with comprehensive discussions. The variations of the local skin-friction coefficient  $\text{Re}^{1/2} C_f$  and the local Nusselt number  $\text{Re}^{-1/2} \text{Nu}$  are illustrated in tabular form through tabs. 1 and 2 for various values of the pertinent parameters for both shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids in the steady ( $A = 0$ ) and unsteady ( $A \neq 0$ ) flows. Note that the transformations in eq. (10) give rise to some physical parameters which are not independent from spatial/temporal variables. It means that the present model is only a local approximation.

Table 1 shows that the magnitude of local skin friction coefficient is an increasing function of the mass transfer parameter,  $S$ , in shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids for both the cases of steady flow ( $A = 0$ ) as well as unsteady flow ( $A \neq 0$ ). It is

**Table 1. Numerical computations of the local skin friction  $Re^{1/2} C_f$  for selected values of  $A$ ,  $S$ ,  $We$ , and  $n$** 

Re <sup>1/2</sup>					
Parameters		A = 0 (steady flow)		A = 0.2 (unsteady flow)	
S	We	n = 0.5	n = 1.5	n = 0.5	n = 1.5
0.2	2.0	-1.119129	-1.614836	-1.152785	-1.676683
0.4	–	-1.347501	-1.890583	-1.377471	-1.948162
0.6	–	-1.613982	-2.186952	-1.640031	-2.240451
0.8	–	-1.913899	-2.500332	-1.936121	-2.550076
0.2	2.0	-1.119129	-1.614836	-1.152785	-1.676683
–	4.0	-0.950219	-1.781116	-0.977609	-1.850448
–	6.0	-0.861721	-1.899110	-0.885892	-1.973780
–	8.0	-0.805068	-1.991355	-0.827130	-2.070245

**Table 2. Numerical computations of the local Nusselt number  $Re^{-1/2} Nu$  for selected values of  $Pr$ ,  $A$ ,  $S$ ,  $n$ , and  $We$** 

Re <sup>-1/2</sup> Nu							
Parameters				A = 0 (steady flow)		A = 0.2 (unsteady flow)	
Pr	S	We	Ec	n = 0.5	n = 1.5	n = 0.5	n = 1.5
0.72	0.2	2.0	0.2	0.92432	1.06309	0.97643	1.10823
1.0				1.18143	1.33451	1.23418	1.38254
3.0				2.59035	2.76978	2.65366	2.83765
10.0				6.10549	6.28025	6.19358	6.38878
0.72	0.2	2.0	0.2	0.92432	1.06309	0.97643	1.10823
	0.4			1.05781	1.22960	1.10687	1.27112
	0.6			1.21218	1.41117	1.25748	1.44913
	0.8			1.38707	1.60545	1.42834	1.64011
0.72	0.2	2.0	0.2	0.92432	1.06309	0.97643	1.10823
		4.0		0.85435	1.09335	0.91293	1.13618
		6.0		0.80908	1.11055	0.87282	1.15204
		8.0		0.77587	1.12190	0.84381	1.16254
0.72	0.2	2.0	0.0	1.00350	1.16080	1.05616	1.20581
			1.0	0.60761	0.67225	0.65748	0.71791
			2.0	0.21173	0.18371	0.25879	0.23000
			3.0	0.18416	-0.30484	-0.13989	-0.25790

also noticed that the magnitude of local skin friction coefficient diminishes by increasing the values of local Weissenberg number in shear thinning fluid both for steady and unsteady flows but opposite trend has been noticed in shear thickening fluid. Furthermore, the magnitude of skin friction coefficient  $|Re^{1/2} C_f|$  for the steady flow ( $A = 0$ ) is less than that for the unsteady flow ( $A \neq 0$ ). Table 2 indicates that the Prandtl number and mass transfer parameter,  $S$ , enhance the local Nusselt number  $Re^{-1/2} Nu$  in shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids for both the cases of steady flow ( $A = 0$ ) as well as unsteady flow ( $A \neq 0$ ). However, on

incrementing the values of the local Weissenberg number, the local Nusselt number  $Re^{-1/2}Nu$  diminishes in shear thinning fluid but enhances in shear thickening fluid for both the cases of steady flow ( $A = 0$ ) as well as unsteady flow ( $A \neq 0$ ). Additionally, it is noted that the local Nusselt number  $Re^{-1/2}Nu$  for the steady flow ( $A = 0$ ) is less than that for the unsteady ( $A \neq 0$ ) flow. It is also clear that the local Nusselt number is a decreasing function of the Eckert number.

Figures 2(a) and 2(b) depict the influence of unsteadiness parameter,  $A$ , on the velocity field,  $f'(\eta)$ , and temperature field,  $\theta(\eta)$ , for both the shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids. It is noted that the velocity  $f'(\eta)$  and temperature  $\theta(\eta)$  are diminishing functions of unsteadiness parameter,  $A$ , for both cases. It is further observed that rising values of the unsteadiness parameter,  $A$ , depreciate the momentum boundary-layer and thermal boundary-layer thicknesses for both the shear thinning and shear thickening fluids. Moreover, it is observed that the momentum boundary-layer thickness in case of shear thickening fluid is thicker in comparison with the shear thinning fluid. However, quite the opposite is true for the thermal boundary-layer thickness.

Figures 3(a) and 3(b) are reported to illustrate the influence of mass transfer parameter,  $S$ , on the velocity field  $f'(\eta)$  and the temperature field  $\theta(\eta)$  for both the shear thinning and shear thickening fluids. It is evident from these figures that an increase in the mass transfer

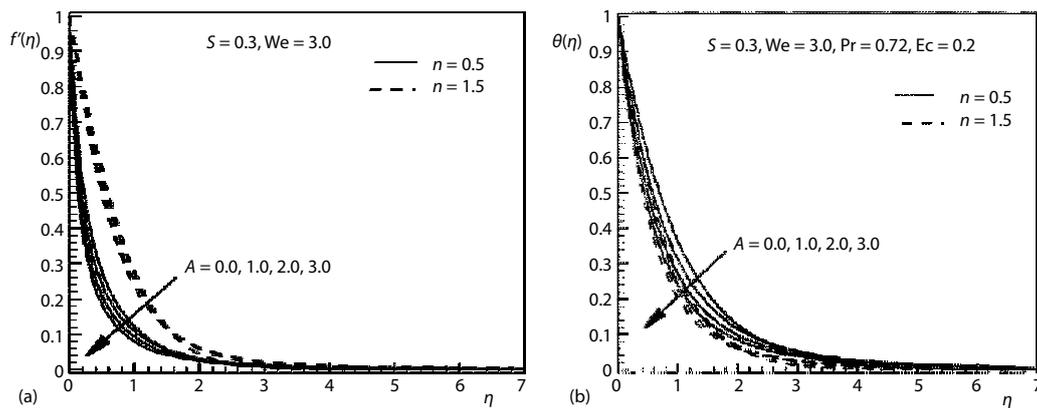


Figure 2. Effects of the unsteadiness parameter  $A$  on velocity  $f'(\eta)$  and temperature  $\theta(\eta)$  profiles

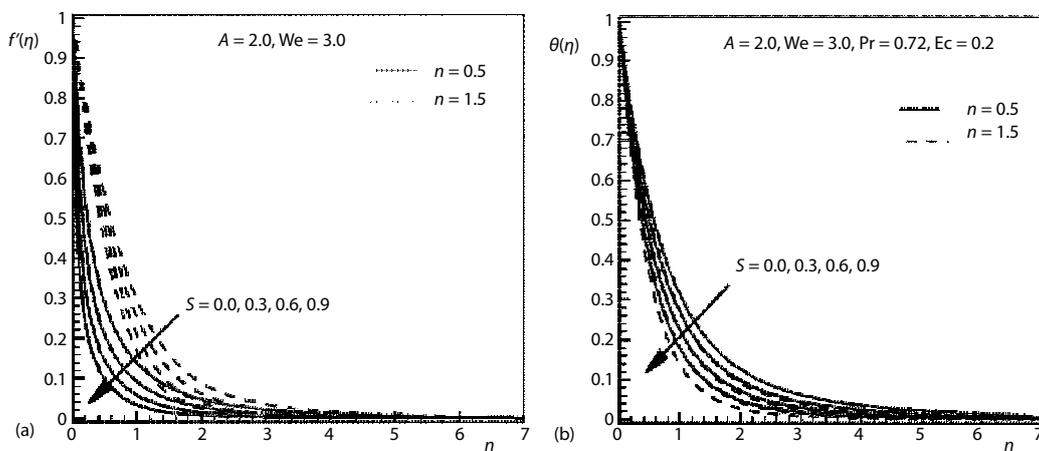


Figure 3. Effects of the mass transfer parameter  $S$  on velocity  $f'(\eta)$  and temperature  $\theta(\eta)$  profiles

parameter,  $S$ , corresponds a decrease in the velocity field  $f'(\eta)$  and temperature field  $\theta(\eta)$  in shear thinning and shear thickening fluids. However, the momentum boundary-layer and thermal boundary-layer thicknesses decrease by uplifting the mass transfer parameter,  $S$ , in shear thinning and shear thickening fluids. In fact, resistance took place to the fluid flow and fluid velocity due to the suction.

Figures 4(a) and 4(b) portray that the enhancement in the value of power law index,  $n$ , improves the velocity profiles  $f'(\eta)$  and depresses the temperature field  $\theta(\eta)$ . Physically, enhancement in the value of power law index  $n$  helps us to diminish the resistive force. It is also noticed that the momentum boundary-layer thickness increases for large values of power law index  $n$  and quite the opposite is true for the thermal boundary-layer thickness. The influence of the local Weissenberg number on the velocity field  $f'(\eta)$  and temperature field  $\theta(\eta)$  is demonstrated in figs. 5(a) and 5(b) for the case of shear thinning and shear thickening fluids.

From these figures, it can be seen that an elevation in the local Weissenberg number is to boost the velocity profiles  $f'(\eta)$  and temperature profiles  $\theta(\eta)$  in shear thinning fluid while a quite opposite effects are noticed for shear thickening fluid. Further, the local Weissenberg number has the tendency to enhance the momentum boundary-layer thickness in shear thinning fluid.

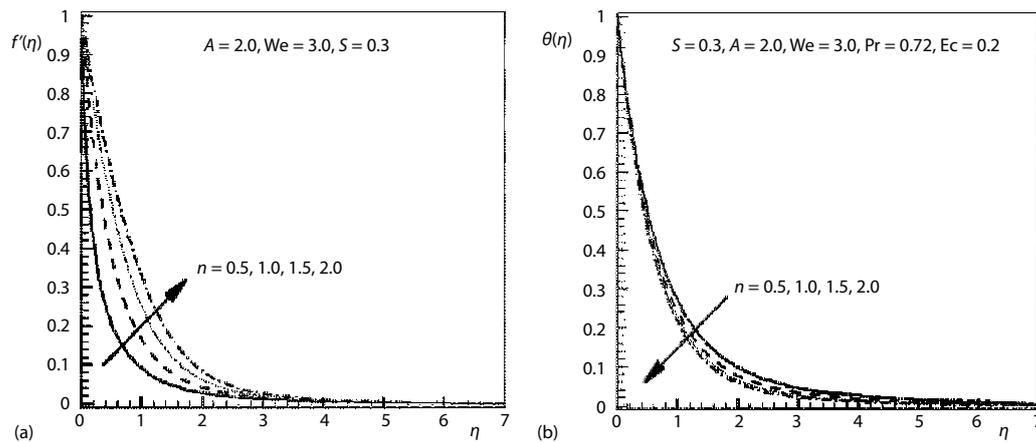


Figure 4. Effects of the power law index  $n$  on velocity  $f'(\eta)$  and temperature  $\theta(\eta)$  profiles

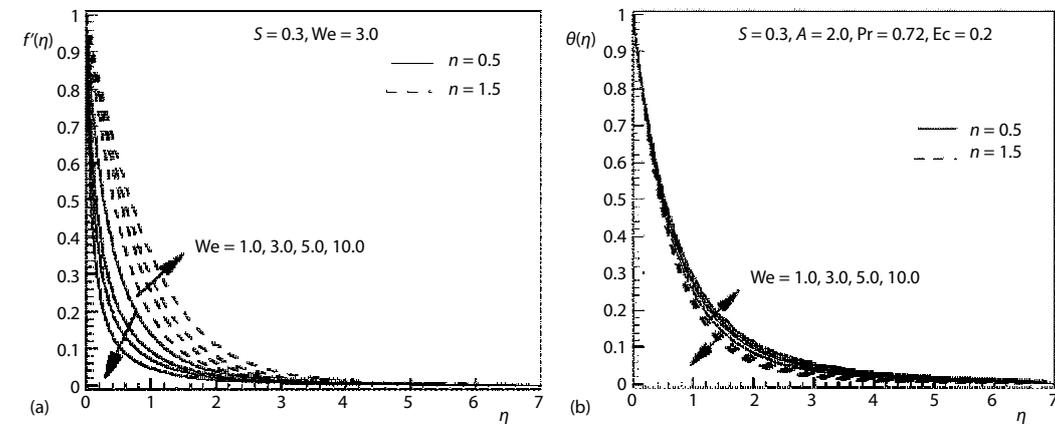


Figure 5. Effects of the Weissenberg number on velocity  $f'(\eta)$  and temperature  $\theta(\eta)$  profiles

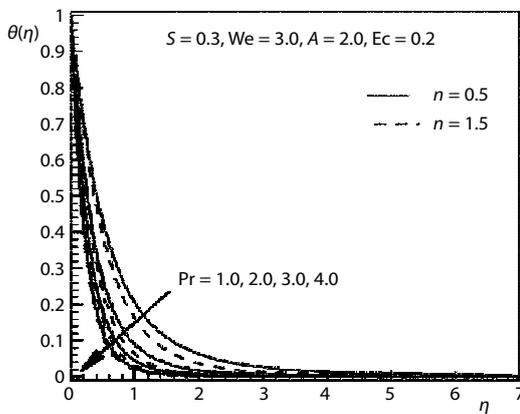


Figure 6. Effects of the Prandtl number on temperature  $\theta(\eta)$  profiles

Figure 6 reveals the impact of the Prandtl number on temperature profiles of the flow for the shear thinning and shear thickening fluids. From this figure, it is observed that inflation in the Prandtl number lowers the temperature profiles and thermal boundary-layer thickness for both the cases of shear thinning and shear thickening fluids. This is because of the fact that enhancement in the Prandtl number corresponds to low thermal conductivity and consequently diminishes the conduction and the thermal boundary-layer thickness.

Figure 7 represents the variation of temperature profiles for different values of Eckert number. From this figure, it can be seen that temperature is an enhancing function of the Eckert number.

Figure 8 indicates the flow pattern of stream lines which are symmetric everywhere.

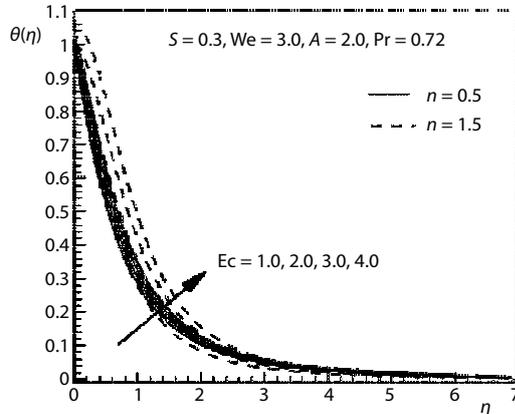


Figure 7. Effects of the Eckert number  $Ec$  on temperature  $\theta(\eta)$  profiles

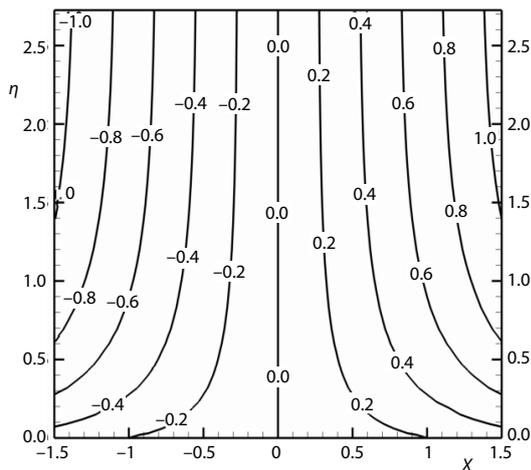


Figure 8. Stream lines

### Conclusions

In the present article, we constructed the numerical solutions for the problem of unsteady axisymmetric boundary-layer flow and heat transfer of Carreau fluid past a time dependent permeable radially stretching sheet by employing the MATLAB routine *bvp4c*. Numerical results were computed for both shear thinning and shear thickening fluids. The significance of pertinent parameters namely, the unsteadiness parameter,  $A$ , mass transfer parameter,  $S$ , power law index,  $n$ , local Weissenberg number,  $We$ , and Prandtl number was analyzed. The main observations of the present article are summarized as follows.

- The velocity profiles  $f'(\eta)$  and temperature profiles  $\theta(\eta)$  were diminished with an increment in the unsteadiness parameter and mass transfer parameter for both shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids.

- Enhancement in the unsteadiness parameter and the mass transfer parameter depreciated the momentum boundary-layer and thermal boundary-layer thicknesses for both shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids.
- Elevation in the local Weissenberg number was to boost up the velocity profiles  $f'(\eta)$  and momentum boundary-layer thickness for the shear thinning fluid while a quite opposite effects were noticed for shear thickening fluid.
- Larger values of the power law index,  $n$ , improved the velocity profiles  $f'(\eta)$  and momentum boundary-layer thickness but depressed the temperature profiles  $\theta(\eta)$ .
- The magnitude of local skin friction coefficient  $|\text{Re}^{1/2}C_f|$  was increasing function of the mass transfer parameter in shear thinning ( $0 < n < 1$ ) and shear thickening ( $n > 1$ ) fluids for both the cases of steady flow ( $A = 0$ ) as well as unsteady flow ( $A \neq 0$ ).
- The local Nusselt number  $\text{Re}^{-1/2}\text{Nu}$  and the magnitude of skin friction coefficient  $|\text{Re}^{1/2}C_f|$  for the steady flow ( $A = 0$ ) were less than that for the unsteady flow ( $A \neq 0$ ).

### Acknowledgment

The authors wish to convey their genuine thanks to the reviewers for their essential suggestions and comments to progress the superiority of this manuscript. The work of Dr. Alshomrani was partially supported by Deanship of Scientific Research (DSR), King Abdulaziz University, Jeddah, Saudi Arabia.

### References

- [1] Sakiadis, B. C., Boundary-Layer Behavior on Continuous Solid Surface: 1. Boundary-Layer Equations for Two-Dimensional and Axisymmetric Flow, *AIChE J.*, 7 (1961), Mar., pp. 26-28
- [2] Ariel, P. D., Axisymmetric Flow of a Second Grade Fluid Past a Stretching Sheet, *Int. J. Eng. Sci.*, 39 (2001), 5, pp. 529-553
- [3] Ariel, P. D., Axisymmetric Flow Due to a Stretching Sheet with Partial Slip, *Comput. Math. Appl.*, 54 (2007), 7-8, pp. 1169-1183
- [4] Martins, R. R., et al., Numerical Investigation of Inertia and Shear Thinning Effect in Axisymmetric Flows Carreau Fluids by a Galerkin Least Squares Method, *Lat. Amer. Appl. Res.*, 38 (2008), 4, pp. 321-328
- [5] Rashidi, M. M., et al., Analytic Approximate Solutions for Unsteady Two-Dimensional and Axisymmetric Squeezing Flows between Parallel Plates, *Math. Probl. Eng.*, 2008 (2008), ID935095
- [6] Sajid, M., et al., Series Solution for Unsteady Axisymmetric Flow and Heat Transfer over a Radially Stretching Sheet, *Commun. Non-Linear Sci. Numer. Simulat.*, 13 (2008), 10, pp. 2193-2202
- [7] Sahoo, B., Effects of Slip Viscous Dissipation and Joule Heating on the MHD Flow and Heat Transfer of a Second Grade Fluid Past a Radially Stretching Sheet, *Appl. Math. Mech. Engl. Ed.*, 31 (2010), 2, pp. 159-173
- [8] Carreau, P. J., Rheological Equations from Molecular Network Theories, *Trans. Soc. Rheol.*, 116 (1972), 1, pp. 99-127
- [9] Khan, M., Shahzad, A., On Axisymmetric Flow of Sisko Fluid over a Radially Stretching Sheet, *Int. J. Non-Linear Mech.*, 47 (2010), 9, pp. 999-1007
- [10] Makinde, O. D., et al., MHD Flow of a Variable Viscosity Nanofluid over a Radially Stretching Convective Surface with Radiative Heat, *Journal Mol. Liq.*, 219 (2016), July, pp. 624-630
- [11] Pantokratoras, A., Non-Similar Blasius and Sakiadis Flow of a non-Newtonian Carreau Fluid, *Journal Tai. Inst. Chem. Eng.*, 56 (2015), Nov., pp. 1-5
- [12] Fetecau, C., et al., New Methods to Provide Exact Solutions for Some Unidirectional Motions of Rate, Type Fluids, *Thermal Science*, 20 (2016), 1, pp. 7-20
- [13] Khan, M., et al., Effects of Melting and Heat Generation/Absorption on Unsteady Falkner-Skan Flow of Carreau Nanofluid over a Wedge, *Int. J. Heat Mass Transf.*, 110 (2017), July, pp. 437-446
- [14] Singh, G., Makinde, O. D., Mixed Convection Slip Flow with Temperature Jump along a Moving Plate in Presence of Free Stream, *Thermal Science*, 19 (2015), 1, pp. 119-128
- [15] Ahmad, J., et al., Axisymmetric Flow and Heat Transfer over an Unsteady Stretching Sheet in Power Law Fluid, *J. Mol. Liq.*, 221 (2016), Sept., pp. 386-393

- [16] Shateyi, S., Makinde, O. D., Hydromagnetic Stagnation-Point Flow Towards a Radially Stretching Convectively Heated Disk, *Hind. Pub. Corp. Math. Prob. Eng.*, 2013 (2013), ID616947
- [17] Vieru, D., *et al.*, Time-Fractional Free Convection Flow Near a Vertical Plate with Newtonian Heating and Mass Diffusion, *Thermal Science*, 19 (2015), 1, pp. 85-98
- [18] Makinde, O. D., Computational Modelling of Nanofluids Flow over a Convectively Heated Unsteady Stretching Sheet, *Current Nanoscience*, 9 (2013), 5, pp. 673-678
- [19] Khan, W. A., *et al.*, Combined Heat and Mass Transfer of Third-Grade Nanofluids over a Convectively-Heated Stretching Permeable Surface, *Canad. J. Chem. Eng.*, 93 (2015), 10, pp. 1880-1888
- [20] Khan, M., Azam, M., Unsteady Heat and Mass Transfer Mechanisms in MHD Carreau Nanofluid Flow, *Journal Mol. Liq.*, 225 (2017), Jan., pp. 554-562
- [21] Khan, M., Azam, M., Unsteady Boundary-Layer Flow of Carreau Fluid over a Permeable Stretching Surface, *Results Phys.*, 6 (2016), Nov., pp. 1168-1174
- [22] Shampine, L. F., *et al.*, Solving Boundary Value Problems for Ordinary Differential Equations in Matlab with `bvp4c`, [http://www.mathworks.com/bvp tutorial](http://www.mathworks.com/bvp_tutorial), 2000