

A COMPREHENSIVE STUDY ON THE EFFECT OF EMULSIFICATION, SOLID NANO ADDITIVE AND LPG DUAL FUEL OPERATION ON ENGINE BEHAVIOUR OF A WCO BASED COMPRESSION IGNITION ENGINE

*Sasikumar NANDHAGOPAL and Senthilkumar MASIMALAI**

Department of Automobile Engineering,
MIT Campus, Anna University, Chennai, India.

*Corresponding author; E-mail: msenthilkumar@annauniv.edu

The influence of emulsification, solid nano additive and LPG dual fuel operation on engine's performance, emission and combustion behaviour of a waste cooking oil (WCO) of sunflower oil based compression ignition engine was studied experimentally. Initially test engine was operated in single fuel mode with neat diesel (ND) and neat waste cooking oil (NWCO) as fuels at various loading conditions. In the second phase WCO was converted in to its emulsion (WCO-EM) and tested in the engine. The WCO emulsion was further modified into solid nano additive emulsion (WCO-NF-EM) and tested. Finally the engine was modified to operate in dual fuel mode and tested with LPG as the inducted fuel with WCO-NF-EM as pilot fuel. NWCO resulted in inferior engine operation with higher smoke, HC and CO emissions as compared to ND all power outputs. Significant improvement in BTE was noted with all the methods attempted. Dual fuel operation with WCO-NF-EM - LPG showed highest BTE which is very close to diesel value. Smoke and NOx emissions were considerably reduced with all the methods. Dual fuel mode with LPG induction showed the lowest smoke emission which was still lower than diesel value. WCO-EM and WCO-NF-EM further reduced the HC and CO emissions at all power outputs. It is concluded that the WCO can be effectively used in diesel engines by converting into its solid nano additive emulsion in the unmodified engine. Combining dual fuel operation with WCO-NF-EM- LPG could achieve the engine operation similar to diesel.

Keywords: *Diesel Engine, Waste cooking oil, nano additive, Emulsion, LPG, Dual fuel engine, Engine performance, Emission, Combustion.*

1. Introduction

Vegetable oils show most promising alternative fuel for diesel engine due to their favourable properties very close to diesel fuel [1,2]. Earlier studies have reported significant engine results with different vegetable oils as fuels [3-5]. However, the use of edible oils directly affects the consumer in cost and availability when used as engine fuel. In this regard used cooking oil looks very attractive to use as fuel for diesel engines. Past engine studies revealed that WCO could be used in diesel engines as fuel [6,7]. However international standards prevent the straight usage of such oils in a unmodified diesel engines. WCO could be used as fuel in diesel engines effectively with little modifications either in fuel or in engine side.

Transesterification is one of the widely used fuel modifications for converting neat WCO into its ester [8,9]. This process has the advantages of reduced viscosity, improved cetane number as compared to its neat oil. But complexity and cost factor makes the transesterification process as an unfavourable method. Emulsification process shows another option in using WCO effectively as fuel in diesel engines [10,11]. Earlier research studies reported simultaneous reduction of oxides of nitrogen and smoke emissions in diesel engines emulsified vegetable oils as fuel [10,11]. Hence modifying the WCO into its stable emulsion and using as fuel can achieve superior thermal efficiency and reduced smoke and NO_x emissions. Recent studies indicated involvement in nanotechnology in improving the engines performance using nano fluids as fuels and promising result outcomes were reported in recent times [12-14]. Nano fluids are the fluids dispersed with nano particle in the homogeneous liquids. Nano fluids find a wide range of applications in engine propulsion system, engine cooling system etc. due to its high thermal conductivity. Nano fluids are also used as fuel additives to enhance combustion behaviour of hydrocarbon fuels in engines. Researchers reported that the oxidation of metal content of nano fluid tends to produce more heat as compared to diesel and other fuel when used as an additive along with them. Experiments conducted with four different nano catalysts such as Cerium, Iridium, Palladium and Rhodium in a compression ignition engine resulted in improved combustion and emission characteristics of biodiesel blend [12]

Dual fuel operation in diesel engines is considered as another important option to use vegetable oils effectively under engine modification side. Fuels possessing high octane number such as alcohol, hydrogen, LPG are generally preferred as primary fuels and the fuels having high cetane number like diesel, vegetable oil are used as pilot fuel [15-17]. Past investigations reported significant improvement in engines performance and reduced smoke and NO_x emissions with alcohol as primary fuel using vegetable oil as pilot fuel [15]. However alcohols result in higher HC and CO emissions at all operating conditions of dual fuel operation. Though hydrogen is very attractive fuel for primary fuel operation, the very high flame speed and low ignition energy of hydrogen cause pre ignition and backfire problems if used as fuel. LPG looks very promising fuel for engine operation due to its availability, safety and storage. Earlier investigations on LPG as primary fuel in dual fuel reported promising results with diesel and vegetable oil as pilot fuels [18-20].

It is clear from the above studies that emulsifying the oil is a simple and effective method of using vegetable oils in diesel engines as fuel. However, past research indicated no results on the influence of nano additives with vegetable oil emulsions as fuel on engines behaviour of diesel engines. In addition the combined effect of LPG dual fuel operation with WCO solid nano additive emulsion (WCO-NF-EM) as pilot fuel on engines performance, emission and combustion behaviour of diesel engines was not reported so far. Adding solid nano additives with the emulsions and using them as fuel could achieve significant improvement in engines performance and reduction in all the emissions. Adopting dual fuel operation with LPG as inducted primary fuel and WCO emulsions with nano additive as injected pilot fuel could achieve best engine operation. In view of the above an attempt was made to use WCO effectively in a diesel engine. In the first phase the engine was tested for its performance using neat WCO as fuel followed by WCO emulsion. In the second phase solid nano powder (Al₂O₃) was mixed with WCO emulsion by using an ultrasonic agitator and tested as fuel under variable load conditions. Finally the intake system of the engine was modified to accommodate LPG for dual fuel operation and engine tests were conducted using WCO-

NF-EM as pilot fuel with LPG as primary fuel at different power output with varying amount of LPG to optimise the energy share. All the methods were compared at 20%, 40%, 60%, 80% and 100% power outputs.

2. Fuel Preparation and Properties Study

For the engine trials WCO of sunflower was procured from the institute hostel for about 25 litres. Collected WCO was filtered with coarse and fine filters and properties such as viscosity, density lower heating value were measure. The measured properties can be seen in Table.1

Table 1. Properties of Fuels

Properties	ND	NWCO	WCO-EM	WCO- NF-EM	ASTM Standard
Viscosity (cst)	4.6	45	49	44	D 445
Density (Kg/m ³)	840	886	895	880	D 1298
Low heating value (kJ/kg)	43500	40000	38000	41000	D 5865
Cetane number	45	37	42	44	D 613

(ND – Neat Diesel, NWCO – Neat Waste Cooking Oil, WCO-EM – Waste Cooking Oil Emulsion, WCO–NF–EM- Waste Cooking oil solid Nano additive Emulsion)

2.1 WCO Emulsion Preparation:

Emulsions are generally obtained by mixing two immiscible liquids in the presence of a stabilizer called as surfactant. The surfactant permits the water to get mixed well with oil. It reduces the interfacial tension of the oil and allows the water droplets to get dispersed uniformly in the continuous oil phase. The choice of surfactant is important because it influences the type of emulsion formation and its stability. For the present work, surfactant having HLB value less than 7 has to be used for preparing water in oil emulsion. Hence SPAN 80 (with HLB value as 4.2) was chosen as the best surfactant for making water WCO emulsion. The WCO emulsions were prepared by using a mechanical agitator which rotated at the speed of 2000 rpm. Initially a number of trials were made with different combinations of water, oil, surfactant and co surfactant. Ternary diagram shown in Figure 1 was plotted to study the stability of the prepared emulsions. From the stability point the mixture of 75% of WCO, 15% of water, 5% of SPAN 80 and 5% ethanol by volume resulted in maximum stability for 10 days. Hence the above combination was selected for engine tests. The same was used for preparing the WCO emulsion with solid nano additive as well.

2.2 Solid nano powder addition

Nano fluids are the fluids with dispersed nano particles present in it. WCO- NF- EM was prepared by using an ultrasonic agitator and the mechanical stirrer as shown in Figure 2. For the work is Aluminium oxide of size 50-60 nm was selected was selected for preparing the WCO solid nano additive emulsion due to its better thermal conductivity. Initially 50 ppm of aluminium oxide nano particles was made dispersed

in 15% by volume of water with help of the ultrasonicator. The ultrasonic agitator was allowed to operate at the amplitude of 20 μm with a frequency of 20 kHz for a period of 30 minutes for the complete dispersion of nano particles in the water. Prepared nano powder was mixed well with WCO emulsion with the help of mechanical agitator to obtain the WCO-NF-EM. From the stability test it was observed that the nano additive with the WCO emulsion was stable for 7 days.

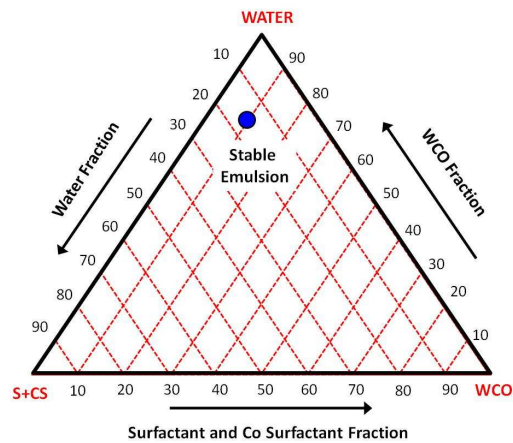


Figure 1. Ternary Diagram for stable emulsion



Figure 2. Ultrasonic Agitator and Mechanical Stirrer arrangement

3. Engine Experimental Setup and Experiments conducted

The engine used for this work was a constant speed, single cylinder, water cooled, naturally aspirated, compression ignition engine with the rated power output of 3.7kW at 1500 rpm. Burette and stop watch arrangement was used to measure the fuel flow rate. Engine speed was measured by an inductive pick and the torque was measured by an Eddy current dynamometer (BENZ SYSTEMS) coupled directly with the engine. An AVL NDIR exhaust analyser was used for measuring HC, CO and NO in the exhaust. The HC and NO emissions were measured in terms of ppm and CO emission was measured as % by volume as standard units. Black carbon smoke levels were obtained by using a standard AVL smoke meter. The in

cylinder pressure crank angle histories were obtained by using a KISTLER air cooled piezo electric pressure sensor and a AVL TDC encoder fitted at the crank shaft. An AVL INDISMART combustion analyser was used for acquiring the pressure crank angle histories. The details of the instruments used for the experiments and their uncertainty can be seen in Table 2. The test engine setup can be seen in Figure 3.



Figure 3. Photographic view of the test engine setup

The engine was initially run with ND and NWCO as fuels in single fuel mode at different loading conditions such as 20%, 40%, 60%, 80% and 100% loads (power outputs) to provide baseline reference. Engine experiments were repeated with WCO-EM and the WCO-NF-EM as fuels for comparison. Finally dual fuel operation was achieved by inducting the primary fuels along with air during the suction stroke of the engine by using a LPG induction system. The amount of primary fuel (LPG) admission was varied by using a flow control unit and the amount of gas supplied was measured by a gas flow meter. Engine trials were initially made to optimise the injection timing for the all the methods adopted. The injection timing was varied from 21 to 29° BTDC with 2° crank angle intervals for each method. The engine's brake thermal efficiency was considered for the optimisation criteria. The injection timing with maximum brake thermal efficiency was selected as the optimal injection timing. From the experiments the fuel injection timing was optimised and set as 25° BTDC for single fuel operation and 27° BTDC for WCO, WCO-EM and WCO-NF-EM. The same injection timing was used for dual fuel operation also. The optimal injection timing for diesel was 23° BTDC. The LPG admission was varied from 0 to the maximum possible limit until the engine knocks or misfire and found as 22% for the best efficiency at 100% load. The variable load tests were carried out with the fixed LPG share of 22% for dual fuel operation with WCO-NF-EM as pilot fuel. Readings for engine speed, torque, exhaust gas temperature and fuel flow were recorded for obtaining performance parameters. Emissions were obtained from analyzers for each loading conditions. Combustion pressure

crank angle histories were acquired by the AVL combustion analysers. All the experiments were repeated three times to check for repeatability in measured values.

Table 2. Details of used instruments and their uncertainty details

S.No.	Parameter	Instrument Used	Measuring range	Accuracy	Percentage uncertainty
1	Brake Power (kW)	Eddy current Dynamometer (BENZ SYSTEMS)	0-50kW	± 0.5 kW	$\pm 1\%$ (kW)
3	Fuel flow rate (g/cc)	Burette and Stop watch	0-200 g	0.5 g	$\pm 2\%$ (g/sec)
4	In cylinder pressure	AVL Indi smart with Kistler Pressure sensor	0-100 bar	± 0.1 bar	$\pm 1.2\%$ bar
5	Carbon Monoxide (%)	AVL Digas 444 five gas analyzer	0-10% (vol)	$\pm 0.03\%$	$\pm 0.8\%$ (%)
6	Hydrocarbon (ppm)	AVL Digas 444 five gas analyzer	0-20000 ppm (vol)	± 10 ppm	$\pm 0.9\%$ (ppm)
7	Oxides of Nitrogen (ppm)	AVL Digas 444 five gas analyzer	0-5000 ppm (vol)	± 10 ppm	$\pm 1\%$ (ppm)
8	Smoke opacity (%)	AVL 437 C Smoke meter	0-100%	$\pm 1\%$	$\pm 1\%$ (%)

4. Results and Discussion

4.1 Engine Performance Characteristics:

Variation of brake thermal efficiency with brake power of ND, NWCO, WCO-EM and WCO-NF-EM and the WCO-NF-EM-LPG could be seen in Figure 4.

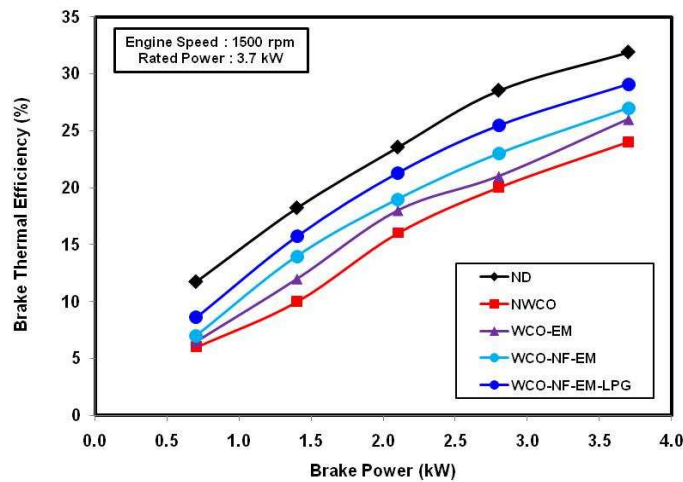


Figure 4. Variation of Brake Thermal Efficiency with Brake power

It is clear from the graph, brake thermal efficiency of all the fuel increased with brake power. It can be seen that NWCO resulted in lower BTE as compared to ND operation at all power outputs. It was 24% with NWCO and 31.9% with ND at the maximum power output of 3.7 kW. The reduction in brake thermal efficiency of NWCO is due to the incomplete combustion of the highly viscous NWCO as a result of poor atomization and vaporization process. However, with WCO-EM the BTE was observed to be superior at all power outputs and found as 26% at the maximum power output. The increase in BTE of WCO -EM is mainly due to the presence of water molecule in the emulsion which resulted in the micro-explosion of the emulsified fuel. Micro-explosion resulted in the secondary atomization of the injected fuel which could help in improvement in mixture preparation and paid for more amount of energy release due to complete combustion. Further increase in the brake thermal efficiency was observed with WCO-NF-EM at all power outputs as compared to WCO-EM and NWCO. It could be explained that the presence of metal based catalyst (Al_2O_3) in the WCO-NF-EM increased the mixing characteristics of injected fuel and air due to its higher surface to volume ratio. The improvement in calorific value of the WCO-NF-EM may have helped in more energy release and increased the brake thermal efficiency. The BTE was noted as 27.2% with the WCO-NF-EM at peak power output. It is interesting to see that dual fuel operation with LPG induction showed further improvement in thermal efficiency of the WCO-NF-EM at all power outputs. The BTE reached to a maximum of 29.1% (which is very close to diesel value) at the maximum power output for the LPG energy share of 30%. The increase in BTE in dual fuel operation could be explained by the dual combustion process occurring in the engine. The spontaneous ignition of the injected WCO-NF-EM combined with the flame propagation through the LPG air mixture improved the heat release rates and resulted in higher brake thermal efficiency.

4.2 Engine Emission Characteristics:

The variation of HC (hydrocarbon) and carbon monoxide emissions with brake power for ND, NWCO, WCO-EM, WCO-NF-EM and WCO-NF-EM-LPG can be seen in Figures 5 and 6 respectively. HC emission was found to increase with increase in brake power for all the methods. This is due to the amount of fuel supplied to be more with raise in engine power. Due to the fixed air supply in diesel engines, the air fuel ratio becomes rich when the load is increased. Hence the oxygen availability is reduced at higher power outputs and results in higher HC emissions. NWCO resulted in higher HC emissions as compared to ND at all power outputs. The maximum value of HC was found to be 150 ppm at peak power output where as it was 80 ppm with ND. The high viscosity and slow burning nature of vegetable oil based fuels may be the reason for the increased HC emission with WCO. WCO-EM showed lower values of HC emissions at all power outputs as compared to NWCO. It can be explained by micro explosion of the emulsified fuel which improved the atomization characteristics of WCO emulsion, resulted in better mixing of fuel and air and improved the rate of combustion. Use of WCO-NF-EM reduced the HC emissions further at all power outputs as seen in Figure 5. The reduction in HC emission with the solid nano additive emulsion may be explained by the presence of oxygen in the nano powder which helped in oxidation of the hydrocarbon fuel as reported by Vijayakumar et al. [1]. It has been reported by Mehrdad et al. [13] that the higher surface to

volume ratio of aluminium oxide may result in better mixing of air and injected fuel which helps in increased rate of combustion. All these factors may have involved in complete combustion of WCO-NF-EM.

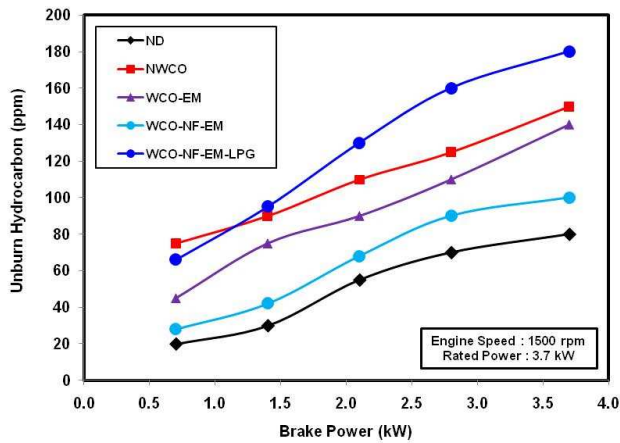


Figure 5 Variation of Unburn Hydrocarbon with Brake power

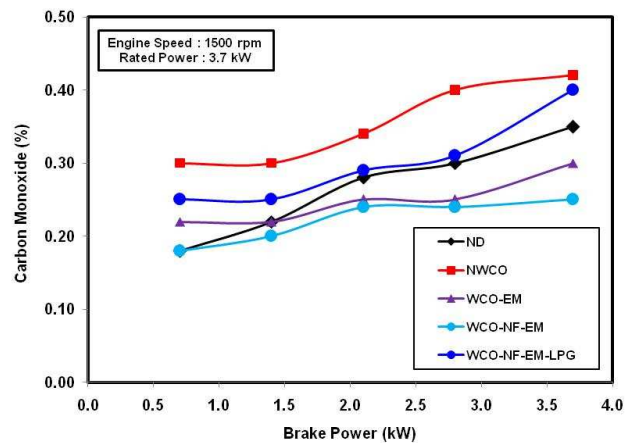


Figure 6 Variation of Carbon monoxide with Brake power

CO indicated in Figure 6 increased with increase in engine's power with all the methods as expected due to the reduced availability of oxygen for the oxidation of partially burned CO molecules. NWCO indicated very high levels of CO emissions as compared to ND operation at all operating conditions. The value was found to be 0.42% at peak power output where as it was 0.35% with ND operation. The raise in CO emission with NWCO can be explained by the low combustion temperature of the fuel which was not sufficient to oxidise the CO formed due to inferior combustion. WCO-EM showed reduced CO emissions as compared to NWCO at all power outputs. The reduction in CO emission with the emulsified WCO can be explained by the micro explosion process which helped in complete combustion of the fuel even with the reduced peak cycle temperature. The value at peak power output was noted to be 0.3% with WCO-EM. Further reduction in CO emission was noted with the WCO-NF-EM at all power outputs. The CO was reduced further to 0.25% with the solid nano additive emulsion at peak power which is still lower than diesel value. The reduction in CO emission was noted to be 29% and 40% as compared to ND and NWCO respectively. The reduction in WCO-NF-EM could be explained by the presence of excess oxygen content of the nano additive in the fuel which supported in the oxidation of CO molecule to carbon dioxide. Thus the level of carbon monoxide emission was lower. However dual fuel operation with LPG induction reported higher CO emissions at all power outputs with WCO-NF-EM as pilot fuel. In dual fuel operation with LPG admission as a result of fuel richness due to the insufficient oxygen the CO emission was noted to be higher.

The variation of oxides of nitrogen and smoke emissions with brake power can be seen in Figures 7 and 8 respectively for all the methods tried. As expected ND experienced highest oxides of nitrogen emission of all the fuels used at all power outputs. On the other hand, lesser oxides of nitrogen emission were observed with NWCO as compared to ND. The values were noted to be 300 ppm with NWCO and 350 ppm with ND at peak power output. As a result of reduced cycle temperature due to incomplete combustion of the NWCO the NO_x emission was found to be lower. Conversion of WCO into its emulsion and used as fuel indicated considerable reduction in NO_x emissions at all power outputs as compared to

NWCO. The higher latent heat of vaporization of ethanol and water present in the emulsion absorbed more heat for their evaporation and resulted in lesser cycle temperature. Thus WCO emulsion produced 250 ppm of oxides of nitrogen emission which was comparatively lesser than neat diesel and WCO. It must be noted that the NO_x emission was further reduced with the WCO-NF-EM mainly at higher power outputs. However past studies reported increase in NO_x with the solid nano additive emulsion as fuel. The reduction in NO_x emission with the WCO solid nano additive emulsion could be due to the availability of less oxygen participated in formation of NO_x. Referring to the Figure 7 that CO emission was minimal for the WCO-NF-EM at all power outputs which indicated that the availability of oxygen was utilised mainly for the formation of CO₂ was more. The NO_x emission was recorded as 180 ppm with the WCO solid nano additive emulsion at the maximum power output. However dual fuel operation indicated raise in NO_x at all power outputs due to the fast burning nature of the LPG which increased the cycle temperature of the engine.

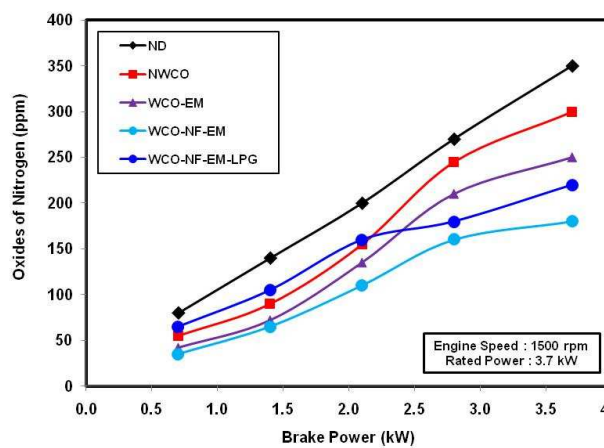


Figure 7 Variation of Oxides of Nitrogen with Brake power

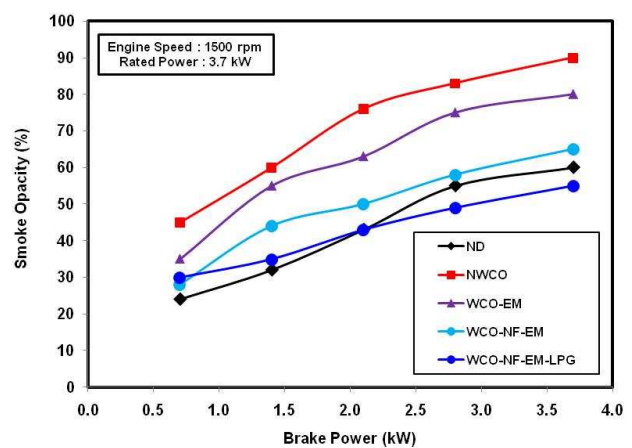


Figure 8 Variation of Smoke Opacity with Brake power

Experimental results presented in Figure 8 indicated very high levels of smoke emissions with NWCO at all power outputs as compared to ND. The value was noted to be 90% and 60% respectively for NWCO and ND at peak power output. The very high viscosity which is about 10 times higher than ND leads to poor atomisation of the injected fuel which resulted in coarse droplets to be present in the combustion chamber. Poor mixture preparation due to its higher viscosity and lower volatility reported maximum smoke values with NWCO at all power outputs as compared to ND operation. However the emulsified WCO (i.e. WCO-EM) reported comparatively lesser smoke emissions (80%) as compared to NWCO. It is mainly due to the secondary atomization of injected emulsified fuel because of the phenomenon called as micro-explosion. Inclusion of aluminium oxide solid nano additive with the WCO emulsion further reduced the smoke emission of the engine operated on WCO-NF-EM to a minimum of 65%. The above statement can be supported by the higher surface to volume ratio of the nano particles which helped in the better mixture formation and resulted in the reduction of smoke emissions at all power outputs. Dual fuel operation with LPG induction further reduced the smoke values of WCO-NF-EM mainly at high power outputs. At peak power output the smoke value was observed to be 55% which is noted to be still lower than ND value. In dual fuel operation with LPG induction the smoke reduction could be explained mainly by the combustion

process of the engine following the spark ignition combustion process. Induction of LPG achieved the constant volume combustion and reduced the smoke emissions at all power outputs. Due to the induction of LPG the injected pilot fuel quantity was also reduced due to the governor's role. Hence the smoke forming droplets from the pilot fuel were minimised. The smoke reductions with different methods were noted to be 11%, 28% and 39% respectively with WCO-EM, WCO-NF-EM and WCO-NF-EM-LPG as compared to NWCO at peak power output.

Cylinder peak pressure obtained from ensemble average of 100 cycles for ND, NWCO, WCO-EM, WCO-NF-EM and WCO-NF-EM-LPG at different power outputs can be seen in Fig.9. NWCO indicated lower peak pressure as compared ND at all power outputs.

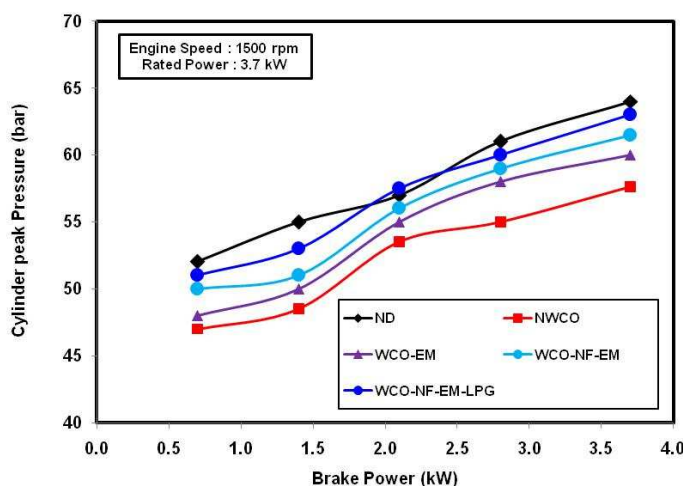


Figure 9 Variation of cylinder peak pressure with brake power

The slow combustion of the NWCO due to its poor atomisation and vaporisation due to its high viscosity resulted in cylinder peak pressure to be lower than ND. The peak pressure at the rated power output was observed as 57.6 bar and 64 bar respectively with NWCO and ND. However, the cylinder peak pressure increased with all the methods attempted with WCO as base fuel. The peak pressure increased to a maximum of 60 bar, 61.5 bar and 63 bar respectively with WCO-EM, WCO-NF-EM and WCO-NF-EM-LPG at peak power output. The increase in peak pressure with WCO-EM can be explained by the improvement in premixed burning rate of the heat release rate. The low cetane number of the emulsion resulted in increased ignition delay which caused a strong premixed combustion phase and gave rise in the cylinder peak pressure. As the combustion was accelerated due to the presence of nano particles in the WCO-NF-EM the peak pressure increased further. In dual fuel operation the peak pressure developed depends mainly on the combustion of the primary fuel air mixture. The fast flame propagation of the LPG air mixture enhanced the combustion rate and increased the cylinder peak pressure with WCO-NF-EM as pilot fuel.

The variation of heat release rate with different methods attempted can be seen in Figure 10 for the maximum output of 3.7 kW. The heat release calculation was done by considering the first law of conservation of energy principle using the averaged pressure crank angle histories. The cylinder contents were considered as homogeneous and act as ideal gas. Crevice effects were eliminated and specific heat ratio was calculated as a function of cycle temperature. All the methods followed the trend similar to ND.

The combustion was more pronounced at the diffusion phase rather than premixed phase with NWCO due to high viscosity and poor volatility. However, WCO-EM resulted in improvement in heat release rate at the premixed combustion period. Owing to the presence of ethanol and water fraction in the WCO emulsion, the ignition delay was increased which led to prepare more amount of combustible fuel within the period of ignition delay and increased the heat release rate. The accelerated combustion of the WCO-NF-EM increased the premixed combustion further as compared to WCO-EM. Dual fuel operation indicted the highest premixed combustion rate of all methods which is very close to diesel pattern. The raise in HRR with the dual fuel mode of operation could be explained by the combustion process moving to constant volume combustion on account of flame propagation through the LPG air mixture.

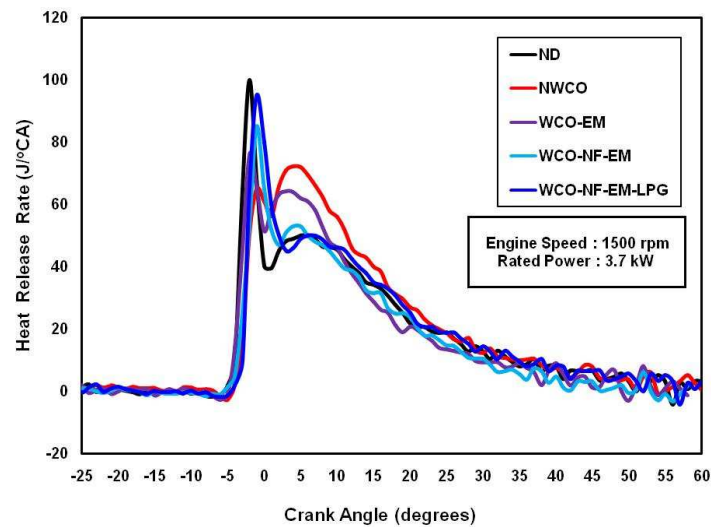


Figure 10 Variation of Heat Release Rate with Brake power

5. Conclusion

Effect of emulsification, solid nano powder additive and dual fuel operation on engine's performance, emission and combustion behaviour of a WCO based diesel engine was studied. WCO-EM considerably increased the BTE of the engine at all power outputs with reduced smoke, NO_x, HC and CO emissions. Conversion of WCO-EM into WCO-NF-EM and using as fuel achieved further improvement in BTE and reduction in all emissions. Dual fuel operation reached the highest thermal efficiency and lowest level of smoke values for the given engine power out. The values were very close to diesel. It was concluded that the WCO can be effectively used in diesel engines by converting it into its solid nano additive emulsion in the unmodified engine. Combining dual fuel operation with WCO-NF-EM- LPG could achieve the engine operation close to diesel operation using WCO as fuel.

References

- [1] Knežević, D.M., *et al.*, The Characteristics of Combustion Process of Diesel engine using vegetable oil methyl esters. *Thermal Science*, 19 (2015), 6, pp. 2255-2263

- [2] Tomic, M. D., *et al.*, Effects of Fossil Diesel and Biodiesel Blends on the performances and emissions of agricultural tractor engines. *Thermal Science*, 17 (2013), 1, pp. 263-278.
- [3] Hemanandh. J, *et al.*, Emission and Performance analysis of hydro treated refined sunflower oil as alternate fuel. *Alexandria Engineering Journal*, 54 (2015), 3, pp.389-393
- [4] Monirul. I.M. *et al.*, Influence of poly (methyl acrylate) additive on cold flow properties of coconut biodiesel blends and exhaust gas emissions. *Ren. Energy*, 101 (2017), pp. 702-712
- [5] Alessandro Corsini *et al.*, Pollutant Emissions in Common-rail Diesel Engines in Extra urban Cycle: Rapeseed Oils vs Diesel Fuel. *Energy Procedia*, 82 (2015), pp.141-148.
- [6] Marcelino Aurélio *et al.*, Comparative study of NOx emissions of biodiesel-diesel blends from soybean, palm and waste frying oils using methyl and ethyl transesterification routes. *Fuel*, 194 (2017), 15, pp. 144-156.
- [7] Alessandro Corsini *et al.*, Performance Analysis of a Common-rail Diesel Engine Fuelled with Different Blends of Waste Cooking oil and Gasoil. *Energy Procedia*, 101 (2016), pp. 606-613.
- [8] Joonsik Hwang *et al.*, Application of waste cooking oil (WCO) biodiesel in a compression ignition engine. *Fuel*, 176 (2016), 15, pp. 20-31.
- [9] Lei Qu *et al.*, Influence of waste cooking oil biodiesel on oxidation reactivity and nanostructure of particulate matter from diesel engine. *Fuel*, 181 (2016),1, pp.389-395
- [10] Senthil Kumar. M., *et al.*, A comprehensive study on performance, emission and combustion behavior of a compression ignition engine fuelled with WCO (waste cooking oil) emulsion as fuel,. *Journal of the Energy Institute*, 87 (2014), pp. 1–9.
- [11] Plaban Bora *et al.*, Formulation of micro emulsion based hybrid biofuel from waste cooking oil – A comparative study with biodiesel. *Journal of the Energy Institute*, 89 (2016), pp. 560-568.
- [12] Vishal Saxena *et al.*, A comprehensive review on combustion and stability aspects of metal nanoparticles and its additive effect on diesel and biodiesel fuelled C.I. engine, *Renewable and Sustainable Energy Reviews*. 70 (2017), pp. 563–588.
- [13] Mehrdad Mirzajanzadeh *et al.*, A novel soluble nano-catalysts in diesel–biodiesel fuel blends to improve diesel engines performance and reduce exhaust emissions. *Fuel*, 139 (2015), pp. 374–382
- [14] Vijayakumar Chandrasekaran., The role of nano additives for biodiesel and diesel blended transportation fuels. *Transportation Research, Part D* 46 (2016), pp. 145–156.
- [15] Jamuwa, D.K., *et al.*, Experimental investigation of performance, exhaust emission and combustion parameters of stationary compression ignition engine using ethanol fumigation in dual fuel mode. *Energy Conversion and Management*, 115 (2016), pp.221–231.
- [16] Lata D.B., *et al.*, Theoretical and experimental investigations on the performance of dual fuel diesel engine with hydrogen and LPG as secondary fuels. *International journal of hydrogen energy*. 35 (2010), pp. 11918 -11931
- [17] Kapilan N., *et al.*, Combustion And Emission Characteristics Of A Dual Fuel Engine Operated With Mahua Oil And Liquefied Petroleum Gas, *Thermal Science*, 12 (2008),1, pp. 115-123
- [18] Tira. H.S. *et al.* Characteristics of LPG-diesel dual fuelled engine operated with rapeseed methylester and gas-to-liquid diesel fuels. *Energy*, 47 (2012), pp. 620-629.

- [19] Kumaraswamy. A., *et al.*, Performance Analysis of a Dual Fuel Engine Using LPG and Diesel with EGR system, *Procedia Engineering* 38 (2012) 2784 – 2792.
- [20] Vijayabalan, P., *et al.*, Performance, Emission and Combustion Characteristics of a CI engine using liquid petroleum gas and neem oil in dual fuel mode. *Thermal Science*, 14 (2010), 4, pp. 923-935.

Submitted: 11.01.2017
Revised: 10.04.2017
Accepted: 20.04.2017