

## STUDY ON COLD STARTING PERFORMANCE OF A LOW COMPRESSION RATIO DIESEL ENGINE BY USING INTAKE FLAME PREHEATING

by

**Chao ZHANG, Bolan LIU\*, Jingchao HU, Xiyang YU, and Xiaogang WANG**

School of Mechanical Engineering, Beijing Institute of Technology,  
Beijing, China

Original scientific paper  
<https://doi.org/10.2298/TSCI180724316Z>

*Power density improvement is one the main techniques for engine thermal efficiency promotion. For turbocharged Diesel engine, low compression ratio in normally adopted for safety consideration under high power density operation. However, low compression ratio tends to lead cold starting problem. In this study, the influences factors and performances of a 10-cylinder turbocharged Diesel engine was investigated. An intake flame preheating model was built and validated by series of bench tests. The optimization of starting parameters and flame heating was conducted eventually. Based on the study, the basic performance flame preheating system under different conditions was disclosed. The cold starting boundary parameters of the Diesel engine was found. Moreover, the best starting fuel injection parameters were acquired. The research is beneficial for Diesel engine power density promotion based on cold starting ability.*

*Key words: low compression ratio, cold start, intake flame preheating*

### Introduction

Thermal efficiency improvement is one of the driving forces for the development of internal combustion engines [1-3]. It is well known that increasing power density can beneficially improve thermal efficiency [4]. Thus, in order to promote engine power density, it needs to do more work in unit time or get more air into the cylinder to burn more fuel [5, 6]. The two-stage turbo charging is used as a common method, which can improve the indicated mean effective pressure (IMEP) of Diesel engine effectively. From the aspect of structure and material, enhancing the body strength and stiffness of engine can improve the power and economic performance. However, there is always a limit of strength and stiffness, with the absence of great progress in material and technology of Diesel engine manufacturing [7-9]. By ultra-high boosting pressure, it is necessary to use some method to restrict the improvement of maximum pressure, to ensure that with the increase of IMEP, the thermal load and mechanical load remain at the same level, the usual method is to reduce the compression ratio (CR) [1-3].

Therefore, the development trend of Diesel engine technology to improve power density is to reduce the CR. The CR of the direct injection Diesel engine is about 18-22, and it can even be reduced as low as 12 after adopting the high turbocharging technology [10, 11]. Under normal temperature and running conditions, it has little effect on the working of Diesel engine,

---

\* Corresponding author, e-mail: liubolan@bit.edu.cn

but when the engine running in the extremely cold weather, the temperature at the end of compression stroke cannot reach the spontaneous combustion temperature of diesel fuel, which will cause the engine cannot start up and work normally [12, 13]. Besides, the performance of the storage battery will reduce owing to the low temperature, which will cause the performance reducing of the start-up system [14, 15]. Low temperature has great influence on the cold start performance of Diesel engine. The maximum speed of a Diesel engine depends on the power provided by fuel combustion and the friction torque of Diesel engine [16]. When the ambient temperature is low, the viscosity of the lubricating diesel is larger, and the friction torque of the Diesel engine is increased, more fuel is needed to overcome the friction resistance and pump loss. with the decrease of temperature, the temperature at the end of compression stroke will decrease, the time of spontaneous combustion is postponed, which leads to misfire, and the number of the misfire cycle will increases with the decrease of the speed [17]. To solve this problem, it is necessary to add various kinds of auxiliary starting measures, many scholars have done a lot of researches on this problem.

In this paper, a 10-cylinder Diesel engine model was built and validated, the limit boundary conditions of Diesel engine cold start was studied based on the model. An intake flame preheating system model was built and validated by several sets of bench test. Based on the simulation and test, the effects of the ignition performance, combustion stability, air preheating characteristics and gas composition on the preheating system were studied under the condition of variable wind speed, variable temperature and variable preheating fuel supply. This research provides an effective basis for the reliability of the intake flame preheating system, which makes it more reliable to increase the power density by reducing the CR.

## **Experimental set-up and test methodology**

### *Experimental set-up*

The main purpose of the preheating test bench is to improve the temperature of the intake air through the combination of the circuit path and the fuel path to burn the fuel in the intake pipe, and achieve the best preheating effect, through the matching and optimization of fuel and electricity.

The schematic diagram of the test bench system is shown in fig. 1. The system mainly includes mechanical part, circuit part, fuel line part, data acquisition part and control system, which can be seen in tab. 1. The axial flow fan blows the air into the intake manifold. The ECU controls the on-off of the relay and the solenoid valve, thereby controlling the on-off of the circuit path and the fuel path.

### *Test methodology*

The main purpose of this test is to provide validation for the intake preheating model. The test was carried out under different environment conditions, and the preheating effect mainly includes the preheating temperature rise (TR), the oxygen content after preheating, the ignition performance, and the combustion stability, and so on. The air velocity in the simulated intake pipe is adjusted by adjusting the speed of the fan, which simulates the air velocity in the intake pipe at different starting speeds of Diesel engines. The fuel supply can be changed by adjusting the opening of the limiting valve, the maximum adjustable range of fuel flow is from 1 mL/min. to 30 mL/min. The fuel pressure can be changed by regulating the opening of the regulating valve, the range of pressure in the test is 2-4 bar. The electric heating time, ignition time and flame preheating time can be controlled separately by changing the power up time of

relay and solenoid valve. The ambient temperature during the test period is between 0-10°, which meets the temperature condition of cold start preheating.

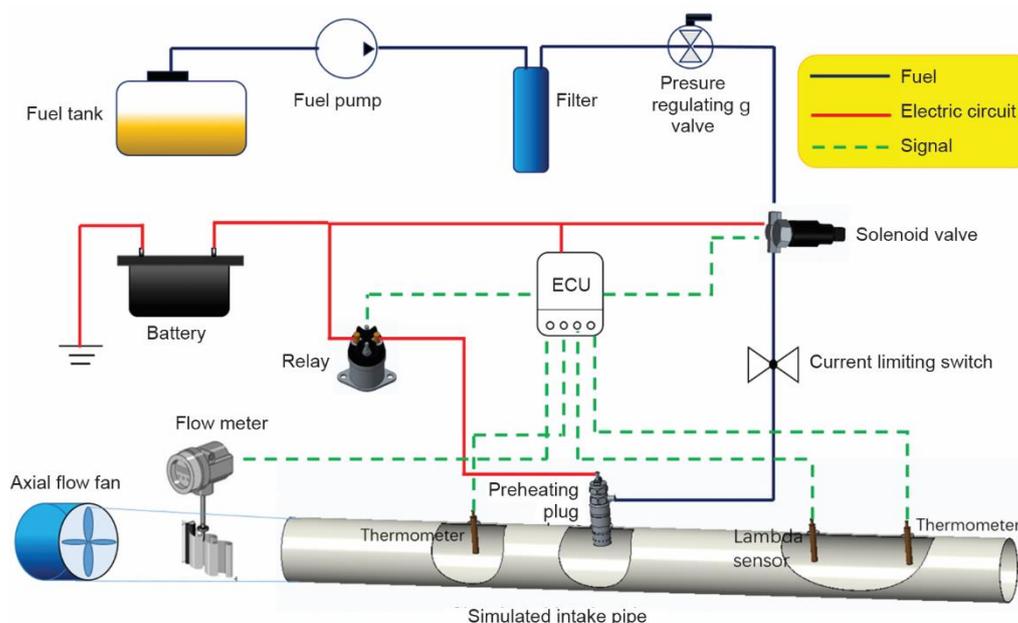


Figure 1. The schematic diagram of the test bench system

Table 1. The compositions of the test system

Subsystem	Composition
Mechanical part	Brackets, intake pipe, axial flow fan
Circuit part	Storage battery, relay, solenoid valve, preheating plug
Fuel line part	Tank, fuel pump, fuel filter, preheating plug, pressure regulating valve
Control system	Control box
Data acquisition part	Vortex flow sensor, thermometer, lambda sensor, fuel pressure meter, image equipment

### Intake preheating system model and the whole engine model

#### Mathematical model of intake preheating

The preheating plug is installed on the head of the simulated intake pipe, which is mainly composed of three components, injector, igniter (electric heating column), and shell. When the system begin to work, the electric resistance wire is heated until the temperature of heating column rise to the spontaneous combustion temperature of diesel fuel. Diesel fuel is injected to the electric heating column and begins to burn, which generates a lot of heat. Heated air, unburned fuel and combustion products get into the cylinder. The combustion process can be expressed by the following chemical equation (excluding combustion by-products):



This process can make the following assumptions: the gas in the intake pipe is simulated as 1-D steady flow, and the variation of intake pressure can be ignored. For the process of heating a flow of gas by a flame, according to the conservation of energy:

$$\frac{dU}{dt} = \frac{dW}{dt} + \frac{dQ}{dt} + h \frac{dm}{dt} \quad (2)$$

where  $U$  is the internal energy of air intake,  $W$  – the work done by the system,  $Q$  – the quantity of heat supplied to the system by its surroundings,  $m$  – the mass of intake air in unit time, and  $h$  – the specific enthalpy.

The work done by the system and the energy change caused by mass exchange can be neglected, and the following formula can be obtained:

$$\frac{dU}{dt} = \frac{dQ}{dt} = \frac{dQ_B}{dt} - \frac{dQ_w}{dt} \quad (3)$$

where  $Q_B$  is the heat released from diesel combustion,  $Q_w$  – the heat dissipated by air through the intake pipe wall to the environment. Neglecting the effect of excessive air coefficient,  $dU = d(mu)$ , the following formula can be obtained:

$$\frac{d(mu)}{dt} = u \frac{dm}{dt} + mC_v \frac{dT}{dt} \quad (4)$$

where  $C_v$  is the specific heat. Due to the volume of pipe is a constant, the specific heat is considered as  $C_v$  (specific heat at constant volume).

Then the TR after preheating in the intake pipe is:

$$\frac{dT}{dt} = \frac{1}{mC_v} \left( \frac{dQ_B}{dt} - \frac{dQ_w}{dt} \right) \quad (5)$$

It can be seen from the formula, the preheating TR and the air-flow velocity in intake pipe are related to the flow of fuel and the amount of heat lost to the environment.

The heat released from diesel combustion is:

$$\frac{dQ_B}{dt} = H_u \eta_u \rho_f \frac{dV_f}{dt} \quad (6)$$

where  $H_u$  is the lower heat value of the diesel fuel used,  $\eta_u$  – the combustion coefficient of diesel fuel,  $\rho_f$  – the density of diesel fuel, and  $V_f$  – the volume flow of diesel in unit time.

The wall heat dissipation of the intake pipe is:

$$\frac{dQ_w}{dt} = \alpha_A A (T - T_w) \quad (7)$$

where  $\alpha_A$  is the heat dissipation coefficient of wall,  $A$  – the total surface area of the heat dissipation of the simulated intake pipe, and  $T_w$  – the inner wall temperature of the intake pipe.

Suppose the gas is ideal gas, then:

$$mC_v \frac{dT}{dt} = \left[ H_u \eta_u \rho_f \frac{dV_f}{dt} - \alpha_A A (T - T_w) \right] \quad (8)$$

The amount of air consumed by diesel combustion is:

$$\frac{dV_a}{dt} = \frac{\rho_f l_0}{\rho_a} \frac{dV_f}{dt} \quad (9)$$

where  $V_a$  is the volume of consumed air,  $\rho_a$  – the density of air, and  $l_0$  – the theoretical air fuel ratio of diesel combustion.

Figure 2 shows the model of intake preheating system, and fig. 3 shows the whole engine model, which are built by GT-POWER. The whole Diesel engine model contain six independent subsystem, Intake and exhaust system, cylinder system, turbo-charging system, cooling system, leakage model and starting system.

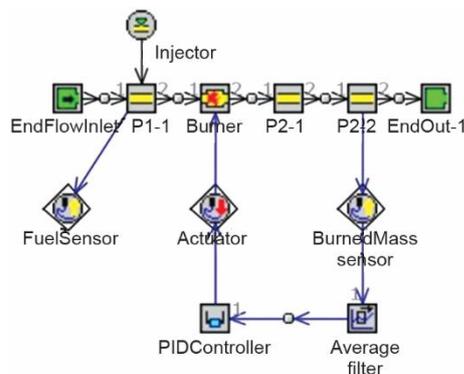


Figure 2. Simulation model of intake preheating system


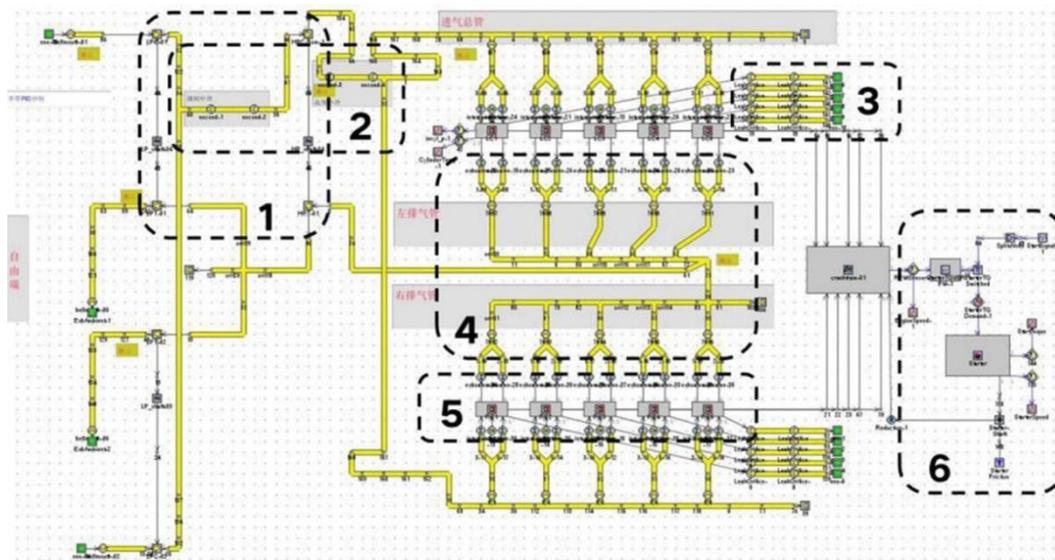


Figure 3. Simulation model of 10-cylinder Diesel engine

### Model validation

By conducting some intake flame preheating tests under different ambient temperature, wind speed and preheating fuel supply, the intake flame preheating model was validated under different running conditions. For all these working points, the model accuracy is controlled within 8% error range, which is the guarantee of the prediction for starting assist under different flame preheating support for the low compression Diesel engine. The flame preheating test parts can be found in section *Intake flame preheating performance*.

The 10-cylinder model was validated through the cylinder pressure curve under different engine working points. As can be seen from fig. 4, the rated point was illustrated as an example, though there are some differences in the decline section of the explosion pressure, the

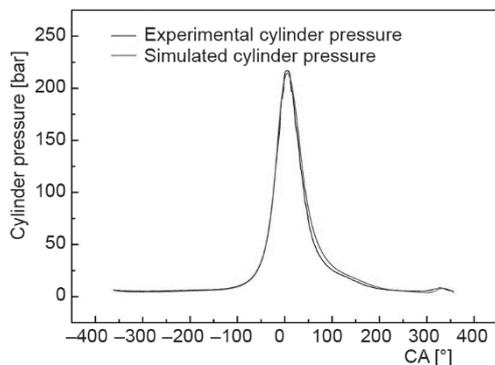

**Figure 4. Validation of the 10-cylinder Diesel engine model at rated point**

maximum error is less than 4%, except this, the simulation cylinder pressure curve at other stages is well matched with the test cylinder pressure curve. The study of the intake flame preheating on the LCR Diesel engine start ability can be performed by using the combined model.

## Results and discussion


### Intake flame preheating performance

A series of the intake flame preheating tests was conducted on the test bench. Both the bench structure and modulating parameters are designed to simulate the possible running conditions of the real operations.


The tests of different ambient temperature were conducted to simulate different engine starting thermal environment. The varied intake manifold mass-flow rate is simulated by different channel wind speed according to engine idle speed. The flame preheating fuel supply is adjusted by adjusting the opening of limiting valve and the appropriate level of fuel supply is evaluated based the photography of the flame combustion status.

The TR of preheated air under different ambient temperatures, different wind speed and different preheating fuel supply are shown figs. 5-7 respectively. There are three parameters were investigated, at each figure, the fixed other two parameters was chosen as follow, ambient temperature: 8.2 °C; wind speed: 7 m/s; fuel supply: 8 mL per minute.

As can be seen from fig. 6, under different ambient temperature, the higher the ambient temperature is, the temperature of air at the rapid-rise period and the stabilization period is higher, but the final TR is all between 40-50 °C. The 10 °C of intake can be promoted for every 5 °C environment increment. A similar trend can be seen from fig. 8, the greater the fuel supply, the higher the TR. However, at different wind speeds, which can be seen from fig. 7, the initial TR of 9 m/s wind speed is slightly faster than that of 7 m/s and 5 m/s, and in the later stage, the faster the wind speed, the lower the TR. This is because at beginning of preheating, it is faster

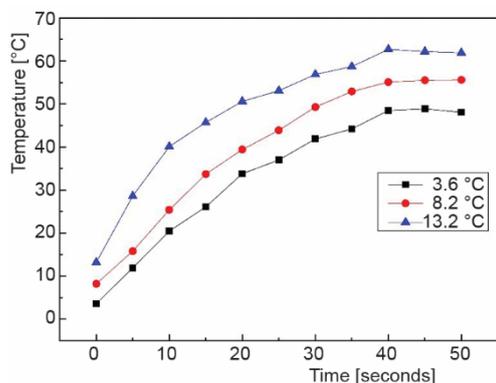

**Figure 5. The TR under different ambient temperatures**

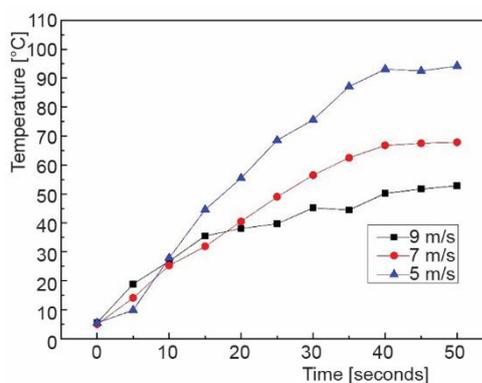

**Figure 6. The TR under different wind speed**

that the heated air-flow reach the end of the pipeline at higher wind speed. However, in later stage, the higher the wind speed, the bigger the volume of air flowing through the preheating plug in unit time, when the preheating fuel supply is fixed, the heat released in unit time is the same, and the larger the flow rate, the more serious the heat is diluted.

During the testing, there was some dripping liquid fuel below the flame preheating plug and outflow at the end of the pipe. Measuring the flow at the end of the pipeline with the measuring cylinder, and that is called *residual fuel*. Figure 8 shows the residual fuel situation under different preheating fuel supply. It can be seen that when the fuel supply exceeds 8 mL per minute, the greater the fuel supply is, the more the residual fuel is, which should be avoided as far as possible.

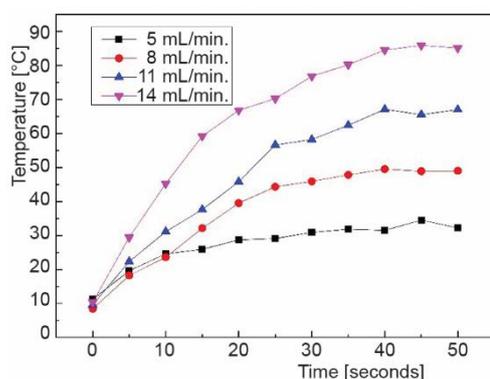


Figure 7. The TR under different preheating fuel supply

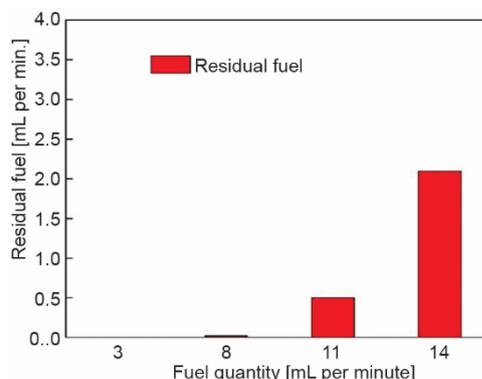


Figure 8. Residual fuel

The flame combustion state in fig. 9 is shown at different preheating fuel supply. In the case of the fuel supply is 5 mL per minute, the flame is small and red. With the increase of fuel supply, the volume of flame begins to increase. When the fuel supply is above 14 mL per minute, there are some sporadic sparks appear around the main flame, and unburned small droplets that are visible to the naked eye fall on the pipe wall. This indicates that the dripping fuel cannot be completely evaporated and burned at the time, and the white smoke is emitted at the end of the intake pipe. Due to the constantly flowing air, the oxygen is sufficient for the combustion of fuel in the preheating plug. However, the fuel is streaming down but not dropping when the fuel supply exceeds 8 mL per minute, and there is an area limitation of resistant wire, therefore, not all fuel can be heated and burned.

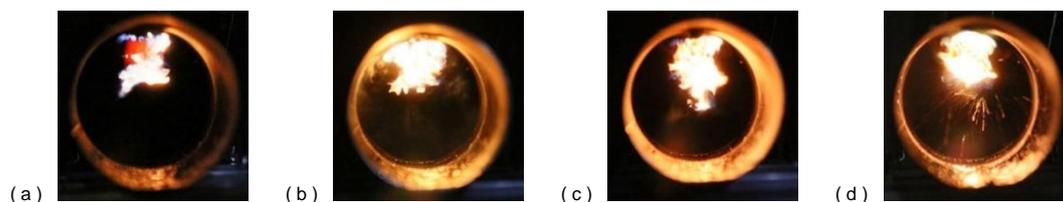



Figure 9. Flame combustion state under different preheating fuel supply; (a) 5 mL per minute, (b) 8 mL per minute, (c) 11 mL per minute, (d) 14 mL per minute

### Cold start characteristics of LCR Diesel engine


In order to explore the effect of parameters and environmental conditions on the performance of Diesel engine cold start, searching the limit boundary condition of Diesel engine cold start under different parameter matching, the simulation of cold start performance of Diesel engine was carried out at different CR, intake temperature, altitude and injection quantity.

The starting speed of Diesel engine under different CR, different intake temperature, and different altitude are shown in figs. 10-12, respectively. There are three parameters were investigated, in each figure, the fixed other two parameters was chosen as follows, CR: 14; intake temperature: 0 °C; altitude: 0 m.

As can be seen from the figures, with the decrease of CR, the decrease of intake temperature and the increase of altitude, the starting time of Diesel engine increases rapidly. The CR decreases leads to the thermal efficiency decreases, resulting in insufficient utilization of fuel and gas. Under the same fuel supply, the total energy of combustion heat release decreases, and the output power decreases. It can also be seen from the figures that, when CR is below 12, the temperature is below 0 °C and the altitude is above 1000 m, there is a faltering at speed rise period, which is an important factor affecting the speed stability and starting time of Diesel engine cold start. When the CR is lower than 12, the intake temperature is below -20 °C and the altitude is higher than 2000 m, the Diesel engine cannot start normally without auxiliary starting measures.

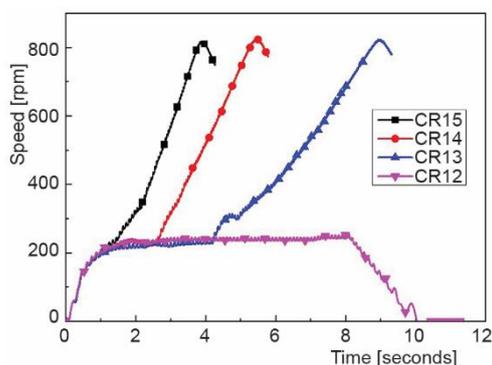


**Figure 10. Starting speed under different CR**

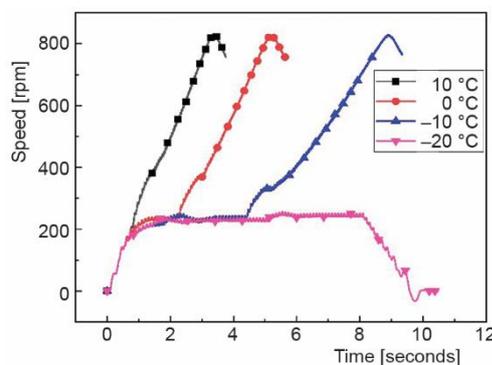


**Figure 11. Starting speed under different temperature**

Figure 13 shows the starting speed of Diesel engine and the first ignition cycle under different injection quantity, the CR is 14.5, the intake pressure is 1 bar, and the ambient temperature is 10 °C. As can be seen, the ignition time reduced to the minimum with the injection quantity increased near 60 mg/(cyc·cyl), only 1.6 seconds. Therefore, the optimal injection quantity for cold start is 60 mg/(cyc·cyl). When the amount of the main fuel injection continues to increase, the ignition time increases again, and the first ignition cycle postpone again, however, once ignition occurs, the increase rate of Diesel engine speed under heavy injection quantity will be higher than that of small injection quantity.

Pilot injection is an effective measure to improve the cold start performance of Diesel engine, the pilot injection can bring the cold flame effect, which can improve the temperature in cylinder before main injection, activate the heating atmosphere of mixed gas in cylinder,

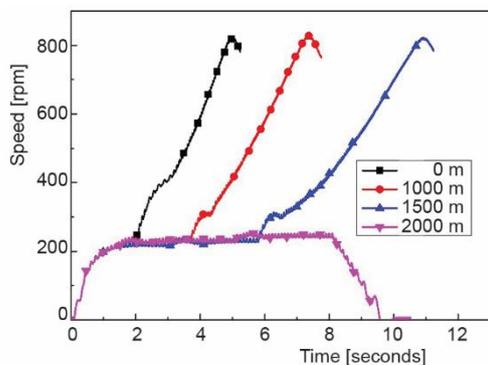


**Figure 12. Starting speed under different altitude**

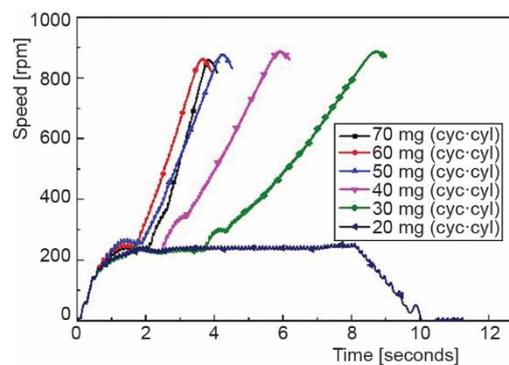

**Figure 13. Starting speed under different injection quantity**

improve the combustion conditions, shorten the ignition time [18, 19]. Figure 14 shows the starting speed of Diesel engine and the first ignition cycle under different pilot injection quantity. At each cases, the wind speed is 7 mL per minute, the ambient temperature is 0 °C, and the fuel supply is 8 mL per minute. As can be seen from the figure, an appropriate pilot injection quantity can shorten the ignition time. However, the starting performance will be reduced when the pilot injection quantity is too high, because the cold flame reaction time is insufficient, which is not conducive to the improvement of the combustion thermal atmosphere in the cylinder. The optimal pilot injection quantity is 5 mg/(cyc·cyl), which the ignition time is the least.

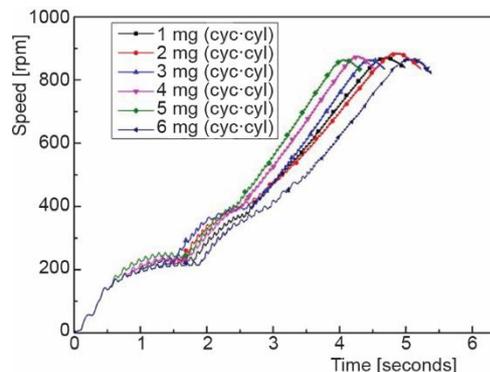


**Figure 14. Starting speed under different pilot injection quantity**

### **Optimization of Diesel engine cold starting by intake flame preheating**

The difficulty of cold start could be relieved by optimize the injection strategy, but there is no fundamental change in combustion and emissions, even could increase fuel consumption. According to the previously mentioned starting performance, the optimization of the cold starting control parameters was performed by using validated flame preheating model and diesel engine model.

Comparison of Diesel engine cold start speed with preheat and without preheat is shown in fig. 15. At each cases, the wind speed is 7 mL per minute, the ambient temperature is 10 °C, and the fuel supply is 8 mL per minute. The performance of cold start is greatly improved with preheating. Under the same starting injection quantity, the ignition time is obviously shortened, and the first ignition cycle is obviously reduced. In the case of the injection quantity is 30-70 mg/(cyc·cyl), the ignition time is reduced about 0.4-2.2 seconds, the first ignition cycle is reduced about 0-3. Without preheating, when the injection quantity is less than 20

mg/(cyc·cyl), the engine cannot start normally, but when the preheating system is added, it can start normally.

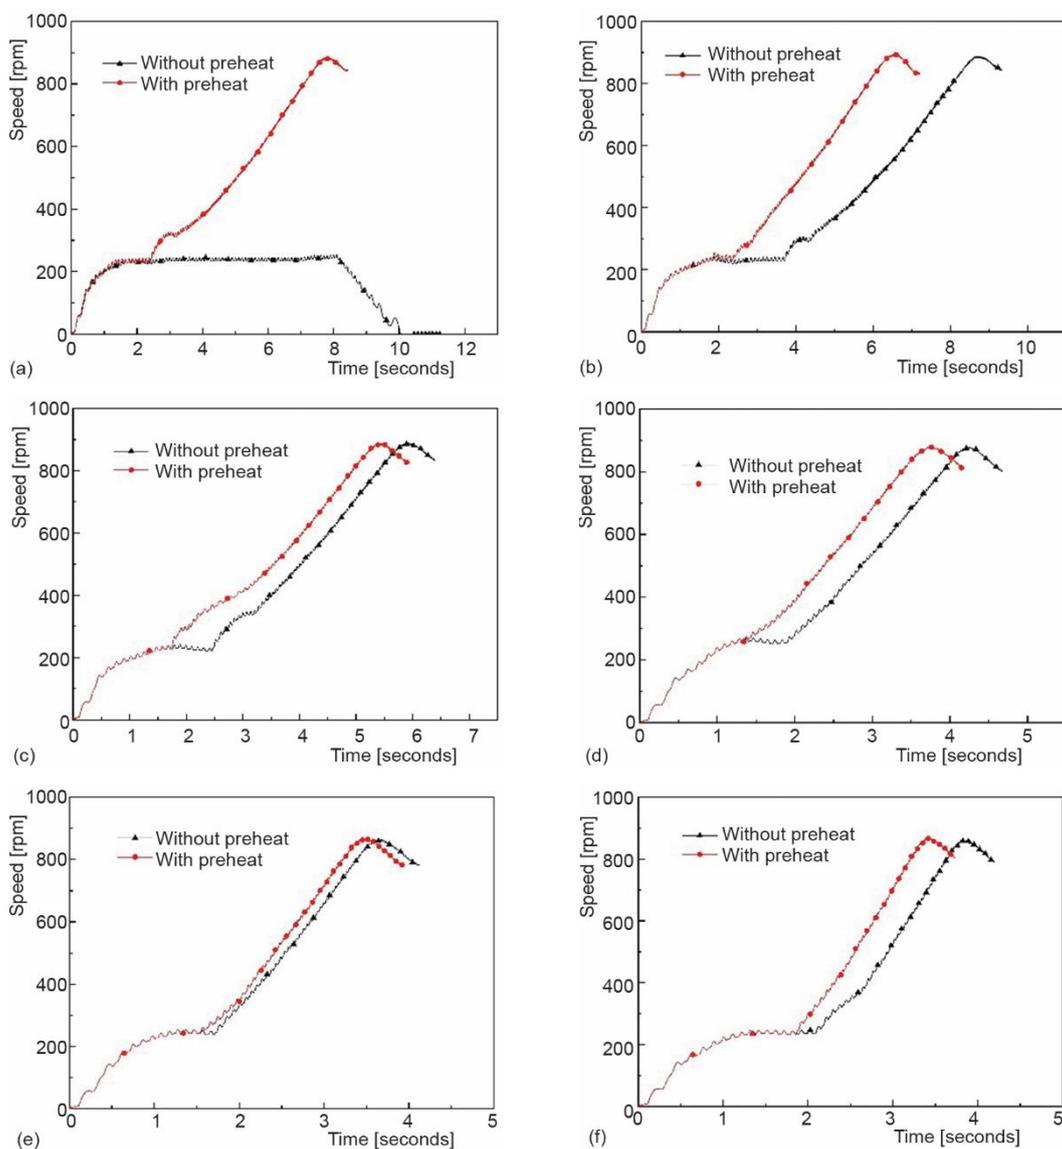


**Figure 15. Comparison of starting speed between the engine start with preheat and without preheat; (a) injection quantity = 20 mg/(cyc·cyl), (b) injection quantity = 30 mg/(cyc·cyl), (c) injection quantity = 40 mg/(cyc·cyl), (d) injection quantity = 50 mg/(cyc·cyl), (e) injection quantity = 60 mg/(cyc·cyl), (f) injection quantity = 70 mg/(cyc·cyl)**

Without preheating, as mentioned, the best starting performance appears at the injection quantity is 60 mg/(cyc·cyl), when the preheating system is added, as can be seen from the figure, the best point appears at the injection quantity is 50 mg/(cyc·cyl), which the ignition time is the least. The addition of the preheating system makes the atomization, evaporation and

mixing of diesel fuel more rapid, the suitable mixture concentration can be reached at lower injection quantity, the fuel consumption and emissions may be improved as a result.

Figure 16 shows the comparison of starting speed between the engine start with pilot injection but without preheat and the engine start with preheat but without pilot injection. At each cases, the fuel supply is 8 mL/min., the wind speed is 7 m/s, and the ambient temperature is 0 °C. From the figure, we can see that, although the speed rise rate under the condition of the engine start with pilot injection but without preheat is higher than that the engine start with preheat but without pilot injection, the ignition time of both is basically the same. This means that the intake flame preheating system can replace the pilot injection to improve the starting performance, which can reduce the complexity of fuel injection control, and to some extent, reduces the fuel consumption.

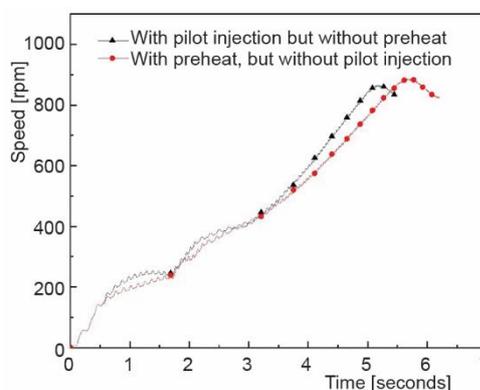

**Figure 16. Comparison of starting speed between the engine start with preheat and with pilot injection**

## Conclusion

In order to solve the difficulty of cold start of LCR Diesel engine, this paper built a 10-cylinder Diesel engine model and an intake flame preheating model which validated by several sets of bench tests. Based on the simulation and the test, the limit boundary conditions of Diesel engine cold start was studied, the factors affecting the performance of the intake preheating system were studied. The main conclusions can be found as follow.

- For the 10-cylinder Diesel engine intake system, every 5 °C of environment increment can bring average 10 °C temperature promotion of intake. Every 2 m/s of intake speed increment can bring average 15 °C temperature promotion of intake. The 8 mL per minute fuel supply is proper for the combustion of the preheating plug.
- The self-cold starting boundary for the Diesel engine is as follow: the CR is 12 (at 0 °C intake temperature and 0 m altitude), the intake temperature: -20 °C (at 14 CR and 0 m altitude), the altitude: 2000 m (at 14 CR and 0 °C intake temperature).
- The addition of intake flame preheating system can reduce the best starting injection fuel quantity from 60 mg/(cyc·cyl) to 50 mg/(cyc·cyl), the preheating system also can replace the pilot injection to improve the starting performance.

## Acknowledgment

This study is mainly sponsored by the Ministry Level Research Project under Grant no. 3030021211705. It is also a part of the Diesel Engine Development Program sponsored by the Ministry of Industry and Information Technology of the Republic of China (201820329080), and we are grateful for their financial support.

## Nomenclature

LCR	– low compression ratio [–]	CR	– compression ratio [–]
IMEP	– indicated mean effective pressure [MPa]	TR	– temperature rise [°CA]

## References

- [1] Zhang, W. Z., et al., Numerical Simulation Analysis of HPD Diesel Engine, *Acta Armamentarii*, 27 (2006), 5, pp. 775-778
- [2] Zhang, Y. S., High Power Density Diesel Engine and its Key Technologies, *Vehicle Engine*, (2004), 3, pp. 5-7
- [3] Wei, M., et al., Research on Capability of Cold Starting for Diesel Vehicle Engines in Extremely Cold Zone, *Chinese Internal Combustion Engine Engineering*, 23 (2002), 5, pp. 65-67
- [4] Luo, T., et al., Study of the Cold Startability of Diesel Engine with an Inlet Air Lame-Pre-Heater, *Chinese Internal Combustion Engine Engineering*, 27 (2006), 10, pp. 37-40
- [5] Zhu, Y., et al. Simulation Analysis on Effect of Variable Compression Ratio on Turbocharged and Inter-Cooled Diesel Engine Performance, *Transactions of the CSEA*, 28 (2012), 4, pp. 27-32
- [6] Liu, B., et al., Effects of Compression Ratio on Low-load Economical Performance of Turbocharged Diesel Engine, *Internal Combustion Engines*, (2016), 3, pp. 45-47
- [7] Bielaczyc, P., et al., A Method of Reducing the Exhaust Emissions from DI Diesel Engines by the Introduction of a Fuel Cut Off System During Cold Start, SAE Technical Paper 2001-01-3283, 2001
- [8] Oberdörster, E., et al. An Emerging Discipline Evolving from Studies of Ultrafine Particles, *Environmental Health Perspective Environment*, 113 (2005), 7, pp. 823-839
- [9] Chartier, C., et al., Effect of Injection Strategy on Cold Start Performance in an Optical Light-Duty DI Diesel Engine[J], *Sae International Journal of Engines*, 2 (2009), 2, pp. 431-442
- [10] Henein, N., et al., Diesel Engine Cold Starting: Combustion Instability, SAE Technical Paper 920005, 1992
- [11] Han, Z., et al., Diesel Engine Cold Start Combustion Instability and Control Strategy, SAE Technical Paper 2001-01-1237, 2001
- [12] Peng, H., et al., Improve Combustion During Cold Start of DI Diesel Engine by EGR Under Normal Ambient Temperature, SAE Technical Paper 2008-01-1084, 2008
- [13] Stanton, D., et al., Influence of Spray-Wall Interaction and Fuel Films on Cold Starting in Direct Injection Diesel Engines, SAE Technical Paper 982584, 1998
- [14] Hara, H., et al., Effect of Cetane Number with and without Additive on Cold Startability and White Smoke Emissions in a Diesel Engine, SAE Technical Paper 1999-01-1476, 1999
- [15] Starck, L., et al., Cold Start on Diesel Engines: Effect of Fuel Characteristics, *SAE Int. J. Fuels Lubricants*. 3 (2010), 2, pp. 165-174
- [16] Magno, A., et al., Experimental Investigation in an Optically Accessible Diesel Engine of a Fouled Piezoelectric Injector, *Energy*, 64 (2014), 9, pp. 842-852
- [17] Shi, Y., et al., Simulation for the Combustion System Work Process in Internal Combustion Engine, *Applied Mechanics and Materials*, 644-650 (2014), 9, pp. 394-397
- [18] Liu, B., et al., Influence of Pilot Injection Strategies on Combustion and Emissions of a Heavy Diesel Engine, *Transactions of CSICE*, 33 (2015), 3, pp. 201-209
- [19] Dong, W., et al., Effects of Pilot Injection on Start Characteristics of a Common-Rail Diesel Engine. *Transactions of Csice*, 26 (2008), 4, pp. 313-318