

## FLUID FLOW AND HEAT TRANSFER ENHANCEMENT IN WINGS WITH COMBINED SOLID RING TWISTED TAPE INSERTS CIRCULAR HEAT EXCHANGER TUBE

by

**Ravi DATT<sup>a,b</sup>, Mangal Singh BHIST<sup>c</sup>, Alok Darshan KOTHIYAL<sup>d</sup>,  
Rajesh MAITHANI<sup>e</sup>, and Anil KUMAR<sup>f\*</sup>**

<sup>a</sup> Department of Applied Sciences, Chitkara University, Solan, Himachal Pradesh, India

<sup>b</sup> Uttarakhand Technical University, Dehradun, Uttarakhand, India

<sup>c</sup> Department of Mathematics, Govind Ballabh Pant Engineering College (GBPEC),  
Pauri Garhwal, Uttarakhand, India

<sup>d</sup> Department of Basic Science, Group of Institutions – (BFIT), Dehradun, Uttarakhand, India

<sup>e</sup> Department of Mechanical Engineering, DIT University, Dehradun, Uttarakhand, India

<sup>f</sup> School of Mechanical and Civil Engineering, Shoolini University, Solan, Himachal Pradesh, India

Original scientific paper

<https://doi.org/10.2298/TSCI170613095D>

*Experimental examination is carried out to study the turbulent heat transfer and fluid-flow characteristics in circular heat exchanger tube using combined wing with solid ring twisted tape inserts. A series of experiments has been performed with the range of Reynolds number varied from 3000 to 21000, number of twisted taped inserts,  $N_{TT}$ , varied from 1.0 to 4.0 with constant value of other twisted tape parameters such as rings pitch ratio,  $d_R/D_T = 1.0$ , wing pitch ratio,  $P_W/W_T = 3.0$ , and wing depth ratio,  $W_d/W_T = 1.67$ . Based on the examined, turbulent heat transfer and fluid-flow in wing with combined solid ring twisted tape inserts results are compared with plain circular tube under same operating conditions. The experimental results show that the heat transfer is increased around 5.66 times than plane circular heat exchanger tube. The thermal and hydrodynamic performance parameter based on equal pumping power,  $\eta_p$ , was found to be highest for  $N_{TT} = 3.0$ . The optimum value of thermal and hydrodynamic performance has been found to be 2.74 for Reynolds number of 3000 within the range of the parameters investigated. Multiple wings with solid rings twisted tape inserts have been also shown to be thermally as well as hydraulically better in comparison to other similar twisted tape insert geometries.*

Key words: heat transfer enhancement, multiple twisted tapes, twists ratio, wing pitch ratio, wing depth ratio and solid rings

### Introduction

The heat exchanger tubes (HET) are the core components enriched with various insert geometries to enhance heat transfer rate in most of the mechanical and thermal equipment's used in engineering devices to industrial and house hold appliances [1-3]. In the present scenario many studies have been carried out with the aim of energy saving by minimize the size, cost and power consumption of various heat exchanger techniques [4-6]. The compact and geometrically enriched heat exchanger with various inserts was found an efficient way to enhance the

\* Corresponding author, e-mail: anil\_aheciit@yahoo.com

performance and efficiency of various equipment's [7-9]. The HET equipped with twisted tape (TT) inserts are widely employed techniques to enhance heat transfer rate and always perform better than plane tube [10, 11]. To promote better fluid mixing, turbulence is generated near the wall giving rise to more velocities near the boundary-layer and consequently enhances the heat transfer rate. The contribution of many researchers has been reported for the development of effective heat exchanger techniques to enhance passive heat transfer rate [12, 13].

Akhavan-Behabadi *et al.* [14] experimentally studied seven diverse coiled wires inserts with  $H_{TT}$  ratios varies from 12.0 mm to 69.0 mm and diameters was taken 2.0 mm and 3.50 mm. Meng *et al.* [15] investigated the  $f_{TT}$  performances in DDIR tube was used to solve the field synergy equation numerically. The experimental results showed that the DDIR tube inserts has better comprehensive  $h_{TT}$  performance than the current  $h_{TT}$  enhancement tubes.

Gawandare *et al.* [16] experimentally investigated the  $h_{TT}$  and  $f_{TT}$  characteristics of circular tube fitted with full length copper square jagged TT inserts. They revealed that there is a noteworthy  $h_{TT}$  augmentation due to TT inserts. Al-Fahed *et al.* [17] carried out an experimental investigation to study and compare the results of  $h_{TT}$  coefficients and pressure drop for a plain tube, micro fins and TT inserts in laminar flow section. The maximum values of  $h_{TT}$  were obtained for TT inserts having  $y_{TT}$  3.60 and 5.40 than that of loose fit TT inserts. Suri *et al.* [18] reviewed the various circular tube equipped with a variety of TT insert techniques on heat transfer enhancement. They showed that multiple TT inserts better heat transfer enhancement as compared other single TT insert HET. Kongkaitpaiboon *et al.* [19] experimentally investigated the influences of the PCR on the turbulent convective  $Nu_{TT}$ , and  $\eta_p$ . Promvonge *et al.* [20] investigated the devices consisted of the TT inserts with constant or cyclically changing pitch ratio,  $H_{TT}$ , of the wire coil inserts.

Zhang *et al.* [21] performed a numerical analysis of 3-D turbulence stream to study  $Nu_{TT}$  and fluid-flow characteristics for helical screw tape inserts without core rod inserts. Shababian *et al.* [22] performed an experimental and computational analysis to study  $f_{rs}$ ,  $Nu_{rs}$  and  $\eta_{rs}$  characteristics of an air cooled HET fitted with three different types of tape inserts. These inserts included classic, butterfly and jagged TT. Krishna *et al.* [23] investigate various  $Nu_{TT}$  enhancement techniques. They investigated that the heat enhancement in helical and left-right TT collectors was better than the plain circular tube collector. Eiamsa-ard *et al.* [24] carried out a comparative experimental study of  $Nu_{TT}$ ,  $f_{TT}$ , and  $\eta_{rs}$  factor in a HET fitted with regularly spaced TT inserts. Jaisankar *et al.* [25] experimentally investigated the performance of  $Nu_{TT}$ ,  $f_{TT}$ , and  $\eta_p$  characteristics of solar heater water tube equipped with TT inserts with different  $y_{TT}$ . Jaisankar *et al.* [26] performed experimental study to investigate the behaviour of  $Nu_{TT}$ ,  $f_{TT}$  and  $\eta_p$  for thermosyphon solar water heating system equipped with helical and left-right TT.

Eiamsa-ard and Promvonge [27] investigated  $Nu_{TT}$  and  $f_{TT}$  characteristics for turbulent flow rate through a HET equipped with straight tape with double sided delta wings inserts and  $T-W$  with alternate axis. Seemawute and Eiasma-ard [28] carried out an experimental investigation to study the behaviour of  $h_{TT}$  characteristics for turbulent flow through a circular tube with peripherally-cut TT inserts with an alternate axis. Eiamsa-ard *et al.* [29] carried out comparative experimental study on  $Nu_{TT}$  enhancement for a round tube equipped with single TT inserts, full length dual and regularly spaced dual TT inserts under uniform wall heat flux conditions. Murugesan *et al.* [30] carried out an experimental analysis to study the behaviour of  $h_{TT}$ ,  $\eta_p$  factor and  $f_{TT}$  characteristics in a plain circular tube and circular tube with V-cut TT inserts.

It has been seen that no study is available in which effect of wing with combined solid ring TT inserts circular HET has been investigated. In the present investigation, it has

been planned to experimentally study the effect of variation in  $N_{TT}$  of circular HET. With the focus on circular HET, the  $Re_{TT}$  ranging from 3000-21000 is selected. The effect of number of TT inserts on thermal and hydrodynamic performance is experimentally studied. The optimum value of number of TT inserts circular heat exchanger parameters have been determined and discussed.

### Twisted tape geometry and parameters range

Wings with combination of solid ring TT inserts HET are tested and number of TT inserts are compared in the experimental work. The geometrical dimensions of TT inserts HET are listed tab. 1 and figs. 1 and 2. The geometrical parameters for the HET with wings with combination solid ring TT inserts are diameter of tube,  $D_T$ , width of tape,  $W_T$ , pitch between wings,  $P_W$ , and wing depth,  $W_d$ . Dimensionless parameters expressed as rings pitch ratios,  $d_R/D_T$ , wing pitch ratios,  $P_W/W_T$ , and wing depth ratios,  $W_d/W_T$ .


**Table 1. Geometrical parameter with range**

Name of parameters	Range
$N_{TT}$	1.0-4.0
$d_R/D_T$	1.0
$P_W/W_T$	3.0
$W_d/W_T$	1.67
Re	3000-21000

### Experimental details

An experimental investigation is carried out by fabricating the setup as per the ASHARE standards. A GI Pipe of 68 mm outer and 65 mm inner diameter is used to fabricate the setup. The dimensions of different setup sections viz. entry, test and exit section are 2.5 m, 1.4 m, and 1.5 m, respectively. A 3 HP, centrifugal blower is attached to the exit section for suction of air through the test section. The test section is provided by uniform heat flux of 1000 W/m<sup>2</sup> with a heating element and Variac transformer. The experimental set-up is equipped with sixteen thermocouples arranged in series, twelve for monitoring the temperature of tube wall and three for monitoring the variation of fluid temperature of test section at inlet and outlet. A U-tube manometer is employed for monitoring the fluid-flow rate at the test section. Digital micro manometer with least count of 0.1 Pa·s was used for measuring the pressure drop across the test section. The solid rings and TT with square wing perforation are made up from 0.50 mm thickness aluminium sheet. The schematic of the experimental set-up and photographic view of multiple wings with combined solid ring TT inserts is shown in fig. 3.

The geometrical parameters under investigation are rings pitch ratios,  $d_R/D_T$  mm, wing pitch ratios,  $P_W/W_T$  mm, wing depth ratios,  $W_d/W_T$  mm, number of twisted tapes,  $N_{TT}$ , and ratio of inner diameter to tube diameter,  $d_R/D_T$  mm. The details of the investigated geometrical and flow parameters are depicted in the tab. 2.

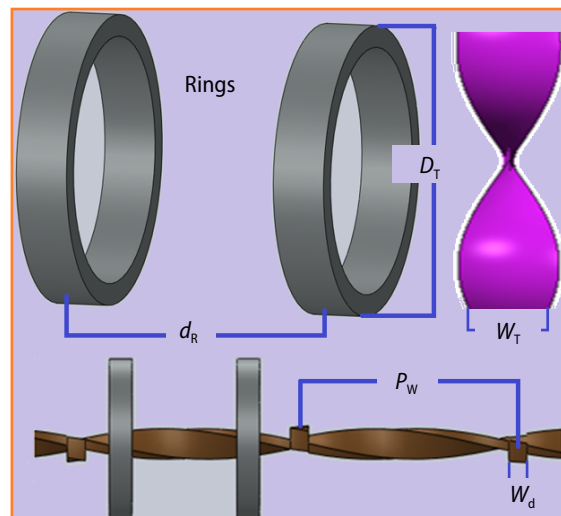

**Figure 1. Discuss square wings with combined solid rings twisted inserts HET parameters**

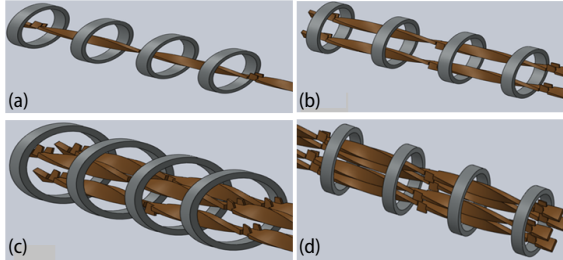


Figure 2. Schematic of TT with square wings with combined solid rings circular tube; (a) single TT, (b) double TT, (c) triple TT, and (d) multiple (four) TT

### Data reduction

The experimental data for heat exchanger was recorded under steady-state conditions for given heat flux and mass-flow rate of air. The heat transfer rate to air flowing in the tube was computed. Under the steady-state conditions of the experiment for given air mass-flow rate,  $\dot{m}$ , the heat transfer rate,  $Q_u$ , heat transfer coefficient,  $h_{TT}$ , Nusselt number,  $Nu_{TT}$ , and friction factor,  $f_{TT}$  have been calculated using the following equations.

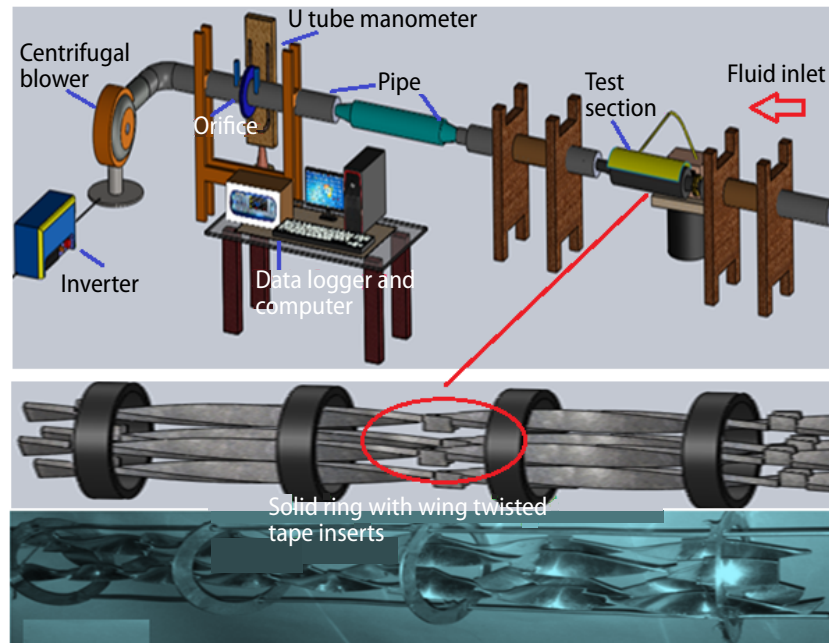


Figure 3. Schematic of experimental set-up and photo graphic view of multiple wings with combined solid ring TT inserts

The net local wall temperature,  $T_{TT}$ , inside the tube is the average temperature of all thermocouples embedded in the test section of experimental set-up:

$$T_{TT} = \frac{1}{12} \sum_{i=1}^{12} T_{c_i} \quad (1)$$

where  $Tb_{TT} = (T_i + T_o)/2$  is bulk mean temperature of fluid and it is calculated by equation.

The flow rate of mass of fluid is estimated by using the following equation [24, 29, 31]:

$$\dot{m} = C_d A_o \sqrt{\frac{2 \rho_{TT} (\Delta P)_0}{1 - \beta^4}} \quad (2)$$

where  $(\Delta P)_0 = 9.81(\Delta h_{TT}) \rho_{TT} \sin \theta$ .

The heat transfer coefficient of air mass fluid-flow in the test section is calculated using the following equation:

$$Q_u = \dot{m} C_p [T_o - T_i] \quad (3)$$

$$h_{TT} = \frac{Q_u}{A_0 (T_{TT} - T_{bTT})} \quad (4)$$

Nusselt number of air mass-flow in the test section is calculated from the equation:

$$Nu_{TT} = \frac{h_{TT} D_{TT}}{k_{TT}} \quad (5)$$

The velocity of air mass-flow in HET is calculated from the given equation:

$$V_{TT} = \frac{\dot{m}}{W_T H_{TT} \rho_{TT}} \quad (6)$$

The Reynolds number of air mass-flow in the HET is calculated from equation:

$$Re_{TT} = \frac{V_{TT} D_{TT} \rho_{TT}}{\mu_{TT}} \quad (7)$$

The friction factor of air mass-flow in test section of HET is calculated from pressure drop equation as:

$$f_{TT} = \frac{2(\Delta P)_d D_{TT}}{4\rho_{TT} L V_{TT}^2} \quad (8)$$

where  $(\Delta P)_d = 9.81(\Delta h_{TT})_d \rho_{TT}$ .

The thermal and the hydraulic performance of air mass-flow in a multiple square wing TT inserts is compared with plain tube by using the equation:

$$\eta_p = \frac{Nu_{TT}}{Nu_{ss}} \left( \frac{f_{TT}}{f_{ss}} \right)^{1/3} \quad (9)$$

## Uncertainties analysis

An uncertainty analysis for estimation of errors involved in experimental data measurement has been carried out. The uncertainty is estimated based on errors associated with measuring instruments [32]. The uncertainty results are presented in tab. 2.

## Validation of experimental results

Empirical correlations of Dittus-Boelter and Gnielinski equation for  $Nu_{TT}$  and Blasius equation with Petukhov correlation for  $f_{TT}$  were validated with experimental data for plain tube heat exchanger.

The standard equations to find the value of  $Nu_{TT}$  and  $f_{TT}$  for plain tube are given by Dittus-Boelter equation:

**Table 2. Range of uncertainty in the measurement of essential parameters**

Parameters	Error range [%]
Mass-flow rate	1.45-3.15
Heat gain	0.93-2.94
Heat transfer coefficient	1.56-3.54
Reynolds Number	0.78-1.56
Nusselt number	1.09-3.32
Friction Factor	0.78-1.67

$$\text{Nu}_{\text{TT}} = 0.023 \text{Re}^{0.8} \text{Pr}^{0.4} \quad \text{for } \text{Re} \geq 21000 \quad (10)$$

Blasius equation:

$$f_{\text{TT}} = 0.085 \text{Re}^{-0.25} \quad (11)$$

The standard equations to find the value of  $\text{Nu}_{\text{TT}}$  and  $f_{\text{TT}}$  for plain tube are given by Gnielinski equation:

$$\text{Nu}_{\text{TT}} = \frac{\left(\frac{f}{8}\right)(\text{Re}-1000) \text{Pr}}{1 + 12.7 \left(\frac{f_{\text{TT}}}{8}\right)^{\frac{1}{2}} \left(\text{Pr}_{\text{TT}}^{\frac{2}{3}} - 1\right)} \quad \text{for } 3000 \leq \text{Re} \leq 21000 \quad (12)$$

Petukhov equation:

$$f_{\text{TT}} = (0.079 \ln \text{Re} - 1.64)^{-2} \quad (13)$$

The standard values of  $\text{Nu}_{\text{TT}}$  and  $f_{\text{TT}}$  with respect to Reynolds number for plane HET are compared with the values obtained from experimental investigation and it is noticed that there is a logically good conformity between the three sets of values confirm the precision of the data collected from this experimental investigation as shown in the figs. 4(a) and 4(b).

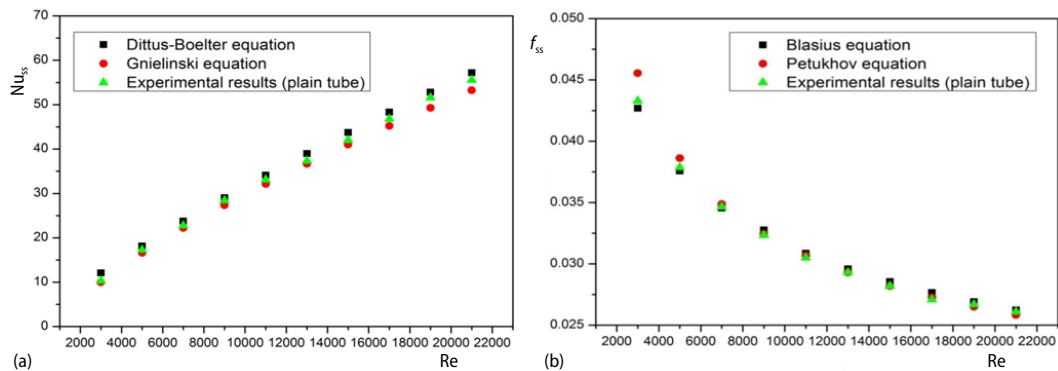


Figure 4. Comparison of present experimental results with previous correlations for; (a)  $\text{Nu}_{\text{TT}}$  and (b)  $f_{\text{TT}}$

## Results and discussion

In the present work the effects of HET with wings with combination of solid ring TT inserts with number of TT inserts and operating parameters on thermal and hydraulic performance are discussed.

### Heat and fluid-flow

The variation of  $\text{Nu}_{\text{TT}}$  with varied ranges of Reynolds number for plane tube and multiple wings with solid rings TT inserts is presented in fig. 5(a). The other geometrical parameters are fixed such as  $W_d/W_T = 0.167$ ,  $P_w/W_T = 3.0$ , and  $d_R/D_T = 1.0$ . It is shown that



there is a considerable enhancement of  $Nu_{TT}$  with the increase of Reynolds number for multiple wings with solid rings TT inserts as compare to plane tube. Inside the HET without any inserts, the radial velocity components of the flow generate boundary-layer separation. The boundary-layer effect can be minimized by introducing multiple wings with solid rings TT inserts in HET. The multiple wings with solid rings TT inserts induces swirl flow inside the tube which further enhances flow turbulence intensity and consequently generates high convection heat transfer than the plain tube. Thus, the value of  $Nu_{TT}$  is greater for higher swirling flow and found maximum for  $N_{TT} = 3.0$ .

Figure 5(b) shows the values of  $Nu_{TT}$  as function of  $N_{TT}$  for the selected Reynolds number values where a maximum in the values corresponding to a  $N_{TT} = 3.0$  for all Reynolds number. It can be observed that  $Nu_{TT}$  enhance significantly with the increase of number of multiple wings with solid rings TT inserts from  $N_{TT} = 1$  to  $N_{TT} = 3.0$  and then it starts decreasing with the increase of  $N_{TT}$ . When circular tube is fitted with multiple wings with solid rings TT inserts then it decreases the hydraulic diameter of the tube and increases the fluid-flow with generation of addition swirl flow. Hence, the swirl flow creates disturbance in between the particles of fluid and boundary-layers, hence the heat exchange between the core layer and tube wall continues for a longer period. The HET multiple wings with solid rings TT inserts, generates additional flow jets to the main flow streams through the wings and consequently accelerates the main flow streams. The value of  $Nu_{TT}$  attain maxima in a plot for  $N_{TT} = 3.0$  with respect to the prescribed range of  $Re_{TT}$ . In general, the multiple twisted tapes yield higher heat transfer rate than the single one around 10% to 15%. This improvement in  $Nu_{TT}$  for constant value of  $W_d/W_T = 0.167$ ,  $P_w/W_T = 3.0$ , and  $d_R/D_T = 1.0$  is around 10% to 15% for  $N_{TT} = 1$ , 15% to 20% for  $N_{TT} = 2$ , and around 18% to 25% for  $N_{TT} = 3.0$  is higher than that of plane tube.

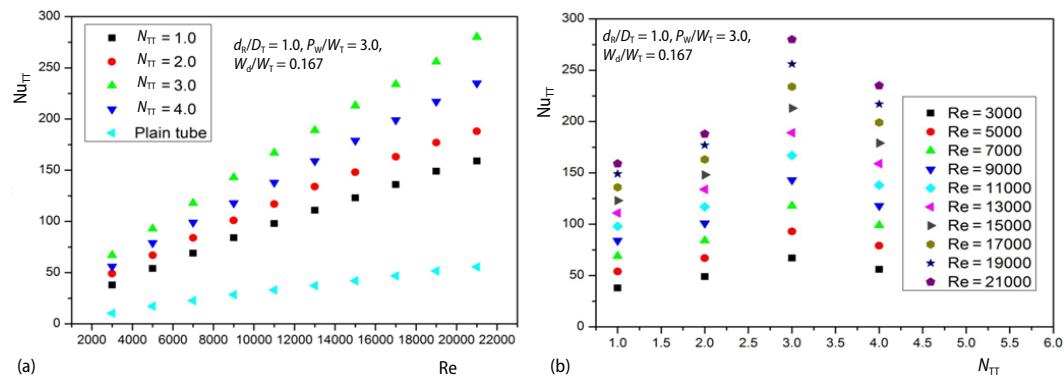


Figure 5. (a) Variation of  $Nu_{TT}$  with  $Re_{TT}$  for different values of  $N_{TT}$  (b) variation of  $Nu_{TT}$  with  $N_{TT}$  for different values of  $Re_{TT}$

The variation of  $f_{TT}$  with  $Re_{TT}$  for fixed range of  $W_d/W_T = 0.167$ ,  $P_w/W_T = 3.0$ , and  $d_R/D_T = 1.0$  with various  $N_{TT}$  is shown in the fig. 6(a). The TT inserts generate swirl flow which further increase the wetted surface area and dissipation of fluid pressure near the tube wall. Owing to this effect the fluid-flow has high pressure loss in the HET equipped with multiple wings with solid rings TT inserts. Figure 6(a) shows that the value of friction factor  $f_{TT}$  decreases with increasing value of Reynolds number. When the intensity of fluid-flow increases gradually then it would increase the heat flow for all wings TT inserts and it higher for  $N_{TT} = 4.0$ , Figure 6(b) shows the values of  $f_{TT}$  as function of  $N_{TT}$  for the selected Reynolds number values where a maxima in the values corresponding to a  $N_{TT} = 4.0$  for all Reynolds number.

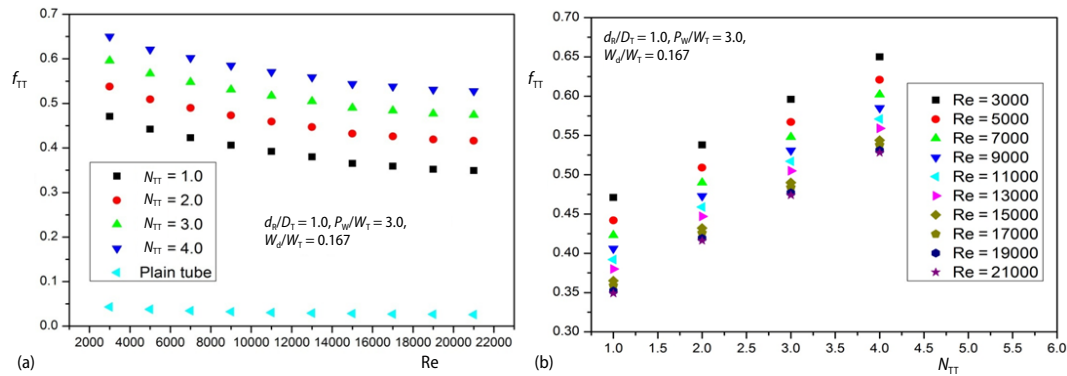


Figure 6. (a) Variation of  $f_{TT}$  with  $Re_{TT}$  for different values of  $N_{TT}$ , (b) variation of  $f_{TT}$  with  $N_{TT}$  for different values of  $Re_{TT}$

#### Thermal hydraulic performance

The heat transfer in multiple wings with solid rings TT inserts is better than the plain tube. The effectiveness of TT inserts is measured by using thermal hydraulic parameter  $\eta_p$  [31, 33-35] in terms of  $Nu_{TT}$  and  $f_{TT}$ . In this investigation the value of these parameters for multiple wings with solid rings TT inserts is investigated and plotted in fig. 7. It is investigated that the multiple wings with solid rings TT inserts generate extra tangential flow which further increases the contact area and hydraulic length of flowing fluid.

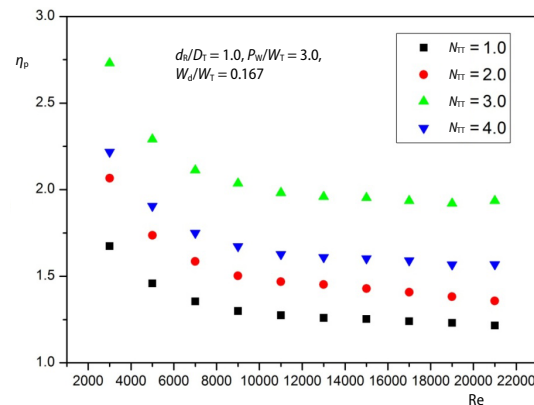


Figure 7. Variation of  $\eta_p$  with  $Re_{TT}$  for different values of  $N_{TT}$

= 1.0 for all prescribed range of Reynolds number, it can be seen from the graph that the maximum value of thermal hydraulic performance parameter  $\eta_p = 2.75$  with respect to  $Re_{TT} = 2000$  is observed for HET equipped with  $N_{TT} = 3.0$  and it is also observed that the value of  $\eta_p$  decreases with the increase of  $Re_{TT}$  from 2000 to 21000. Table 3 shows the values of thermal hydraulic performance determined for this geometry multiple wings with solid rings TT inserts have been compared with other similar TT inserts. It can be seen that the multiple wings with solid rings TT inserts results in the best thermal hydraulic performance.

#### Conclusions

In this article, experimental investigation is carried out to study the turbulent heat transfer and fluid-flow characteristics in circular HET using wings with combination of solid ring TT inserts. A series of experiments has been performed with the range of Reynolds numbers,  $Re_{TT}$ , varied from 3000 to 21000, number of twisted taped inserts,  $N_{TT}$  varied from 1.0 to 4.0 with constant value of other TT parameters such as rings pitch ratio,  $d_R/D_T = 1.0$ , wing



**Table 3. Comparative study of previous investigations**

Investigator	The TT shapes	Maximum value of
[18]	Solid ring with multiple TT	2.03
[19]	Perforated conical-ring	1.65
[20]	Non-uniform wire coil combined with TT	1.29
[21]	Helical screw tape	1.75
[22]	Classic, Jagged and Butterfly with inclined angle of 90° TT	1.54
[23]	Jagged TT	1.12
[24]	Regularly spaced TT	1.18
[25]	Left-Right inserts of twist with various spacer length.	1.51
[26]	The TT geometry with twist ratio 3.0 (helical, left-right).	1.49
[27]	Helical screw-tape inserts.	1.43
[28]	Peripherally-cut TT with an alternate axis.	1.31
[29]	Dual TT	1.88
[30]	V-cut TT insert	1.71
Present study	Multiple square wings with solid rings	2.75

pitch ratio,  $P_w/W_T = 3.0$ , and wing depth ratio  $W_d/W_T = 1.67$ . Based on the examined, turbulent heat transfer and fluid-flow in wing with combined solid ring TT inserts results are compared with plain circular tube under same operating conditions. The main findings of this paper are as follows.

- The turbulent heat transfer and friction factor of the circular HET are strong function of number of TT inserts,  $N_{TT}$ . The maximum enhancement in the turbulent heat transfer has been found to be 5.66 times over the plain tube corresponds to  $N_{TT} = 3.0$ .
- A significant enhancement in the value of the thermal hydrodynamic performance has been found. The value of the thermal and hydrodynamic performance varies between 1.29 and 2.74 for the range of operating parameters investigated.
- The thermal and hydrodynamic performance parameter based on equal pumping power,  $\eta_p$  was found to be highest for  $N_{TT} = 3.0$ . The optimum value of thermal and hydrodynamic performance has been found to be 2.74 for Reynolds number of 3000 within the range of the parameters investigated.
- Multiple wings with solid rings TT inserts has also been shown to be thermal as well as hydraulic better in comparison to other similar TT insert geometries.

### Nomenclature

$A$	– convection heat transfer area of channel, [m <sup>2</sup> ]	$L$	– length of tube, [m]
$C_d$	– coefficient of discharge	$\dot{m}$	– mass-flow rate of air, [kg s <sup>-1</sup> ]
$C_p$	– specific heat capacity of air, [J kg <sup>-1</sup> K <sup>-1</sup> ]	$N_{TT}$	– number of twisted tape
$D_T$	– diameter of tube, [m]	$Nu_{TT}$	– Nusselt number, [–]
$d_R/D_T$	– rings pitch ratios, [–]	$P_w$	– pitch between wings, [m]
$f_{TT}$	– friction factor	$Pr_{TT}$	– Prandtl number
$H_{TT}$	– head difference, [m]	$\Delta P$	– pressure drop, [Pa]
$h_{TT}$	– heat transfer rate coefficient, [W m <sup>-2</sup> K <sup>-1</sup> ]	$Re$	– Reynolds number, [–]
$k$	– thermal conductivity of air, [W m <sup>-1</sup> K <sup>-1</sup> ]	$T_i$	– inlet temperature, [K]
		$T_o$	– outlet temperature, [K]

$P_w/W_T$  – wing pitch ratios, [–]  
 $W_T$  – width of tape, [m]  
 $W_d$  – wings depth, [m]  
 $W_d/W_T$  – wing depth ratios, [–]

#### Greek symbols

$\beta$  – ratio of orifice diameter to pipe diameter, [–]

$\eta_p$  – performance evaluation factor  
 $\rho_{TT}$  – density, [kgm<sup>-3</sup>]

#### Acronyms

HET – heat exchanger tube  
 TT – twisted tape

## References

- [1] Arulprakasajothi, M., et al., Performance Study of Conical Strip Inserts in Tube Heat Exchanger Using Water-Based Titanium Oxide Nanofluid, *Thermal Science*, 22 (2016), 1B, pp. 477-485
- [2] Suri, A. R. S., et al., Experimental Investigation of Heat Transfer and Fluid Flow Behaviour in Multiple Square Perforated Twisted Tape with Square Wing Inserts Heat Exchanger Tube, *Heat and Mass Transfer*, 54 (2019), 6, pp. 1813-1826
- [3] Fard, M. H., et al., Numerical and Experimental Investigation of Heat Transfer of ZnO/Water Nanofluid in the Concentric Tube and Plate Heat Exchangers, *Thermal Science*, 15 (2011), 1, pp. 183-194
- [4] Bhardwaj, A. K., et al., Experimental Study on Heat Transfer and Fluid Flow Enhancement of a Spherical Shape Obstacle Solar Air Passage, *Thermal Science*, 23 (2019), 2A, pp. 751-761
- [5] Hussein, A. M., et al., Heat Transfer Enhancement with Elliptical Tube under Turbulent Flow TiO<sub>2</sub>-Water Nanofluid, *Thermal Science*, 20 (2016), 1, pp. 89-97
- [6] Kumar, R., et al., Experimental Investigation on Overall Thermal Performance of Fluid Flow in a Rectangular Channel with Discrete V-Pattern Baffle, *Thermal Science*, 22 (2018), 1A, pp. 183-191
- [7] Djordjević, M. Ll., et al., Pressure Drop and Stability of Flow in Archimedean Spiral Tube with Transverse Corrugations, *Thermal Science*, 20 (2016), 2, pp. 579-591
- [8] Purandare, P. S., et al., Experimental Investigation on Heat Transfer and Pressure Drop of Conical Coil Heat Exchanger, *Thermal Science*, 20 (2016), 6, pp. 2087-2099
- [9] Kumar, A., et al., Numerical and Experimental Investigation of Enhancement of Heat Transfer in Dimpled Rib Heat Exchanger Tube, *Heat and Mass Transfer*, 53 (2017), 12, pp. 3501-3516
- [10] Suri, A. R. S., et al., Effect of Square Wings in Multiple Square Perforated Twisted Tapes on Fluid Flow and Heat Transfer of Heat Exchanger Tube, *Case Studies in Thermal Engineering*, 10 (2017), Sept., pp. 28-43
- [11] Kumar, A., et al., Effect of Roughness width Ratio in Discrete Multi V-Shaped Rib Roughness on Thermo-Hydraulic Performance of Solar Air Heater, *Heat and Mass Transfer*, 51 (2015), 2, pp. 209-220
- [12] Kumar, A., Kim, M. H., Heat Transfer and Fluid Flow Characteristics in Air Duct with Various V-Pattern Rib Roughness's on the Heated Plate: A Comparative Study, *Energy*, 103 (2016), May, pp. 75-85
- [13] Kumar, A., et al., Numerical Optimization of Thermal Performance of a Solar Air Channel Having Discrete Multi V-Rib Roughness on Absorber Plate, *Heat Transfer Research*, 47 (2016), 5, pp. 449-469
- [14] Akhavan-Behabadi, M. A., et al., Pressure Drop and Heat Transfer Augmentation Due to Coiled Wire Inserts During Laminar Flow of Oil Inside a Horizontal Tube, *International Journal of Thermal Sciences*, 49 (2010), 2, pp. 373-379
- [15] Meng, J., et al., Field Synergy Optimization and Enhanced Heat Transfer by Multi-Longitudinal Vortexes Flow in Tube, *International Journal of Heat and Mass Transfer*, 48 (2005), 16, pp. 3331-3337
- [16] Gawandare, A. V., et al., Heat Transfer Enhancement with Different Square Jagged Twisted Tapes, *Int. J. Eng. Res App*, 4 (2014), 3, pp. 619-624
- [17] Al-Fahed, S., et al., Pressure Drop and Heat Transfer Comparison for both Micro Fin Tube and Twisted Tape Inserts in Laminar Flow, *Exp. Therm. Fluid Sci.*, 18 (1999), 4, pp. 323-333
- [18] Suri, A. R. S., et al., Convective Heat Transfer Enhancement Techniques of Heat Exchanger Tubes: A Review, *Int. J. of Ambient Energy*, 39 (2018), 7, pp. 649-670
- [19] Kongkaitpaiboon, V., et al., Experimental Investigation of Heat Transfer and Turbulent Flow Friction in a Tube Fitted with Perforated Conical-Rings, *International Communications in Heat and Mass Transfer*, 37 (2010), 5, pp. 560-567
- [20] Promvonge, P., Thermal Augmentation in Circular Tube with Twisted Tape and Wire Coil Turbulators, *Energy Conversion and Management*, 49 (2008), 11, pp. 2949-2955
- [21] Zhang, X., et al., Numerical Studies on Heat Transfer and Friction Factor Characteristics of a Tube Fitted with Helical Screw Tape without Core Rod Inserts, *Int. J. Heat and Mass Transfer*, 60 (2013), May, pp. 490-498

- [22] Shabanian, S. R., *et al.*, CFD and Experimental Studies on Heat Transfer Enhancement in an Air Cooler Equipped with Different Tube Inserts, *Int. Commun. Heat Mass Transfer*, 38 (2011), 3, pp. 383-390
- [23] Krishna, S. R., *et al.*, Studies on Heat Transfer Augmentation in a Circular Tube Fitted with Straight Half Twist Left–Right Inserts in Laminar Flow, *Journal of Environmental Research and Development*, 3 (2008), 3, pp. 437–441
- [24] Eiamsa-ard, S., *et al.*, Experimental Investigation of Heat Transfer and Flow Friction in a Circular Tube Fitted with Regularly Spaced Twisted Tape Elements, *Int. Commun. Heat Mass Transfer*, 33 (2006), 10, pp. 1225-1233
- [25] Jaisankar, S., *et al.*, Experimental Studies on Heat Transfer and Friction Factor Characteristics of Thermosyphon Solar Water Heater System Fitted with Spacer at the Trailing Edge of Twisted Tapes, *Appl. Therm. Eng.*, 29 (2009), 5-6, pp. 1224-1231
- [26] Jaisankar, S., *et al.*, Experimental Studies on Heat Transfer and Thermal Performance Characteristics of Thermosyphon Solar Water Heating System with Helical and Left–Right Twisted Tapes, *Energy Converse Manag.*, 52 (2011), 5, pp. 2048-2055
- [27] Eiamsa-ard, S., Promvong, P., Influence of Double-Sided Delta-Wing Tape Insert with Alternate-Axes on Flow and Heat Transfer Characteristics in a Heat Exchanger Tube, *Chin. J. Chem. Eng.*, 9 (2011), 3, pp. 410-423
- [28] Seemawute, P., Eiamsa-ard, S., Thermo Hydraulics of Turbulent Flow through a Round Tube by a Peripherally-Cut Twisted Tape with an Alternate Axis, *Int. Commun. Heat Mass Transfer*, 37 (2010), 6, pp. 652-659
- [29] Eiamsa-ard, S., *et al.*, Thermal Characteristics in a Heat Exchanger Tube Fitted with Dual Twisted Tape Elements in Tandem, *Int. Commun. Heat Mass Transfer*, 37 (2010), 1, pp. 39-46
- [30] Murugesan, P., *et al.*, Heat Transfer and Pressure Drop Characteristics in a Circular Tube Fitted with and without V-Cut Twisted Tape Insert, *Int. Commun. Heat Mass Transfer*, 38 (2011), 3, pp. 329-334
- [31] Suri, A. R. S., *et al.*, Heat Transfer Enhancement of Heat Exchanger Tube with Multiple Square Perforated Twisted Tape Inserts: Experimental Investigation and Correlation Development, *Chemical Engineering and Processing: Process Intensification*, 116 (2017), June, pp. 76-96
- [32] Klein, S. J., Clintock, A. Mc., Description Uncertainties in Single Sample Experiments, *Mechanical Engineering*, 75 (1953), pp. 3-8
- [33] Kumar, S., *et al.*, Turbulent Heat Transfer and Nanofluid Flow in a Protruded Ribbed Square Passage, *Results in Physics*, Elsevier Science, 7 (2017), Sept., pp. 3603-3618
- [34] Suri, A. R. S., *et al.*, Experimental Determination of Enhancement of Heat Transfer in a Multiple Square Perforated Twisted Tape Inserts Heat Exchanger Tube, *Experimental Heat Transfer*, 31 (2018), 2, pp. 85-105
- [35] Webb, R., Performance Evaluation Criteria for Use of Enhanced Heat Transfer Surfaces in Heat Exchanger Design, *International Journal of Heat and Mass Transfer*, 24 (1981), 4, pp. 715-726