

# INFLUENCE OF HYDROGEN AS A FUEL ADDITIVE ON COMBUSTION AND EMISSIONS CHARACTERISTICS OF A FREE PISTON ENGINE

*Mohammad Alrbai\*<sup>1</sup>, Bashar R. Qawasmeh<sup>1</sup>, Sameer Al-Dahidi<sup>2</sup>, Osama Ayadi<sup>1</sup>*

<sup>1</sup> Department of Mechanical Engineering, University of Jordan, Amman, Jordan 11942

<sup>2</sup> Mechanical and Maintenance Engineering department, German Jordanian University, Amman, Jordan 11180

\* Corresponding author; E-mail: [m.alrbai@ju.edu.jo](mailto:m.alrbai@ju.edu.jo)

## *Abstract*

*It has been shown that using fuel additives play an important role in enhancing the combustion characteristics in terms of efficiency and emissions. In addition, free piston engines have shown capable in reducing energy losses and presenting more efficient and reliable engines. In this context, the objective of the present work is to investigate the effect of using Hydrogen as a fuel additive in natural gas HCCI free piston engine. To this aim, two models have been iteratively coupled: 1) the combustion model that is used to calculate the heat release of the combustion and 2) the scavenging model that is employed to determine the in-cylinder mixture state after scavenging in terms of its homogeneity and species mass fractions and to obtain the final pressure and temperature of the in-cylinder mixture. In the former model, the 0-D approach through Cantera toolkit has been considered due to the fact that HCCI combustion is very rapid and the fuel-air mixture is well-homogenous, whereas in the latter model, 3D-CFD approach through Ansys fluent software is considered to ensure precise calculations of the species exchange at the end of each engine cycle. The effect of Hydrogen as a fuel additive has been quantified in terms of the combustion characteristics (e.g., ignition delay, heat release rate, engine overall efficiency and emissions, etc.). It has been shown that hydrogen addition reduces ignition delay time, decreases the in-cylinder peak pressure, while allowing the engine to operate with higher mechanical efficiency as it has high heat release rate, increases the NOx emission levels of the engine, but decreases the carbon monoxide (CO) levels*

*Keywords: Hydrogen; Free piston engine; HCCI combustion; Emission; Mixture homogeneity; 3D scavenging.*

## **1. Introduction**

In the last few decades, a great development in energy saving and conversion fields including the improvements and modifications of internal combustion (IC) engines, has been shown. Looking for high efficiency and low emissions in IC engines emphasize many researchers to look for more reliable and efficient engine configurations than those of conventional engines. In this regard, free piston engines are among the modifications that aim to reduce energy losses and present more efficient and reliable engines. The absence of the complicated parts, such as the crankshaft, allows free piston engines to work with less frictional losses compared to conventional engines [1]. Free piston engines can operate on variable compression ratio due to the fact that the piston motion is not restricted along the

piston stroke ends. This increases the applicable fuels which can be used in the engine and allows employing different ignition modes [2]. Free piston engines and conventional engines are extremely different in terms of piston motion profile [3]. The expansion stroke in the free-piston engine is much faster than this of conventional engine where piston motion is restricted by the crankshaft motion. Also, the piston motion in conventional engines during the one cycle cannot be changed due to the high system inertia. However, in free-piston engines, the piston motion profile is proportional to the instantaneous forces resultant over the piston. This makes the combustion process, presented by the pressure force, is the dominant factor which influences the speed of expansion stroke. A further consequence of this is that the piston motion profile may differ between different operating conditions [2]. One advantage of the fast expansion stroke in the free-piston engine is the reduction in heat losses during the stroke and, therefore, the formation of temperature-dependent emissions is reduced.

The above-mentioned features of free piston engines are extremely desired when HCCI combustion is employed. In HCCI engines, the combustion is completely controlled by the chemical kinetics of the fuel-air species. In fact, the ignition occurs when the fuel-air mixture reaches the auto-ignition temperature, which achieved by the effect of compressive heating [4]. In addition, the nature of combustion is lean and with relatively low heat release rates due to the presence of excess air [4]. The interest in HCCI combustion is based on the fact that this type of combustion has low emissions when compared to other combustion types. Also, the nature of HCCI combustion extends the fuel operation range of the engine where fuels like gasoline and diesel can be used [4, 5]. Therefore, by presenting HCCI combustion in free piston engines, it is expected to observe higher efficiency and low emissions, especially when appropriate control of the process is applied.

To move toward cleaner and efficient energy producing methods, fuel additives have been considered as one of the effective ways used for enhancing the combustion characteristics in terms of both efficiency and emissions. Natural Gas (NG) is one of the suitable fuels for IC engines operation due to its affordable prices and reasonable heating values, but it has many limitations when compared to other fossil fuels. For instance, low combustion efficiency and narrow flame propagation are examples of natural gas combustion limitations [6].

One effective method that is used to enhance the performance of natural gas engines is using hydrogen ( $H_2$ ) as a fuel additive. Hydrogen combustion is clean and produces no emissions, except nitrogen oxides. In addition, hydrogen combustion includes fast flame velocity and low ignition energy, which extend the operational limits of the engine and increase its efficiency [7]. Hydrogen also allows the engine to run at relatively lean conditions and therefore, achieving high engine efficiency and low emissions [8].

The present work discusses the effect of using Hydrogen as a fuel additive particularly in HCCI free piston engine fueled originally with NG. Different combustion characteristics, such as ignition delay and heat release rate, have been investigated. Also, engine overall efficiency and emissions outcomes have been considered in the study.

## **1.1. Review of literature:**

By reviewing the literature, it was noted that few studies focused on investigating the hydrogen addition on HCCI engines performance and none of them considered its effect on free piston engines. However, some studies focused on studying the addition of Hydrogen in conventional crankshaft engines as this done by Yab et al. [9] In their study, Yab et al found that hydrogen addition promotes engine stability and lowers the required intake temperature of combustion. The experimental results also showed that hydrogen addition reduce  $\text{NO}_x$  levels, especially at low engine loads.

Later on, Askari et al. [10] examined the influence of hydrogen addition on the performance of natural gas HCCI engine. Their study showed that hydrogen addition by different percentages can advance the combustion process and maximize the peak combustion temperature. In terms of emissions, Askari et al. found that  $\text{CO}$ ,  $\text{CO}_2$  and unburned HC decrease significantly, as hydrogen percentage increases.

After that, Guo and Neill [11] investigated the addition of hydrogen to n-heptane HCCI engine. The findings of their research came with the conclusion that hydrogen tetrads combustion phasing and reduce its duration. Also, hydrogen decreases unburned hydrocarbons (HC) levels, but at the same time a noticeable rise in  $\text{NO}_x$  emissions had been observed.

Another study by Hu et al. [12] analyzed the effect of hydrogen addition to dimethyl ether (DME) HCCI engine. The results in Hu et al. work indicated that hydrogen addition can delay the ignition timing of the fuel-air mixture, especially at high mixture temperatures (above 1000K).


Finally, Hammound et al. [13] concluded that hydrogen addition with a small fraction to methane fueled HCCI engine has a significant effect on the combustion phasing and can be a controlling parameter that maintain low emissions and peak cylinder pressure.

It was mentioned that piston motion in free piston engines is totally controlled by the combustion pressure force which by itself depends on the chemical reactions of the fuel species with air. Therefore, it is expected to observe variations in the performance of the free piston engine, especially in terms of its dynamics, when hydrogen is used as a fuel additive. For this reason, this study focuses on investigating the effect of hydrogen addition on the performance of the free piston engine, particularly. In fact, this investigation could help in understanding the relation between engine dynamics and thermodynamics which plays a significant role in achieving an optimal engine operation.

## **2. Methodology and Model**

In this study, a single cylinder two stroke engine has been modeled using MATLAB<sup>®</sup>, Cantera toolkit and Ansys Fluent<sup>®</sup>. The model includes linear spring that works as energy storing device to return the piston during the compression stroke. The model also includes, electrical generator that converts the linear motion of the piston to electrical power by moving coil against permanent magnets. The loading force applied through the electrical generator on the engine is designed to be variable through the engine cycles. Figure 1 describes different kind of forces that have been considered in the engine model including, spring force ( $F_s$ ), gravity force ( $F_g$ ), friction force ( $F_f$ ), generator force ( $F_e$ ) and pressure force ( $F_p$ ). The pressure force,  $F_p$ , is the result of fuel-air combustion process which causes rapid increasing in the in-cylinder pressure and therefore causes the piston to move down along

the power stroke. The pressure force depends on the fuel-air ratio and the nature of combustion process, i.e., it is a function of the fuel-air chemical kinetics, which describes the nature of HCCI combustion. On the other hand, the generator force,  $F_e$ , is working against the pressure force by absorbing the kinetics energy of the moving piston. This force depends on piston position ( $x$ ), strength of magnetic field and coil turns number and diameter. The generator force can be changed to sustain the steady state operation. In this study, it has been considered as shown in Eq. (1).

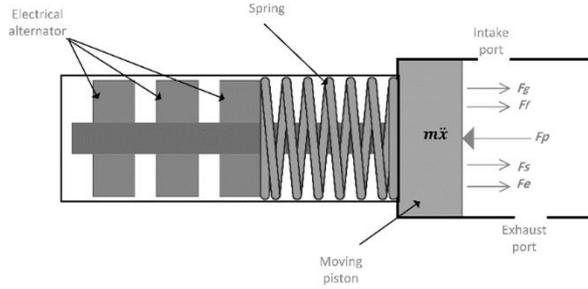

**Figure 1: Free piston engine model**

## 2.1. Combustion Model

In this model, Cantera toolkit [14] has been employed to calculate the heat release rate of the combustion process. The GRI-Mech 3.0 [15] has been used to consider the fuel-air species reactions. GRI-Mech 3.0 incorporates 53 species and 325 reactions and can demonstrate adequately hydrogen and natural gas reactions in terms of HCCI combustion. The mechanism calculates  $\text{NO}_x$  and CO emission by considering their species and reactions which allowed the current study to investigate briefly the effect of hydrogen addition on the engine emissions. One-dimensional approach has been considered to simulate the species reactions, due to the nature of HCCI ignition which assumes that all in-cylinder gas mixture is in well-homogenous state and the ignition happens everywhere, in a very rapid manner.

The engine model parameters are reported in Table 1 and the mathematical representations of all forces acting on the piston are presented in Eq. (1) – Eq. (5):

$$F_e = -C_g \cdot \dot{x} \cdot \text{sign}(\dot{x}) \quad (1)$$

$$F_p = A_p \cdot P \quad (2)$$

$$F_f = -\beta \cdot \dot{x} \cdot \text{sign}(\dot{x}) \quad (3)$$

$$F_g = m \cdot g \quad (4)$$

$$F_s = k \cdot (x - x_s) \quad (5)$$

**Table 1: Engine parameters**

Parameter	Symbol	Value
Bore	<b>B</b>	28 mm
Maximum stroke	<b>S<sub>max</sub></b>	51 mm
Exhaust port height	<b>X<sub>Ex</sub></b>	16.2 mm
Intake port height	<b>X<sub>In</sub></b>	12.2 mm
Piston mass	<b>m</b>	0.385 kg
Spring stiffness	<b>k</b>	245 N/m
Spring free location	$x_s$	0.02 m
Engine speed	$\omega$	125 Hz (7500 rpm)

Where  $P$  is the instantaneous in-cylinder pressure,  $A_p$  is the piston area,  $g$  is the gravity acceleration,  $\beta$  is the combined friction coefficient which considers both static and the viscous friction forces as mentioned in [16],  $C_g$  is the generator load coefficient,  $k$  and  $x_s$  are the spring stiffness and the spring free length respectively.

The resultant of the mentioned forces that causes piston acceleration is shown in Eq. (6), where  $m$  is piston mass and  $\ddot{x}$  is the piston acceleration.

$$m\ddot{x} = \Sigma F \quad (6)$$

To solve for piston acceleration, the first law of thermodynamics and the ideal gas law are solved for each piston position using finite difference as a numerical method, as shown in Eq. (7) and Eq. (8), respectively:

$$m_g \frac{du}{dt} = \frac{dQ_{comb}}{dt} - P \frac{dV}{dt} - \frac{dQ_{loss}}{dt} \quad (7)$$

$$V \frac{dP}{dt} + P \frac{dV}{dt} = m_g R \frac{dT}{dt} \quad (8)$$

where  $m_g$  is the in-cylinder gas mixture mass,  $u$  is the specific internal energy,  $V$  is the in-cylinder volume,  $Q_{loss}$  and  $Q_{comb}$  are the heat loss by engine cylinder and the heat released by combustion, respectively. The heat transfer from the engine is found using a modified version of Woschini's correlation [17] as stated in Eq. (9) and Eq. (10):

$$h = 3.26 \cdot B^{-0.2} P^{0.8} T^{-0.55} V_p^{0.8} \quad (9)$$


$$\dot{Q}_{loss} = h \cdot A_{wall} \cdot (T - T_{wall}) \quad (10)$$

where  $h$  is the heat transfer coefficient,  $T$  and  $T_{wall}$  are the in-cylinder instantaneous and wall temperatures, respectively,  $V$  is the instantaneous volume,  $A_{wall}$  is the instantaneous surface area of the cylinder, the average piston speed is  $V_p$ , which is empirically correlated to the gas mixture velocity inside the combustion chamber.

## 2.2. Scavenging Model

By the end of the expansion stroke, the scavenging model starts so the gas exchange process between the fresh charge and the in-cylinder residual gases is modeled.

3D engine model as this in Figure 2 has been used to simulate the scavenging process using CFD analysis. The aim of this model is to determine the in-cylinder mixture state after scavenging in terms of its homogeneity and species mass fractions. Using Ansys fluent® software, the percentage of the remaining residual gas can be found, this is necessary in the combustion model where residual gases can play significant role in defining different combustion phases such as maximum peak pressure and temperature. In addition, in the scavenging model; the final pressure and temperature of the in-cylinder mixture can be obtained. As HCCI combustion is influenced by the self-ignition conditions of the fuel-air mixture, the initial pressure and temperature can affect the ignition significantly and therefore overall piston dynamics. The complex gas exchange process that happens during scavenging requires employing the 3D approach in order to simulate the process precisely as many factors should be included such as species thermal and mass diffusion and the effect of flow swirling. Such factors cannot be modeled using the 0D approach as they depend not only on time but also on the geometry of the engine and the location of its inlet and exhaust ports.

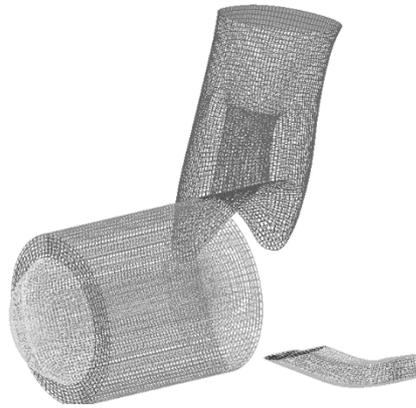

**Figure 2: 3D-CFD mesh of the scavenging model**

The engine mesh which has been used in the scavenging simulation is shown in Figure 2. A total number of 129,141 is the number of cells that have been considered where 106,597 of them are of HEXA\_8 type and 22,544 are QUAD\_4 cells. Sum mesh configuration minimize and limit cell distortion and numerical instabilities during the process calculations. The cells that consist the piston part in the mesh configuration move along the stroke length through the layering technique implemented in Ansys Fluent ® menu. A user defined function (UDF) has been employed to describe the piston motion profile and different engine parameters like the fuel-air mass fraction and the in-cylinder intake pressure and temperature have been also entered. To model the gas turbulence and the species transport during the scavenging simulation, K-ε and species transport models have been used. To be more convenient, equivalent crank angle (ECA) and equivalent speed (ES) notations is preferred in describing engine motion. Eq. (11) and Eq. (12) [18] show the conversion from time and frequency scales to crank angle and rotation speed scales, where  $t_0$  and  $t$  are the initial and instantons times, respectively, and  $f$  is the engine frequency.

$$ECA = 360 \cdot (t - t_0) \cdot f \quad (11)$$

$$ES = 60 \cdot f \quad (12)$$

### 3. Simulation Methodology

The solution process includes coupling both the combustion model and the scavenging model through an iterative process, where both models feed each other back and forth until a certain tolerance is obtained. In the combustion model, one-dimensional approach has been assumed due to the fact that the HCCI combustion is very rapid and the fuel-air mixture is well-homogenous, which is verified in the scavenging model. However, the scavenging model has been simulated using 3D-CFD approach to ensure precise calculations of the species exchange at the end of each engine cycle. The simulation procedure starts by feeding the combustion model with fuel and air mass fractions, which always maintain constant equivalence ratio ( $\phi = 0.35$ ). Other initial conditions like intake pressure and temperature, initial piston position and velocity are also included. The combustion model solves for the fuel-air combustion products and for the pressure and temperature profiles. Once the exhaust port is opened, the scavenging model starts and it continues until the same port get closed. By the end of the scavenging process, the resulted in-cylinder species mass fractions, pressure and temperature are fed again into the combustion model. The same process will continue, again, until the difference between the new and the old outputs (i.e., mass fractions, pressure and temperature) of each cycle are within a tolerance of  $10^{-8}$ . The final pressure profile is, then, used to find the pressure force and other forces along the engine cycle. New piston position, velocity and acceleration are obtained and inserted back to the combustion model to start a new engine cycle or to restart the cycle if the difference between the new piston position and the old one is greater than a certain tolerance ( $10^{-8}$ ).

### 4. Results and Discussions

The investigations in this study have been performed by studying the hydrogen addition in different percentages to the natural gas-air mixture and modeling the engine cycle for the resulted mixture. Different combustion phases, like combustion peak pressure and temperature, have been compared at different H<sub>2</sub>-NG ratios. Engine power, efficiency and emissions have been discussed as well, briefly.

In order to validate the current model, the study results have been compared to other results published by Sandia National Labs SNL [19]. The results agreed when two cases that includes pure natural gas and pure Hydrogen are assumed in this study model. The comparison between the current numerical results and SNL experimental results are reported in Table 2. The variations in the experimental results had been discussed by SNL people within the discussion section and they refer to operating temperature and compression ratio as the main reasons of such variations. In addition, a similar free piston engine model to current one has been validated and published in [20] for DME fuel with including EGR effect where the numerical results showed a very good agreement with the experimental data.


**Table 2: A comparison between the current model and SNL model.**

	Current Model		SNL model	
	CR	$\eta_{\text{Thermal}}(\%)$	CR	$\eta_{\text{Thermal}}(\%)$

Natural Gas ( $\phi=0.365$ , $T_{in}=340K$ )	37.19	48.7	30-54	50-55
Hydrogen ( $\phi=0.319$ , $T_{in}=340K$ )	21.8	41.4	17-50	40-55


A comparison between the free-piston engine motion profile and the conventional one is presented in Figure 3. Engine speed and intake air pressure and temperature, have been set identical in both engine models to ensure fair comparison. It is obvious that the free piston motion differs during both of compression and expansion strokes. In the case of the conventional engine, the profile looks axisymmetric around the TDC meaning that the engine piston spends the same time in its two strokes. However, by locating the TDC of the free piston engine profile, the expansion stroke seems shorter than the compression stroke. The short residence time around the TDC in the case of the free-piston engine cause the expansion stroke to be faster than in the case of the conventional engine where the piston is restricted by the crank rotation speed.

The variations between the piston motion profile between the free piston engine and the conventional engine will cause variations in the compression ratio and therefore variations in the pressure and temperature profile. Also, as HCCI ignition is controlled by primary by piston dynamics and the species chemical kinetics; the performance of the two-engine type is expected to vary significantly from each other when Hydrogen is added to the fuel-air mixture. The following discussion will consider the effect of hydrogen addition to the free piston performance. The results can be compared to those of the conventional engines with hydrogen addition mentioned in the literature review.

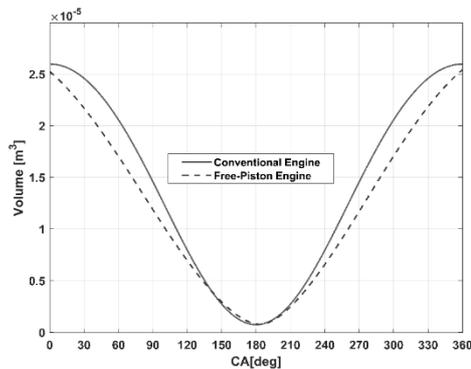


**Figure 3: In-cylinder volume profile (free piston engine vs. conventional engine)**

It was mentioned that free piston engines differ mainly from conventional engine in their piston dynamics nature, in Figure 4; the acceleration vs the velocity of the piston are presented at different Hydrogen addition ratios. The addition of hydrogen causes piston deceleration near the TDC the piston motion as the figure indicates where adding more Hydrogen will end with no change in the piston acceleration. The rate of change in the piston acceleration explains any changes could happen in the engine power output as the last is related directly to the combustion pressure force. The more the reduction in the piston acceleration, the more of the energy available to the engine generators as the piston will store less kinetic energy.

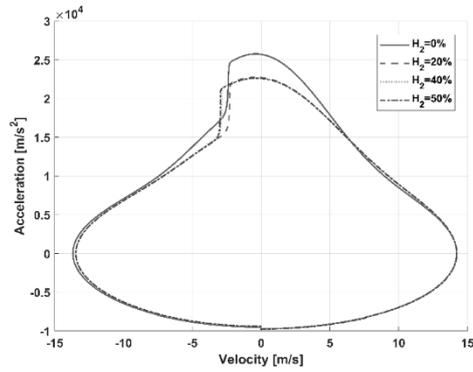


**Figure 4: Piston acceleration vs. velocity at different Hydrogen ratios**

Figure 5 shows the pressure-position diagram of the free piston engine at different percentages of hydrogen addition. When comparing the case of pure NG ( $H_2=0.0$ ) with other cases, that include hydrogen addition, one can recognize that the difference is significant in both of in-cylinder peak pressure and piston location near the top dead center (TDC). In the case of pure NG, the piston at the TDC is closer to the cylinder head and the in-cylinder peak pressure is much higher. However, when hydrogen is added by 20% for example; a large drop in the peak pressure is observed and the piston is shifted away from the cylinder head. By considering greater  $H_2$  to NG ratio, the change in the peak pressure and piston location becomes much smaller and for relatively high  $H_2$  to NG ratios ( $>60\%$ ); the change becomes even negligible. As hydrogen requires less heat to reach the ignition point compared to NG, variations in the peak pressure and piston location are noticed between the different hydrogen addition cases. Small amounts of hydrogen can change the total fuel-air combustion characteristics, especially in terms of fuel-air ignition conditions, thus the peak pressure and piston location will vary. However, the amount of adverse work (i.e., the inversion on the top of pressure-position diagram) is increased as hydrogen is presented in the engine fuel-air mixture. This indicates that the piston cannot convert the heat energy into mechanical energy in the same rate of converting the chemical energy of the fuel to heat energy. As the piston reaches the exhaust port, the gas exchange process will take place by replacing the in-cylinder residual gases by a new fresh charge.

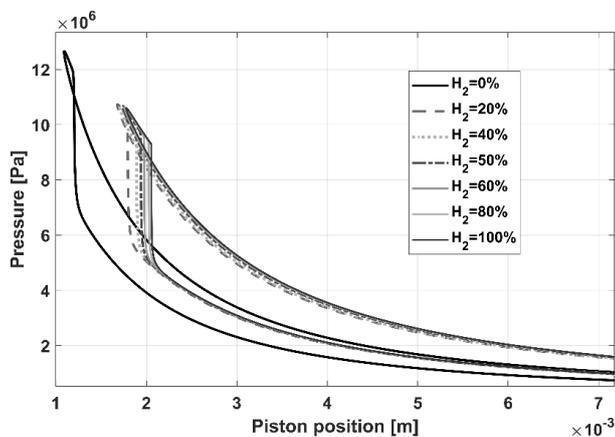


**Figure 5: Pressure-position diagram at different H2-NG ratios**

The pressure variations during this process are presented in Figure 6 in terms of pressure against the equivalent crank angle. By comparing two cases, one of pure NG and another with 50% hydrogen addition, the difference in the pressure is not significant during the process and it is not negligible by the end of the scavenging. The fact that the species transport during scavenging is influenced by the pressure and temperature of the involving gases and not by their reactions, explains why adding hydrogen has no effect on the gas exchange process.

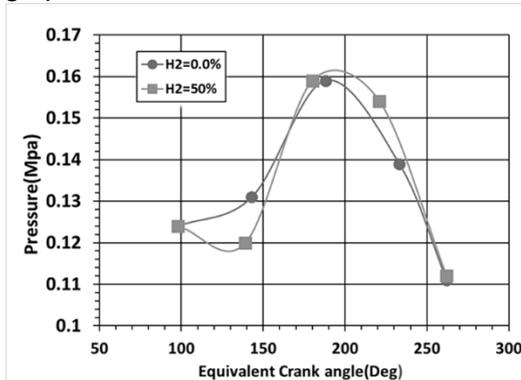

**Figure 6: Pressure-position diagram at different H<sub>2</sub>-NG ratio**


In Figure 7, the difference in both of initial pressure and initial temperature is presented against H<sub>2</sub>-NG ratio. The values of initial pressure and temperature have been calculated once the exhaust port is closed by the end of the scavenging process. The addition of hydrogen seems has no effect on the pressure and temperature values of the gas mixture, which means that these two parameters are mostly independent on the hydrogen addition (i.e., chemical content). On the other hand, other scavenging conditions, such as the induction pressure and engine speed, are dominant factors in defining the initial pressure and temperature of the engine cycle.

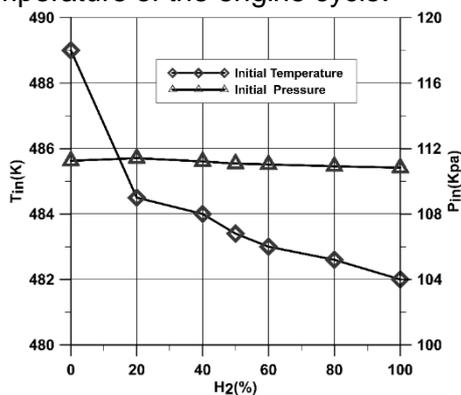

**Figure 7: Initial pressure and temperature by the end of the scavenging process**


The effect of hydrogen addition on the heat release rate is shown in Figure 8. Two main combustion aspects can be compared for each case of hydrogen addition. The first is the ignition delay and the second is the heat release rate. It is obvious from the Figure that adding hydrogen will reduce the ignition delay noticeably, as hydrogen percentage is more than 20%. Ignition delay, which is defined also by resistance toward knocking, becomes shorter, because hydrogen requires less energy to reach the self-ignition point. At the same time, hydrogen oxidation rate is much faster than NG gas, which includes long chain

hydrocarbons reactions. On the other hand, hydrogen has much higher heat release rate than NG gas, which explains why adding more hydrogen results with higher rates of heat. In terms of combustion duration, NG gas has longer burning period than hydrogen, due to the fact that the first has more resistance toward ignition and more complex molecular ponds than hydrogen.

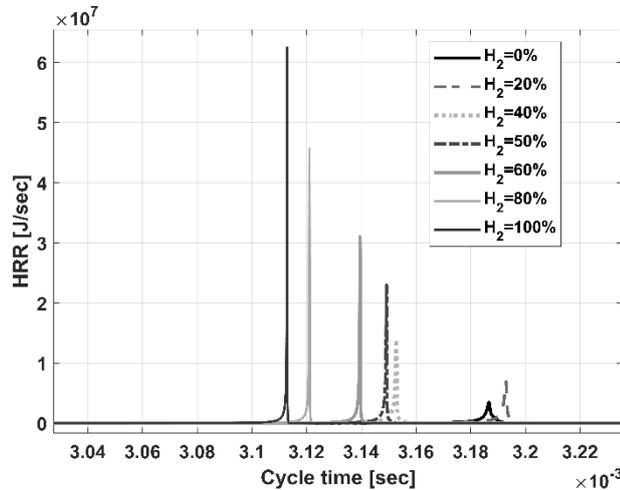


**Figure 8: Heat releasing rate at different H2-NG ratios**

Due to the change in ignition delay and combustion duration, the engine overall efficiency, presented by the ratio between the power of the electrical generator to the total heat release amount, is expected to vary with hydrogen addition. In Figure 9, a significant increase in the overall efficiency of the engine is observed as hydrogen is added by 20% to NG. For H<sub>2</sub>-NG ratio above 20%, the engine effective efficiency is within 40% with a rise of 4% from the pure NG case. The increase in the overall efficiency is explained by the increase in the heat of combustion as hydrogen percentage is increased which is indicated in Figure 10. The presence of high amount of combustion energy allows the piston to deliver more energy to the generator that will increase the system overall efficiency. For relatively high H<sub>2</sub>-NG percentages (>40%), heat release does not vary significantly, but the total efficiency decreases slightly due to the increase in the adverse work as indicted in Figure 5.

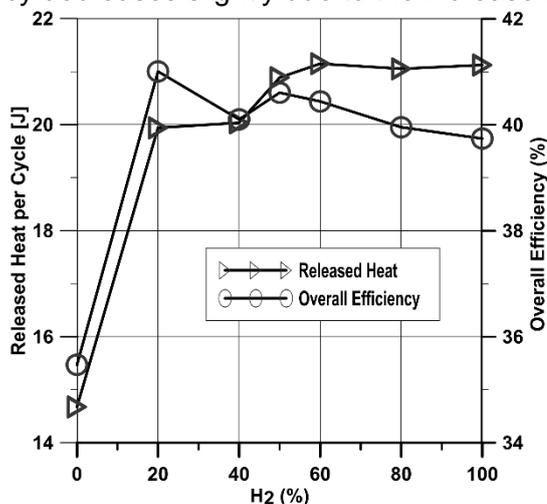


**Figure 9: Overall efficiency and accumulated heat at different H2-NG ratio.**

As design parameters, maximum in-cylinder pressure and temperature should be considered in any engine modeling process. High cylinder pressure can cause engine failure by increasing the wear at the piston rings. At the same time, high cylinder temperatures are proportional to engine emission especially  $\text{NO}_x$  emissions, which increase as the peak cylinder temperature increases. In Figure 10, the peak in-cylinder pressure and temperature against different  $\text{H}_2$ -NG ratios are demonstrated. The peak cylinder pressure drops by 2 MPa as hydrogen is added in 20% percent, but very slight change in its value is observed for ratios above 20%. The change in compression explains such drop in the peak cylinder pressure.

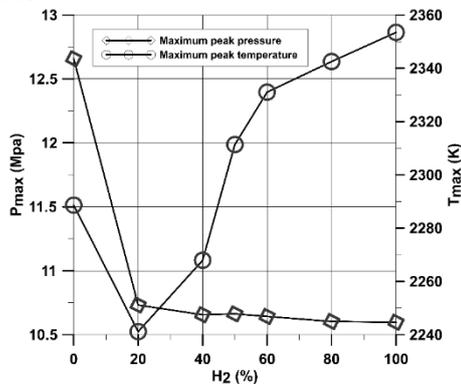

**Figure 10: In-cylinder peak pressure and temperature at different  $\text{H}_2$ -NG ratios**


Figure 11 indicates that there is a significant reduction in the compression ratio as long as hydrogen is added to the pure NG. The fuel-air mixture has low resistance to reach the ignition state as hydrogen species are implemented. However, a gradual rise in the cylinder peak temperature is obtained as  $\text{H}_2$ -NG ratio is increased, as can be concluded from Figure 11. As the heating value of hydrogen is high when compared with pure NG, the cylinder peak temperature is expected to increase in the presence of higher  $\text{H}_2$ -NG ratios.

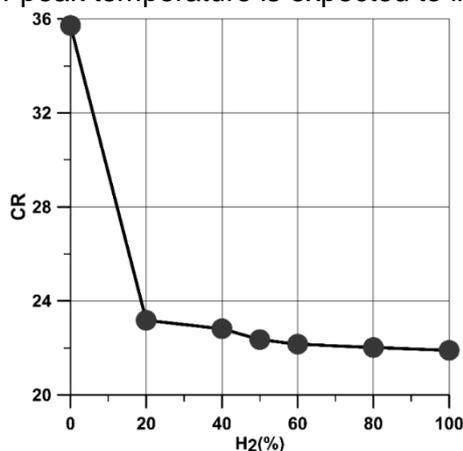

**Figure 11: Engine compression ratio at different  $\text{H}_2$ -NG ratio.**


In Figure 12, residual gases are presented in terms of  $\text{CO}_2$  and  $\text{H}_2\text{O}$  species for different  $\text{H}_2$ -NG ratios. Increasing the ratio of  $\text{H}_2$ -NG will decrease  $\text{CO}_2$  levels by reducing the amount of carbon mass available for oxidation. On the other hand,  $\text{H}_2\text{O}$  mass fraction increases due to the excess of hydrogen content available for the combustion process. Residual gases have a significant effect on the combustion characteristics of the engine as they have higher heat capacity than the fuel-air species, which can lower the heat release

rate and, therefore, decrease the peak temperature in the combustion chamber. Exhaust Gas Recirculation (EGR) principle applies basically the idea of recirculation some of the residual gases in order to decrease engine emissions, such as  $\text{NO}_x$ .

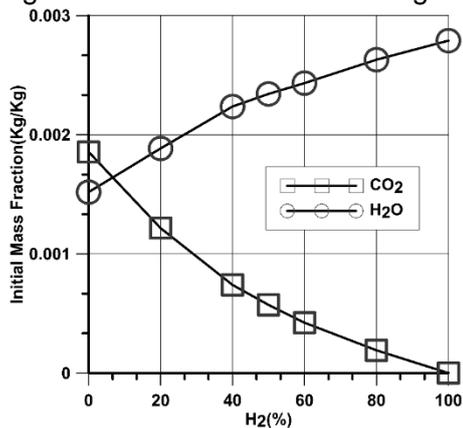

**Figure 12: Initial residual gas mass fraction ( $\text{H}_2\text{O}$ ,  $\text{CO}_2$ ) at different  $\text{H}_2$ -NG ratios.**


In the current study, the effect of hydrogen addition on free piston engine emissions has been also investigated. The study focuses on two main emissions, carbon monoxide ( $\text{CO}$ ) and nitrogen oxides ( $\text{NO}_x$ ).  $\text{CO}$  is a toxic gas and has many healthy and hazardous issues and it is caused due to the uncomplete oxidation of the fuel-air mixture [21].  $\text{NO}_x$  emissions, on the other hand, is one of the most dangerous emissions that has many healthy and environmentally effects [21]. Hydrogen addition changes the nature of the fuel-air combustion and, therefore, it is expected to have effects on the engine emissions. As  $\text{H}_2$ -NG ratio increases, the engine produces less  $\text{CO}$  emissions as indicated in Figure 13. Obviously, the reduction in carbon content due to the increase in hydrogen percentage is the reason behind the drop in  $\text{CO}$  emissions. On contrast,  $\text{NO}_x$  emissions start to increase as hydrogen amount increases in the fuel-air mixture. Since  $\text{NO}_x$  is usually coupled to in-cylinder peak temperature, the high heat release rate attached to the high hydrogen content causes the rise in  $\text{NO}_x$  levels of the engine.

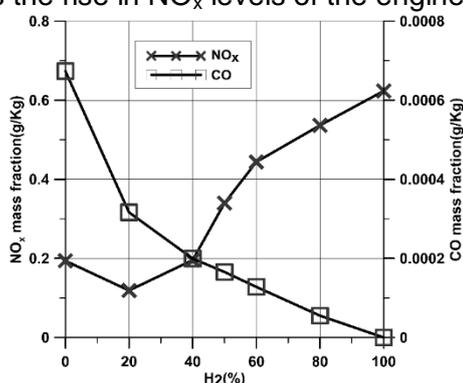

**Figure 13:  $\text{CO}$  and  $\text{NO}_x$  emission mass fractions at different  $\text{H}_2$ -NG ratios.**

The one-dimensional approach used in simulating the combustion process of fuel-air mixture assumes that the fuel-air mixture is homogenous and it has no significant variations along the combustion chamber. As HCCI combustion requires fuel and air species to be in homogenous and well mixing state, the variations in the fuel distribution through the combustion chamber have been investigated and described as shown in Figure 14. Three

different H<sub>2</sub>-NG ratios have been chosen and compared in terms of the hydrogen mass distribution in the combustion chamber. Figure 14 indicates a slight difference between the hydrogen concentration near the inlet port and this near the exhaust port. Adding hydrogen in higher percentages almost does not change the hydrogen distribution along the region between the engine ports. Therefore, using the one-dimensional approach is fairly enough for describing the fuel-air reactions especially that chemical kinetics is of high accuracy when compared to other empirical approaches.

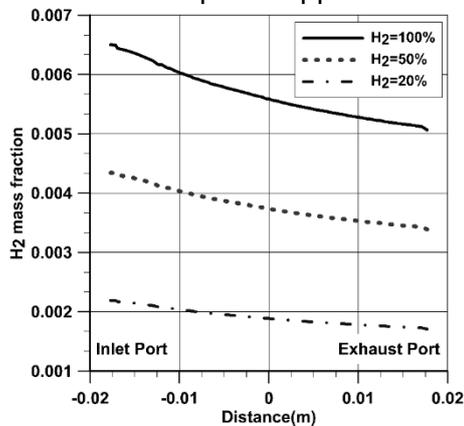

**Figure 14: H<sub>2</sub> mass distribution within the combustion chamber at different H<sub>2</sub>-NG ratio.**

## 5. Conclusions

The current study presents interesting investigations regarding the use of hydrogen as a fuel additive in free piston engines that employ HCCI combustion mode. Numerical approach, including 0D-dimensional and 3D-CFD analysis, has been used to obtain the study results. The simulation process has been described by using two main models, the combustion model which is responsible about calculating the heat release rate of combustion. In this model, chemical kinetics approach has been used through Cantera toolkit to estimate heat release rate and emissions of the free piston engine under HCCI conditions. The other model is the scavenging model, in which the gas exchange process between the combustion products and the fresh charge is simulated using 3D-CFD tools available in Ansys fluent software. The results show that hydrogen addition has the ability to influence free piston engine dynamics by affecting the combustion characteristics of the engine. Hydrogen reduces ignition delay time and combustion duration of the air fuel-mixture and, therefore, allows the engine to work with lower compression ratio. Hydrogen also decreases the in-cylinder peak pressure, but at the same time allows the engine to operate with higher mechanical efficiency as it increases the heat release rate. However, hydrogen addition causes the in-cylinder peak temperature to increase, which increases NO<sub>x</sub> emission levels of the engine. On the other hand, hydrogen addition decreases CO levels due to the reduction in the carbon content in the fuel-air mixture. Finally, hydrogen has no significant effect on the initial pressure, temperature and gas mixture species as they all depend on different scavenging parameters mainly. The distribution of the fuel-air species through the combustion chamber is almost homogenous with slight variations between the inlet and exhaust ports and no effect on the distribution is observed as H<sub>2</sub>-NG ratio is changed.

## 6. References

- [1] Clark, N, *et al*, Operation of a Small Bore Two-Stroke Linear Engine, Clymer, NY, 1998.
- [2] Ba, H, *et al*, Simulation study of si-hcci transition in a two-stroke free piston engine fuelled with propane, *SAE Technical Paper*, no. 2014-01-1104 (2014), 2014.
- [3] Jia, *et al*, Development and validation of a free-piston engine generator numerical model, *Energy Conversion and Management*, vol. 91, , 2015. pp. 333-341
- [4] Charalambides, A, Homogeneous Charge Compression Ignition (HCCI) Engines, *Advances in Internal Combustion Engines and Fuel Technologies*, 2013.
- [5] Haraldsson, G ,*et al*, Hcci combustion phasing in a multi cylinder engine using variable compression ratio, *SAE Technical Paper*, no. 2002-01-2858 (2002), 2002.
- [6] Ying, Y and Liu, D, Detailed influences of chemical effects of hydrogen as fuel additive on methane flame, *international journal of hydrogen energy* , vol. 40, , 2015. pp. 3777-3788
- [7] Ma, F, *et al*, Effects of hydrogen addition on cycle-by-cycle variations in a lean burn natural gas spark-ignition engine, *International Journal of Hydrogen Energy*, vol. 33, no. 2, , 2008. pp. 823-831
- [8] Dillon, A, *et al* ,Storage of hydrogen in single-walled carbon nanotubes, *Nature*, vol. 386, pp. 377-379, 1997.
- [9] Yap, D *et al*, Effect of Hydrogen Addition on Natural Gas HCCI Combustion, *SAE Technical Paper* , no. 2004-01-1972, 2004.
- [10] Askari, H *et al*, Effect of Hydrogen Addition to Natural Gas on Homogeneous Charge Compression Ignition Combustion Engines Performance and Emissions Using a Thermodynamic Simulation, *International Journal of Automotive Engineering*, vol. 1, no. 2, pp. 105-114, 2011.
- [11] Guo, H and Neill, W, The effect of hydrogen addition on combustion and emission characteristics of an n-heptane fuelled HCCI engine, *International journal of hydrogen energy*, vol. 38, , 2013. pp. 111429-11437
- [12] Hu, E *et al*, Study on the effect of hydrogen addition to dimethyl ether homogeneous charge compression ignition combustion engine, *JOURNAL OF RENEWABLE AND SUSTAINABLE ENERGY* , vol. 7, 2015.
- [13] Hammond, Z *et al* ,Effect of hydrogen peroxide addition to methane fueled homogeneous charge compression ignition engines through numerical simulations, *International Journal of Engine Research*, vol. 17, no. 2, , 2016. pp. 1-12
- [14] D. Cantera, "Cantera," 2011. [Online]. Available: <http://www.cantera.org/docs/sphinx/html/index.html>.
- [15] Smith, G *et al*, GRI-MECH 3.0," URL [http://www.me.berkeley.edu/gri\\_mech/](http://www.me.berkeley.edu/gri_mech/), 2008.
- [16] Blair, G, Design and simulation of two-stroke engines, Warrendale, PA : Society of Automotive Engineers, 1996.
- [17] Chang, J *et al*, New Heat Transfer Correlation for An HCCI ENgine Derived From Measurments of Instantaneous Surface Heat Flux, *SAE Technical Paper*, no. 2004-01-2996, 2004.

- [18] Mao, J *et al*, Multi-dimensional scavenging analysis of a free-piston linear alternator based on numerical simulation, *Applied Energy*, vol. 88, no. 4, 2011. pp. 1140-1152,
- [19] Van Blarigan, P *et al*, Homogeneous Charge Compression Ignition with a Free Piston; A New Approach to Ideal Otto Cycle Performance, *SAE Technical Paper* , 1998.
- [20] Alrbai, M *et al*, Impact of Exhaust Gas Recirculation on Performance and Emissions of Free-Piston Electrical Generator Fueled by DME, *Journal of energy engineering* , vol. 144, no. 3, 2018.
- [21] Heywood, J, *Internal Combustion Engine Fundamentals*, McGraw-Hill Education, 1988.