

INTEGRAL BALANCE METHODS APPLIED TO NON-CLASSICAL STEFAN PROBLEMS

by

**Julieta BOLLATI^{a,b}, Maria F. NATALE^b, Jose A. SEMITIEL^{b*},
and Domingo A. TARZIA^{a,b}**

^a Consejo Nacional de Investigaciones Cientificas y Tecnologicas (CONICET), Rosario, Argentina

^b Departamento Matematica – FCE, Universidad Austral, Rosario, Argentina

Original scientific paper

<https://doi.org/10.2298/TSCI180901310B>

We consider two different Stefan problems for a semi-infinite material for the non-classical heat equation with a source that depends on the heat flux at the fixed face. One of them, with constant temperature at the fixed face, was already studied in literature and the other, with a convective boundary condition at the fixed face, is presented in this work. Due to the complexity of the exact solution it is of interest to compare with approximate solutions obtained by applying heat balance integral methods, assuming a quadratic temperature profile in space. A dimensionless analysis is carried out by using the parameters: Stefan number and the generalized Biot number. In addition it is studied the case when Biot number goes to infinity, recovering the approximate solutions when a Dirichlet condition is imposed at the fixed face. Some numerical simulations are provided in order to verify the accuracy of the approximate methods.

Key words: Stefan problem, convective boundary condition, similarity solution, heat balance integral method, refined integral method

Introduction

Stefan problems model heat transfer processes that involve a change of phase. They constitute a broad field of study since they arise in a great number of mathematical and industrial significance problems [1]. A review on analytical solutions is given in [2]. In this paper, firstly, we consider a free boundary problem, P , with a non-classical heat equation for a semi-infinite material [3] defined:

$$\rho c \frac{\partial U}{\partial t} - k \frac{\partial^2 U}{\partial x^2} = -\gamma F \left[\frac{\partial U}{\partial x}(0, t), t \right], \quad 0 < x < S(t), \quad t > 0 \quad (1)$$

$$U(0, t) = u_\infty > 0, \quad t > 0 \quad (2)$$

$$U[S(t), t] = 0, \quad t > 0 \quad (3)$$

$$k \frac{\partial}{\partial x} [S(t), t] = -lS(t), \quad t > 0 \quad (4)$$

* Corresponding author, e-mail: jsemitiel@austral.edu.ar

$$S(0) = 0 \quad (5)$$

where the thermal coefficients k , ρ , c , l , and γ are positive constants and the control function F depend on the evolution of the heat flux at the boundary $x = 0$:

$$F \left[\frac{\partial U}{\partial x}(0, t), t \right] = \frac{\lambda_0}{t^{1/2}} \frac{\partial U}{\partial x}(0, t) \quad (6)$$

where $\lambda_0 > 0$ is a given constant. This problem was studied in [4].

The phase-change problem is also considered with a convective condition [5] at the fixed face $x = 0$. It states that heat flux at the fixed face is proportional to the difference between the material temperature and the neighbourhood temperature, that is:

$$k \frac{\partial U}{\partial x}(0, t) = H(t) [U(0, t) - u_\infty]$$

where $H(t)$ characterizes the heat transfer at the fixed face and $0 < U(0, t) < u_\infty$. We take a free boundary problem with a convective condition of the form:

$$H(t) = \frac{h}{t^{1/2}}$$

where $h > 0$ characterizes the heat transfer coefficients [6]. More precisely, we consider a free boundary problem, P_h , which is defined by eq. (1), conditions (3)-(5) of problem, P , and the condition:

$$k \frac{\partial U}{\partial x}(0, t) = \frac{h}{t^{1/2}} (U(0, t) - u_\infty), \quad t > 0 \quad (7)$$

instead condition (2) of problem, P .

Due to the non-linear nature of this type of problems exact solutions are limited to a few cases. Although it can be found exact solutions, it is usefull to solve them either numerically or approximately. Despite having the exact solution the problem that we will study, it is very complicated to find the exact solution. The heat balance integral method introduced by Goodman [7] is a well-known approximate mathematical technique for solving the location of the free front in heat-conduction problems involving a phase of change. This method consists in transforming the heat equation into an ODE over time by assuming a quadratic temperature profile in space. In [8-11] this method is applied using different accurate temperature profiles such as: exponential, potential, *etc.*

Recently, various papers has been published applying integral methods to a variety of thermal and free boundary problems, especially to non-linear heat conduction and fractional diffusion [12-17].

In this paper, we obtain approximate solutions through heat balance integral methods and variants obtained thereof proposed [18] for the problems, P , and P_h . As one of the mechanisms for the heat conduction is the diffusion, the excitation at the fixed face $x = 0$ (for example, a temperature, a flux or a convective condition) does not spread instantaneously to the material $x > 0$. However, the effect of the fixed boundary condition can be perceived in a bounded interval $[0, \delta(t)]$ (for every time $t > 0$) outside of which the temperature remains equal to the initial temperature. The heat balance integral method presented [7] established the existence of a function $\delta = \delta(t)$ that measures the depth of the thermal layer. In problems with a phase of change, this layer is assumed to be the free boundary, *i. e.* $\delta(t) = s(t)$.

From condition (3), using eq. (1), we obtain the new condition:

$$\left(\frac{\partial U}{\partial x}\right)^2 [S(t), t] = -\frac{l}{kc} \left\{ k \frac{\partial^2 U}{\partial x^2} [S(t), t] - \gamma \frac{\lambda_0}{t^{1/2}} \frac{\partial U}{\partial x} (0, t) \right\} \quad (8)$$

From eq. (1) and conditions (3)-(4) we obtain the integral condition:

$$\frac{d}{dt} \int_0^{S(t)} U(x, t) dx = -\frac{\partial U}{\partial x} (0, t) \left[\gamma \lambda_0 \frac{S(t)}{t^{1/2}} + k \right] - \frac{l}{c} \dot{S}(t) \quad (9)$$

The classical heat balance integral method introduced in [7] to solve problem, P or P_h , proposes the resolution of a problem that arises by replacing the eq. (1) by the condition (9), and the condition (4) by the condition (8), keeping all others conditions of the problem, P or P_h , equals.

In [18], a variant of the classical heat balance integral method was proposed by replacing only eq. (1) by condition (9), keeping all others conditions of the problem, P or P_h , equals.

From eq. (1) and conditions (2) and (3) we can also obtain:

$$\int_0^{S(t)} \int_0^x \frac{\partial U}{\partial t} (\xi, t) d\xi dx = \frac{1}{\rho c} \left[-\gamma \lambda_0 \frac{S^2(t)}{2t^{1/2}} \frac{\partial U}{\partial x} (0, t) - k u_\infty - k \frac{\partial U}{\partial x} (0, t) S(t) \right] \quad (10)$$

The refined heat balance integral method introduced in [19] to solve the problem, P , proposes the resolution of the approximate problem that arises by replacing eq. (1) by condition (10), keeping all others conditions of the problem, P or P_h , equals.

For solving the approximate problems previously defined we propose a quadratic temperature profile in space:

$$U(x, t) = \tilde{A} u_\infty \left[1 - \frac{x}{S(t)} \right] + \tilde{B} u_\infty \left[1 - \frac{x}{S(t)} \right]^2, \quad 0 < x < S(t), \quad t > 0$$

where \tilde{A} and \tilde{B} are unknown constants to be determined. Notice that U satisfies condition (3).

The goal of this paper is to study different approximations for 1-D one-phase Stefan problems with a source function that depends on the flux. It is considered two different problems, which differ from each other in the boundary condition imposed at the fixed face $x = 0$: temperature (Dirichlet) condition or convective (Robin) condition. In next section we present the exact solution of the problem, P , which was given in [4]. Taking advantage of the exact solution of P , we obtain approximate solutions using the heat balance integral method, an alternative method of it and the refined integral method, comparing each approach with the exact one. A similar study is done in following section for the problem with a convective condition at the fixed face, P_h . In order to make this analysis, we obtain previously the exact solution of P_h . We also study the limit cases of the obtained approximate solutions when $h \rightarrow \infty$, recovering the approximate solutions when a temperature condition at the fixed face is imposed.

Exact and approximate solutions to the one-phase Stefan problem for a non-classical heat equation with a source and a temperature condition at the fixed face

In this section we present the exact solution of the problem, P , and we obtain approximate solutions by using heat balance integral methods, comparing each approach with the exact one.

Exact solution of problem, P

In [4], it has been proved that for each dimensionless parameter:

$$\lambda = \frac{\lambda_0}{(k\rho c)^{1/2}} > 0$$

the free boundary problem, P , where, F , defined by (6), has a unique similarity solution of the type:

$$u(x,t) = u_\infty \left[1 - \frac{E(\eta, \lambda)}{E(\xi, \lambda)} \right], \quad 0 < \eta = \frac{x}{2at^{1/2}} < \xi$$

$$s(t) = 2a\xi t^{1/2}, \quad a^2 = \frac{k}{\rho c} \quad (\text{diffusion coefficient})$$

where

$$E(x, \lambda) = \operatorname{erf}(x) + \frac{4\lambda}{\pi^{1/2}} \int_0^x f(r) dr, \quad f(x) = \exp(-x^2) \int_0^x \exp(r^2) dr \quad (11)$$

and $\xi > 0$ is the unique solution:

$$\operatorname{Ste} \exp(-x^2) - \pi^{1/2} x \operatorname{erf}(x) = 2\lambda \left[2x \int_0^x f(r) dr - \operatorname{Ste} f(x) \right], \quad x > 0 \quad (12)$$

where

$$\operatorname{erf}(x) = \frac{2}{\pi^{1/2}} \int_0^x \exp(-r^2) dr$$

and the dimensionless parameter defined by $\operatorname{Ste} = cu_\infty/l$ represents the Stefan number. We remark that function f defined in (11), is called the Dawson's integral.

From now on, we will consider the case $\operatorname{Ste} \in (0, 1)$, due to the fact that for most phase-change materials candidates over a realistic temperature, the Stefan number will not exceed one [20].

Approximate solution using the classical heat balance integral method

The classical heat balance integral method in order to solve the problem, P , proposes the resolution of the approximate problem, P_1 , defined by eqs. (2), (3), (5), (8), and (9). Proposing the following quadratic temperature profile in space:

$$u_1(x,t) = A_1 u_\infty \left[1 - \frac{x}{s_1(t)} \right] + B_1 u_\infty \left[1 - \frac{x}{s_1(t)} \right]^2, \quad 0 < x < s_1(t), \quad t > 0$$

the free boundary takes the form:

$$s_1(t) = 2a\xi_1 t^{1/2}, \quad t > 0$$

where the constants A_1 , B_1 , and ξ_1 will be determined from the conditions (2), (8), and (9). We obtain:

$$A_1 = \frac{-2(3 + \operatorname{Ste})\xi_1^2 + 12\lambda \operatorname{Ste} \xi_1 + 6\operatorname{Ste}}{\operatorname{Ste}(\xi_1^2 + 6\lambda \xi_1 + 3)}, \quad B_1 = \frac{3(2 + \operatorname{Ste})\xi_1^2 - 6\lambda \operatorname{Ste} \xi_1 - 3\operatorname{Ste}}{\operatorname{Ste}(\xi_1^2 + 6\lambda \xi_1 + 3)}$$

and ξ_1 must be a positive solution of the polynomial equation:

$$-4\lambda(3 + 2Ste)z^5 + 2[12 + 9Ste + 2Ste^2 - 12\lambda^2(3 + 2Ste)]z^4 - 12\lambda(-9 + 16Ste + 4Ste^4)z^3 + 12(1 + 2Ste)[-3 + (6\lambda^2 - 1)Ste]z^2 + 72\lambda Ste(1 + 2Ste)z + 18Ste + 3Ste^2 = 0, \quad z > 0$$

It is easy to see that eq. (13) has at least one solution. Descartes' rule of signs states that if the terms of a single-variable polynomial with real coefficients are ordered by descending variable exponent, then the number of positive roots of the polynomial is either equal to the number of sign differences between consecutive non-zero coefficients, or is less than it by an even number. Therefore, in our case, to have a unique solution of (13) is enough to take λ such that $12 + 9Ste + 2Ste^2 - 12\lambda^2(3 + 2Ste) < 0$:

$$\lambda > \left(\frac{2Ste^2 + 9Ste + 12}{36 + 24Ste} \right)^{1/2} \equiv g(Ste)$$

and as g is an increasing function then for $0 < Ste < 1$ it is sufficient to take $\lambda > g(1) \cong 0.61913991873$.

As the approximate methods we are working with are designed as a technique for tracking the location of the free boundary, the comparisons between the approximate solutions and the exact one will be done on the free boundary thought the coefficients that characterizes them. That is to say, we will compare the known exact solution of the Stefan problem, P , and the approximate solution of the problem, P_1 , by computing the coefficients ζ and ζ_1 that characterizes the free boundaries, which are obtained by solving (12) and (13), respectively. In fig. 1, we plot the dimensionless coefficients ζ and ζ_1 against Ste , fixing $\lambda = 7$.

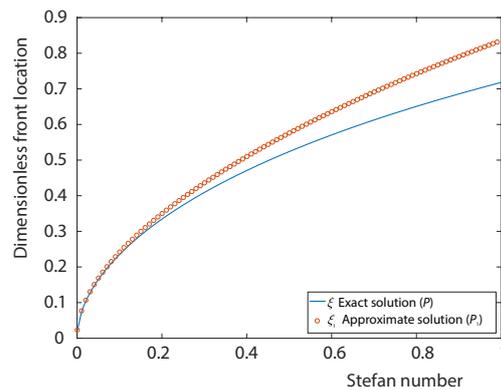


Figure 1. Plot of the dimensionless coefficients ζ and ζ_1 against Stefan number, for $\lambda = 0.7$

Approximate solution using a modified method of the classical heat balance integral method

An alternative method of the classical heat balance integral method in order to solve the problem, P , proposes the resolution of the approximate problem, P_2 , defined by eqs. (2)-(5), and (9).

Proposing the following quadratic temperature profile in space:

$$u_2(x, t) = A_2 u_\infty \left[1 - \frac{x}{s_2(t)} \right] + B_2 u_\infty \left[1 - \frac{x}{s_2(t)} \right]^2, \quad 0 < x < s_2(t), \quad t > 0$$

the free boundary takes the form $s_2(t) = 2a\zeta_2 t^{1/2}$, $t > 0$, where the constants A_2 , B_2 , and ζ_2 will be determined from the conditions (2), (4) and (9). We obtain:

$$A_2 = \frac{2}{Ste} \zeta_2^2, \quad B_2 = 1 - \frac{2}{Ste} \zeta_2^2$$

and ζ_2 must be a positive solution of the polynomial equation:

$$z^4 + 6\lambda z^3 + (6 + Ste)z^2 - 6\lambda Ste z - 3Ste = 0, \quad z > 0 \tag{15}$$

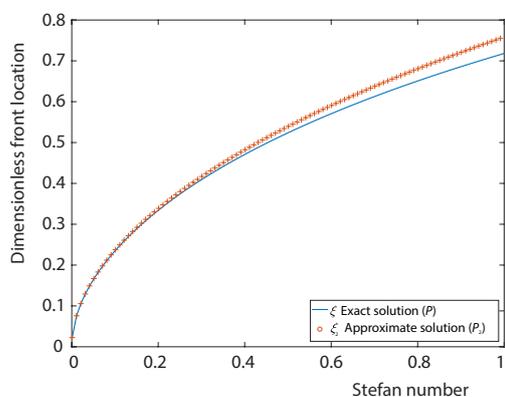


Figure 2. Plot of the dimensionless coefficients ξ and ξ_2 against Stefan number, for $\lambda = 0.7$

Approximate solution using the refined integral method

The refined heat balance integral method in order to solve the problem, P , proposes the resolution of an approximate problem, P_3 , formulated by conditions (2)-(5) and (10). Proposing the following quadratic temperature profile in space:

$$u_3(x, t) = A_3 u_\infty \left[1 - \frac{x}{s_3(t)} \right] + B_3 u_\infty \left[1 - \frac{x}{s_3(t)} \right]^2, \quad 0 < x < s_3(t), \quad t > 0$$

the free boundary takes the form $s_3(t) = 2a\zeta_3 t^{1/2}$, $t > 0$, where the constants A_3 , B_3 , and ζ_3 will be determined from the conditions (2), (4) and (10). We obtain:

$$A_3 = \frac{2}{Ste} \zeta_3^2, \quad B_3 = 1 - \frac{2}{Ste} \zeta_3^2$$

and ζ_3 must be a positive solution of the polynomial equation:

$$-6\lambda z^3 - (6 + Ste)z^2 + 6\lambda Ste z + 3Ste = 0, \quad z > 0 \tag{16}$$

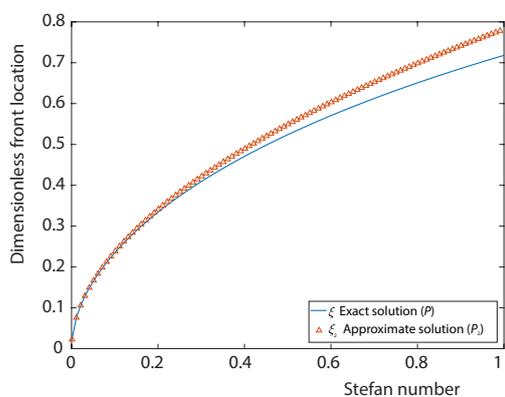


Figure 3. Plot of the dimensionless coefficients ξ and ξ_2 against Stefan number, for $\lambda = 0.7$

It is easy to see, using the Descartes' rule of signs, that (15) has a unique positive solution.

To compare the free boundaries obtained in problem, P , and the approximate problem, P_2 , we compute the coefficient that characterizes the free boundaries. The exact value of ζ and the approach ζ_2 are the unique roots of eqs. (12) and (15), respectively.

In fig. 2 we show, for $0 < Ste < 1$, how the dimensionless coefficient ζ_2 , which characterizes the location of the free boundary s_2 , approaches the coefficient ζ , corresponding to the exact free boundary s , when the dimensionless parameter is $\lambda = 0.7$.

It is easy to see, using the Descartes' rule of signs, that (16) has a unique positive solution.

To compare the free boundaries obtained in problem, P , and the approximate problem, P_3 , we compute the coefficient that characterizes the free boundaries. The exact value of ζ and the approach ζ_3 is obtained by solving the equations obtained in (12) and (16), respectively.

For every $Ste < 1$, we plot the numerical value of the dimensionless coefficient ζ_3 obtained by applying the refined integral method, against the exact coefficient ζ , fig. 3.

Comparisons between solutions

In this subsection, for different Stefan numbers, we make comparisons between the numerical value of the coefficient ζ given by eq. (12) and the approximations ζ_1 , ζ_2 , and ζ_3 given by eqs. (13), (15), and (16), respectively. In order to compare the approximate solution with the exact one, and to obtain which technique gives the best agreement, we display in tab. 1, the exact dimensionless free front, and its different approaches, showing also the percentage relative error committed in each case being:

$$E_{rel}(\zeta_i) = 100 \frac{|\zeta_i - \zeta|}{|\zeta|}, \quad i = 1, 2, 3$$

Table 1. Dimensionless free front coefficients and its relative errors for $\lambda = 0.7$

Ste	$\zeta(P)$	$\zeta_1(P_1)$	$E_{rel}(\zeta_1)$	$\zeta_2(P_2)$	$E_{rel}(\zeta_2)$	$\zeta_3(P_3)$	$E_{rel}(\zeta_3)$
0.1	0.2351	0.2401	2.139%	0.2363	0.545%	0.2373	0.963%
0.3	0.4091	0.4348	6.284%	0.4162	1.753%	0.4211	2.932%
0.5	0.5238	0.5750	9.776%	0.5392	2.934%	0.5489	4.788%
0.7	0.6125	0.6903	12.69%	0.6373	4.048%	0.6524	6.510%
0.9	0.6857	0.7897	15.16%	0.7206	5.087%	0.7413	8.102%

It may be noticed that the relative error committed in each approximate technique increases when the Stefan number becomes greater, reaching the percentages 16.25%, 5.579%, and 8.854% for the problems, P_1 , P_2 , and P_3 , respectively.

Exact and approximate solutions to the one-phase Stefan problem for a non-classical heat equation with a source and a convective condition at the fixed face

In this section we present the exact solution of the problem, P_h , and we obtain different approaches by using heat balance integral methods, comparing them with the exact one.

Exact solution of problem P_h

In this subsection we will obtain the exact solution of the problem, P_h , given by eqs. (1), (3)-(5), and (7) instead of condition (2) of problem, P . In similar way as [4], if we define the similarity variable $\eta = x/(2at^{1/2})$ and $\Phi(\eta) = u_h(x, t)$, then P_h , turns equivalent to the following ordinary differential problem:

$$\Phi''(\eta) + 2\eta\Phi'(\eta) = 2\lambda\Phi'(0), \quad 0 < \eta < \xi_h \tag{17}$$

$$\Phi'(0) = 2Bi[\Phi(0) - u_\infty] \tag{18}$$

$$\Phi(\xi_h) = 0, \quad \Phi'(\xi_h) = -2\frac{u_\infty}{Ste}\xi_h \tag{19}$$

where the dimensionless parameter defined by $Bi = ha/k$ represent the generalized Biot number and ξ_h is the coefficient that characterizes the free boundary s_h . It is a simple matter to find the solution (17)-(19) and thus the solution, P_h , which is given:

$$u_h(x, t) = \Phi(\eta) = \frac{Bi u_\infty \pi^{1/2}}{1 + Bi \pi^{1/2} E(\xi_h, \lambda)} [E(\xi_h, \lambda) - E(\eta, \lambda)], \quad 0 < \eta < \xi_h$$

$$s_h(t) = 2a\xi_h t^{1/2}$$

where the function E is given by eq. (11) and $\zeta_h > 0$ must be a solution:

$$\text{Ste} \exp(-x^2) - \pi^{1/2} x \operatorname{erf}(x) - \frac{kx}{ha} = 2\lambda \left[2x \int_0^x f(r) dr - \text{Ste} f(x) \right], \quad x > 0 \quad (20)$$

We can apply similar results obtained in [4] to prove that there exists a unique solution ζ_h of eq. (20).

Notice that in problem, P_h , a convective boundary condition (7) characterized by the coefficient h at the fixed face $x=0$ is imposed. This condition constitutes a generalization of the Dirichlet one in the sense that if we take de limit when $h \rightarrow \infty$ we must obtain $U(0, t) = u_\infty$. From definition of Biot number, studying the limit behaviour of the solution our problem, P_h , when $h \rightarrow \infty$ is equivalent to study the case when $\text{Bi} \rightarrow \infty$.

If for every h , we define ζ_h as the unique solution (20) then, it can be observed that $\{\zeta_h\}$ is increasing and bounded, and so convergent. In addition, it can be easily seen that $\zeta_h \rightarrow \zeta$ where ζ is the unique solution (12). Then, we can state that the solution problem, P_h , converges to the solution problem, P , when $\text{Bi} \rightarrow \infty$ (i. e. $h \rightarrow \infty$), that is: $\lim_{h \rightarrow \infty} s_h(t) = s(t)$ and $\lim_{h \rightarrow \infty} u_h(x, t) = u(x, t)$, $0 < x < s(t)$, $t > 0$.

Approximate solution using the classical heat balance integral method

The classical heat balance integral method in order to solve the problem, P_h , proposes the resolution of the approximate problem, P_{h_1} , defined by eqs. (3), (5), (7)-(9). For the quadratic temperature profile in space:

$$u_{h_1}(x, t) = A_{h_1} u_\infty \left(1 - \frac{x}{s_{h_1}(t)} \right) + B_{h_1} u_\infty \left(1 - \frac{x}{s_{h_1}(t)} \right)^2, \quad 0 < x < s_{h_1}(t), \quad t > 0$$

the free boundary takes the form $s_{h_1}(t) = 2a\zeta_{h_1} t^{1/2}$, $t > 0$ where the constants A_{h_1} , B_{h_1} , and ζ_{h_1} will be determined from the conditions (7)-(9). We obtain:

$$A_{h_1} = \frac{-2(3 + \text{Ste})\zeta_{h_1}^2 + \left(12\lambda\text{Ste} - \frac{6}{\text{Bi}}\right)\zeta_{h_1} + 6\text{Ste}}{\text{Ste} \left[\zeta_{h_1}^2 + \left(6\lambda + \frac{2}{\text{Bi}}\right)\zeta_{h_1} + 3 \right]}, \quad B_{h_1} = \frac{3(2 + \text{Ste})\zeta_{h_1}^2 + \left(\frac{3}{\text{Bi}} - 6\lambda\text{Ste}\right)\zeta_{h_1} - 3\text{Ste}}{\text{Ste} \left[\zeta_{h_1}^2 + \left(6\lambda + \frac{2}{\text{Bi}}\right)\zeta_{h_1} + 3 \right]}$$

and $\zeta_h > 0$ must be a solution of the polynomial equation:

$$\begin{aligned} & -4\lambda(3 + 2\text{Ste})z^5 + 2 \left[12 + 9\text{Ste} + 2\text{Ste}^2 - 12\lambda^2(3 + 2\text{Ste}) - \frac{4\lambda}{\text{Bi}}(3 + 2\text{Ste}) \right] z^4 + \\ & + \left[-12\lambda(-9 + 16\text{Ste} + 4\text{Ste}^4) + \frac{6}{\text{Bi}}(7 + 2\text{Ste}) \right] z^3 + \\ & + 12 \left\{ (1 + 2\text{Ste}) \left[-3 + (6\lambda^2 - 1)\text{Ste} \right] + \frac{2}{\text{Bi}^2} - \frac{3\lambda}{\text{Bi}}(1 + \text{Ste}) \right\} z^2 + \\ & + \left[72\lambda\text{Ste}(1 + 2\text{Ste}) - \frac{6}{\text{Bi}}(3 + 10\text{Ste}) \right] z + 18\text{Ste} + 3\text{Ste}^2 = 0, \quad z > 0 \end{aligned} \quad (21)$$

It is easy to see that eq. (21) has at least one solution. In order to prove uniqueness, we are going to use Descartes' rule of signs. Therefore, if we rewrite eq. (21):

$$\sum_{i=0}^5 a_i z^i = 0$$

we have to analyse the sign of each coefficient a_i . Clearly, $a_5 < 0$ and $a_0 > 0$. For $0 < Ste < 1$ and $\lambda > 0.62$, as in problem, P_1 , $a_4 < 0$ for all Bi. Under these hypothesis: $a_3 < 0$ and $a_1 > 0$ if and only if:

$$Bi > \frac{3 + 10Ste}{12\lambda Ste(1 + 2Ste)}$$

Moreover the solution problem, P_{h_1} , converges to the solution problema, P_1 , when $Bi \rightarrow \infty$.

To compare the solutions obtained in P_h and P_{h_1} , we compute the coefficient that characterizes the free boundary in each problem. The exact value of ζ_h and the approach ζ_{h_1} are obtained by solving the equations obtained in (20) and (21), respectively. In fig. 4 we plot the coefficients ζ_h and ζ_{h_1} against Biot number in order to visualize the behaviour of the approximate solution, fixing $Ste = 0.5$ and $\lambda = 0.7$. In order that the convergence mentioned previously of $\zeta_h \rightarrow \zeta$ and $\zeta_{h_1} \rightarrow \zeta_1$ when $Bi \rightarrow \infty$, could be appreciated, we also plot ζ and ζ_1 given by the solution of (12) and (13), respectively.

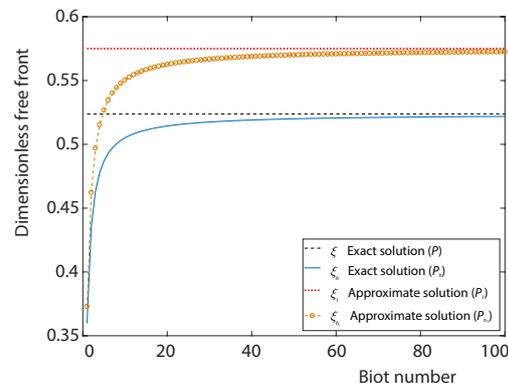


Figure 4. Plot of the dimensionless coefficients ζ_h and ζ_{h_1} against Biot number, for $Ste = 0.5$ and $\lambda = 0.7$

Approximate solution using a modified method of the classical heat balance method

An alternative method of the classical heat balance integral method in order to solve the problem, P_h , proposes the resolution of the approximate problem, P_{h_2} , defined by eqs. (3)-(5), (7), and (9):

$$u_{h_2}(x, t) = A_{h_2} u_\infty \left[1 - \frac{x}{s_{h_2}(t)} \right] + B_{h_2} u_\infty \left[1 - \frac{x}{s_{h_2}(t)} \right]^2, \quad 0 < x < s_{h_2}(t), \quad t > 0$$

then the free boundary takes the form $s_{h_2}(t) = 2a\zeta_{h_2} t^{1/2}$, $t > 0$ where the constants A_{h_2} , B_{h_2} , and ζ_{h_2} will be determined from the conditions (4), (7), and (9). We obtain:

$$A_{h_2} = \frac{2}{Ste} \zeta_{h_2}^2, \quad B_{h_2} = \frac{-\frac{2}{Ste} \zeta_{h_2}^3 - \frac{1}{Ste Bi} \zeta_{h_2}^2 + \zeta_{h_2}}{\zeta_{h_2} + \frac{1}{Bi}}$$

and in this way, it turns out that $\zeta_{h_2} > 0$ must be a solution of the polynomial equation:

$$z^4 + \left(6\lambda + \frac{2}{Bi} \right) z^3 + (6 + Ste) z^2 - \left(6\lambda Ste + \frac{3}{Bi} \right) z - 3Ste = 0, \quad z > 0 \tag{22}$$

where existence and uniqueness of solution for it can be easily seen by Descartes' rule of signs.

Moreover, the solution problem, P_{h_2} , converges to the solution problem, P_2 , when $Bi \rightarrow \infty$.

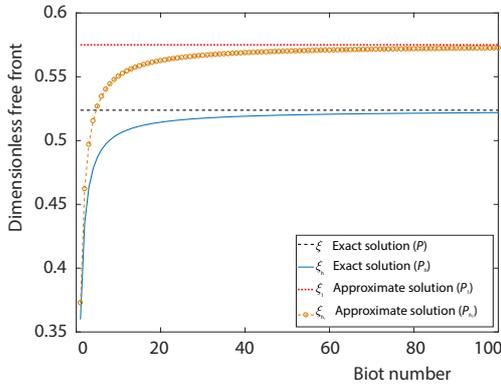


Figure 5. Plot of the dimensionless coefficients ζ_h and ζ_{h_2} against Biot number, for $Ste = 0.5$ and $\lambda = 0.7$

Comparisons between the exact solution ζ_h with the approximate one ζ_{h_2} are shown in fig. 5. We plot them against Biot number for $Ste = 0.5$ and $\lambda = 0.7$. In order that the convergence of $\zeta_h \rightarrow \zeta$ and $\zeta_{h_2} \rightarrow \zeta_2$ when $Bi \rightarrow \infty$, could be appreciated, we also plot ζ and ζ_2 .

Approximate solution using the refined integral method

The refined heat balance integral method in order to solve the problem, P_h , proposes de resolution of an approximate problem, P_{h_3} , formulated by conditions: (3)-(5), (7), and (10). If we propose:

$$u_{h_3}(x,t) = A_{h_3} u_\infty \left(1 - \frac{x}{s_{h_3}(t)}\right) + B_{h_3} u_\infty \left(1 - \frac{x}{s_{h_3}(t)}\right)^2, \quad 0 < x < s_{h_3}(t), \quad t > 0$$

then the free boundary takes the form $s_{h_3}(t) = 2a\zeta_{h_3} t^{1/2}$, $t > 0$ where the constants A_{h_3} , B_{h_3} , and ζ_{h_3} will be determined from the conditions (4), (7), and (10). We obtain:

$$A_{h_3} = \frac{2}{Ste} \zeta_{h_3}^2, \quad B_{h_3} = \frac{-\frac{2}{Ste} \zeta_{h_3}^3 - \frac{1}{Ste Bi} \zeta_{h_3}^2 + \zeta_{h_3}}{\zeta_{h_3} + \frac{1}{Bi}} \tag{23}$$

and $\zeta_{h_3} > 0$ must be a solution of the polynomial equation:

$$-\left(6\lambda + \frac{1}{Bi}\right)z^3 - (6 + Ste)z^2 + \left(6\lambda Ste - \frac{3}{Bi}\right)z + 3Ste = 0, \quad z > 0 \tag{24}$$

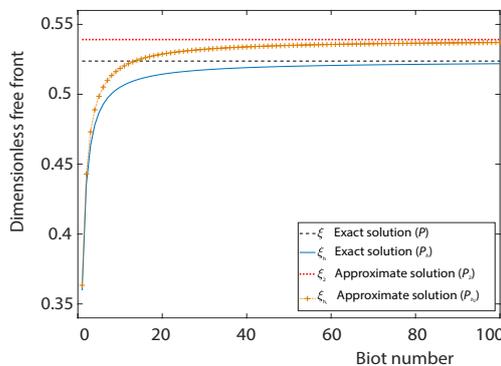


Figure 6. Plot of the dimensionless coefficients ζ_h and ζ_{h_3} against Biot number, for $Ste = 0.5$ and $\lambda = 0.7$

Clearly, by Descartes' rule of signs, we can assure that eq. (24) has a unique positive solution.

In addition, the solution problem, P_{h_3} , converges to the solution problem, P_3 , when $Bi \rightarrow \infty$.

In fig. 6, the coefficient that characterizes the free boundary of the exact solution ζ_h of problem, P_h , is compared with the coefficient ζ_{h_3} that characterizes the free boundary of the approximate problem, P_{h_3} , when we fix $Ste = 0.5$ and $\lambda = 0.7$. We also show the value of ζ and ζ_3 in order to visualize the mentioned convergence when $Bi \rightarrow \infty$.

Comparisons between solutions

Let us compare, for different Biot numbers, the numerical value of the coefficient ζ_h given by eq. (20) and the approximations ζ_{h_1} , ζ_{h_2} , and ζ_{h_3} given by eqs. (21), (22), (24), respectively. In order to obtain which technique gives the best agreement, we display in tab. 2, varying Biot number between 1 and 100, the exact dimensionless free front, and its different approaches, showing also the percentage relative error committed in each case:

$$E_{rel}(\zeta_{h_i}) = 100 \frac{|\zeta_{h_i} - \zeta_h|}{|\zeta_h|}$$

Table 2. Dimensionless free front coefficients and its relative errors

Bi	$\zeta_h(P_h)$	$\zeta_{h_1}(P_{h_1})$	$E_{rel}(\zeta_{h_1})$	$\zeta_{h_2}(P_{h_2})$	$E_{rel}(\zeta_{h_2})$	$\zeta_{h_3}(P_{h_3})$	$E_{rel}(\zeta_{h_3})$
10	0.5051	0.5504	8.965%	0.5185	2.657%	0.5286	4.655%
30	0.5175	0.5667	9.501%	0.5322	2.840%	0.5421	4.745%
50	0.5200	0.5700	9.610%	0.5350	2.878%	0.5448	4.763%
70	0.5211	0.5714	9.657%	0.5362	2.894%	0.5459	4.770%
100	0.5219	0.5725	9.693%	0.5371	2.906%	0.5468	4.776%

From tab. 2, for the fixed values $Ste = 0.5$ and $\lambda = 0.7$, we can appreciate that the error committed in each approximation increases when Biot number becomes greater. We can notice that for the problems, P_{h_1} , P_{h_2} , and P_{h_3} the percentage errors do not exceed 9.693%, 2.906%, and 4.776%, respectively.

Conclusions

In this paper we have considered two different Stefan problems for a semi-infinite material for the non-classical heat equation with a source which depends on the heat flux at the fixed face $x = 0$. The problem, P , with a prescribed constant temperature on $x = 0$ and the problem, P_h , with a convective boundary condition at the fixed face which was studied in this article, proving existence and uniqueness of an exact solution. We have obtained, for $\lambda = 0.7$ that the best approximate solution problem, P , was given by, P_2 , obtaining a relative percentage error that does not exceed 5%. Furthermore the best approximation problem, P_h , was obtained by, P_{h_2} , obtaining a relative error of 2.9%. Therefore, it can be said that in general the optimal approximate technique for solving P and P_h was given by the alternative form of the heat balance integral method, in which the Stefan condition is not removed and remains equal to the exact problem.

In addition it was studied the case when Biot number goes to infinity in the solution the exact problem, P_h , and the approximate problems, P_{h_1} , P_{h_2} , and P_{h_3} , recovering the solutions to the exact problem, P , and the approximate problems P_1 , P_2 , and P_3 . Some numerical simulations were also provided in order to visualize this asymptotic behaviour.

Acknowledgment

The present work has been partially sponsored by the Project PIP No. 0275 from CONICET-UA, Rosario, Argentina, by the Project and ANPCyT PICTO Austral No. 0090, and by the European Union's Horizon 2020 Research and Innovation Programme under the Marie Skłodowska-Curie grant agreement 823731 CONMECH.

Nomenclature

a^2 – thermal diffusivity ($= k/\rho c$), [m^2s^{-1}]

\tilde{A}, \tilde{B} – coefficients in the prescribed temperature profile U , [–]

A_i, B_i	– coefficients in approximate temperature profiles u_i , ($i = 1, 2, 3$), [–]	u_o	– bulk temperature at the fixed face condition (7), [K]
A_{hi}, B_{hi}	– coefficients in approximate temperature profiles profiles u_{hi} , ($i = 1, 2, 3$), [–]	u, u_h	– exact temperature solutions to P and P_h respectively, respectively, [K]
Bi	– Biot number, [–]	u_i, u_{hi}	– approximate temperature solutions to P and P_h respectively, [K]
c	– specific heat capacity, [JK ⁻¹ kg ⁻¹]	x	– space co-ordinate, [m]
E	– function defined by eq. (11), [–]	Greek symbols	
F	– control function defined by (6), [–]	γ	– coefficient in eq. (1), [Wm ⁻³]
f	– function defined by eq. (11), [–]	η	– similarity variable, ($= x/2at^{1/2}$), [–]
h	– heat transfer coefficient at the fixed face in condition (7), [Ws ^{1/2} m ⁻² K]	λ_o	– coefficient that characterizes the control function F , [ms ^{1/2} K ⁻¹]
g	– function defined by (14), [–]	λ	– dimensionless coefficient ($= \gamma\lambda_o/(k\rho c)^{1/2}$), [–]
k	– thermal conductivity, [WK ⁻¹ m ⁻¹]	ζ, ζ_h	– coefficients that characterizes the free boundaries s and s_h , respectively, [–]
l	– latent heat per unit mass, [JKg ⁻¹]	ζ_i, ζ_{hi}	– coefficients that characterizes the free boundaries s_i and s_{hi} , ($i = 1, 2, 3$), [–]
S	– free boundary, [m]	ρ	– mass density, [Kgm ⁻³]
s, s_h	– free boundaries, solutions to problems P and P_h respectively, [m]	Φ	– function, solution of the ordinary differential problem (17)-(19), [–]
s_i, s_{hi}	– approximate free boundaries to problems P and P_h respectively, ($i = 1, 2, 3$), [m]		
Ste	– Stefan number ($= cu_o/l$), [–]		
t	– time, [s]		
U	– temperature, [K]		

References

- [1] Gupta, S., *The Classical Stefan problem. Basic Concepts, Modelling and Analysis*, Elsevier, Amsterdam, Netherlands, 2003
- [2] Tarzia, D., *Explicit and Approximated Solutions for Heat and Mass Transfer Problem with a Moving Interface*, in *Advanced Topics in Mass Transfer*, (Ed. M. El-Amin), InTech Open Access Publisher, Rijeka, Croatia, 2011, pp. 439-484
- [3] Cannon, J. R., Yin, H. M., A Class of Non-Linear Non-Classical Parabolic Equations, *Journal of Differential Equations*, 79 (1989), 2, pp. 266-288
- [4] Briozzo, A., Tarzia, D., Exact Solutions for Non-classical Stefan Problems, *International Journal of Differential Equations*, 2010 (2010), ID868059
- [5] Tarzia, D., Relationship between Neumann Solutions for Two-Phase Lamé-Clapeyron-Stefan Problems with Convective and Temperature Boundary Conditions, *Thermal Science*, 21 (2017), 1A, pp. 187-197
- [6] Zubair, S., Chaudhry, M., Exact Solutions of Solid-Liquid Phase-Change Heat Transfer When Subjected to Convective Boundary Conditions, *Heat and Mass Transfer*, 30 (1994), 2, pp. 77-81
- [7] Goodman, T., The Heat Balance Integral Methods and Its Application Problems Involving a Change of Phase, *Transactions of the ASME*, 80 (1958), pp. 335-342
- [8] Bollati, J., et al., Heat Balance Integral Methods Applied to the One-Phase Stefan Problem with a Convective Boundary Condition at the Fixed Face, *Applied Mathematics and Computation*, 331 (2018), Aug., pp. 1-19
- [9] Hristov, J., Research Note on a Parabolic Heat-Balance Integral Method with Unspecified Exponent: An Entropy Generation Approach in Optimal Profile Determination, *Thermal Science*, 13 (2009), 2, pp. 49-59
- [10] Mitchell, S., Applying the Combined Integral Method to 1-D Ablation, *Applied Mathematical Modelling*, 36 (2012), 1, pp. 127-138
- [11] Mitchell, S., Myers, T., Application of Heat Balance Integral Methods to 1-D Phase Change Problems, *International Journal of Differential Equations*, 2012 (2012), ID187902
- [12] Hristov, J., Multiple Integral-Balance Method: Basic Idea and Example with Mullin's Model of Thermal Grooving, *Thermal Science*, 21 (2017), 3, pp. 1555-1560
- [13] MacDevette, M., Myers, T., Nanofluids: An Innovative Phase Change Material for Cold Storage Systems, *International Journal of Heat and Mass Transfer*, 92 (2016), Jan., pp. 550-557
- [14] Hristov, J., An Approximate Analytical (Integral-Balance) Solution a Non-Linear Heat Diffusion Equation, *Thermal Science*, 19 (2015), 2, pp. 723-733
- [15] Fabre, A., Hristov, J., On the Integral-Balance Approach to the Transient Heat Conduction with Linearly Temperature-Dependent Thermal Diffusivity, *Heat Mass Transfer*, 53 (2017), Apr., pp. 177-204

- [16] Hristov, J., Integral Solutions to Transient Non-Linear Heat (Mass) Diffusion with a Power-Law Diffusivity: A Semi-Infinite Medium with Fixed Boundary Conditions, *Heat Mass Transfer*, 52 (2016), May, pp. 635-655
- [17] Hristov, J., Integral-Balance Solution a Non-Linear Subdiffusion Equation, in: *Frontiers in Fractional Calculus*, (Ed. S. Bhalekar), Bentham Publishing, Sharjah, UAE, 2017, pp. 71-106
- [18] Wood, A., A New Look at the Heat Balance Integral Method, *Applied Mathematical Modelling*, 25 (2001), 10, pp. 815-824
- [19] Sadoun, N., *et al.*, On the Refined Integral Method for the One-Phase Stefan Problem with Time-Dependent Boundary Conditions, *Applied Mathematical Modelling*, 30 (2006), 6, pp. 531-544
- [20] Solomon, A., An Easily Computable Solution a Two-Phase Stefan Problem, *Solar Energy*, 23 (1979), 6, pp. 525-528