

NUMERICAL SIMULATION OF THE TEMPERATURE FIELDS IN THE SHIELDING WALLS OF FROZEN SOIL WITH MULTI-CIRCLE-PIPE FREEZING IN SHAFT SINKING

by

Yugui YANG^{a,b*}, Mengke LIAO^c, Haibing CAI^d, and Peijian CHEN^b

Original scientific paper
<https://doi.org/10.2298/TSCI180512077Y>

^a State Key Laboratory for Geomechanics and Deep Underground Engineering,
China University of Mining and Technology, Xuzhou, Jiangsu, China

^b School of Mechanics and Civil Engineering,

China University of Mining and Technology, Jiangsu, China

^c Economic Research Institute, State Grid Xinjiang Electric Power Company, Urumqi, China

^d School of Civil Engineering and Architecture,

Anhui University of Science and Technology, Huainan, Anhui, China

In this study, the temperature fields of frozen soil wall were calculated by using numerical method, and were analyzed after the soil was actively frozen with different freezing time. The results showed that the temperature field evolved from the freezing pipes, and then formed into frozen soil cylinders. After a certain freezing duration, the cylinders of frozen soil began to connect, and frozen soil walls started to form. At initial freezing stage, the thickness of frozen soil wall was mainly determined by the freezing pipes of the inner two circles. Then, connections were found to have occurred between the inner and outer frozen soil walls. Finally, the temperature fields of the unfrozen and frozen soils reached a state of stability. The results also showed that it was feasible to use numerical method to simulate the temperature fields of frozen soil walls during shaft sinking process, and potentially provided important references for the design and construction of deep alluvium shaft.

Keywords: frozen soil, temperature field, shaft, heat transfer

Introduction

The artificial ground freezing method is an important construction technique which changes the pore water into ice to improve the combination of soil particles by using the refrigeration system and provide protection from the seepage of groundwater. It is not limited by the soil materials and the depth of working stratum. The frozen soil wall can be formed any shape in engineering application. This method has the advantages of adaptability of stratum, high cohesive strength of soil particle, low environmental influence, and high water-sealing performance. The artificial freezing method was first developed in Germany by Poetsch (1883), and has been widely used in many geotechnical engineering applications, such as excavation support, pollution control, and groundwater cutoff [1-4]. Compared with other groundwater cutoff and excavation support techniques, the artificial freezing method has minimal effects on the subsidence disturbances of ground surfaces and adjacent buildings [5-7].

* Corresponding author, e-mail: ygyang2009@126.com

Frozen soil wall can be formed by installing freezing pipes in the ground, and then extracting heat from the soil surrounding the pipes by circulation of a cooling liquid. The freezing pipes in the soil are usually connected in parallel series. The cooling liquid is pumped into the frozen zone, and circulates in the freezing pipes when it is cooled again [1, 8]. It is essential to design a proper freezing scheme to ensure the safety of engineering practice. The strength and thickness of frozen soil wall are related to the distribution of temperature field. The temperature field is usually used to assess the feasibility of the proposed freezing scheme. The research on the temperature fields of frozen soil wall in shaft sinking process is a key issue in the development of artificial freezing engineering. Many researches regarding the temperature fields of artificial freezing engineering have been performed [9-13].

The applications of the artificial ground freezing method become more and more common in geotechnical engineering. There remains a need to study the temperature fields of deep alluvium shaft due to the diversities of geology environment and mechanical properties of soil materials. In this study, we take a mine shaft project of Yancon as the research object. The mine shaft had been proposed to be constructed by using artificial freezing method. The analysis of temperature field by using numerical method is performed for the artificial freezing engineering. The results can provide important references for the design and construction of the deep alluvium shafts.

The governing differential equations

The calculation of the temperature fields for frozen soil wall is a non-linear problem related to heat transference and the phase change. The soil can be classified into frozen and unfrozen states controlled by temperature. The unified governing partial differential equation of heat conduction for temperature $T(x, y, z, t)$ can be expressed [14-16]:

$$C^* \frac{\partial T}{\partial t} = \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left(k \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left(k \frac{\partial T}{\partial z} \right) \quad (1)$$

where C^* represents the equivalent heat capacity and k is the equivalent thermal conductivity.

To be convenient for calculation, the process of phase change can be defined within a temperature interval ($T_d \leq T \leq T_r$) based on the method of sensible heat capacity. The equivalent heat capacity and equivalent heat conductivity can be determined according to eqs. (2) and (3), respectively, and the effect of the temperature intervals of phase change has been considered. The equations can be expressed [17, 18]:

$$C^* = \begin{cases} C_f & (T < T_d) \\ \frac{C_f + C_u}{2} + \frac{L}{T_r - T_d} & (T_d \leq T \leq T_r) \\ C_u & (T > T_r) \end{cases} \quad (2)$$

$$k = \begin{cases} k_f & (T < T_d) \\ k_f + \frac{k_u - k_f}{T_r - T_d} (T - T_d) & (T_d \leq T \leq T_r) \\ k_u & (T > T_r) \end{cases} \quad (3)$$

where C_f is the heat capacity of frozen soil, C_u – the heat capacity of unfrozen soil, L – the latent heat of soil material, T_r – the upper limit temperature of the phase change,

T_d – the low limit temperature of the phase change, k_f represents the thermal conductivity of frozen soil, and k_u – the thermal conductivity of unfrozen soil.

The initial temperature field and remote boundary condition of the model can be determined by the ground temperature:

$$T(x, y, z, t_0) = T_0 \quad (4)$$

$$T(x, y, z)|_{\rho=\rho_0} = T_0 \quad (5)$$

The boundary condition surrounding freezing pipe can be regarded as a constant temperature:

$$T(x, y, z)|_{r=r_0} = T_s \quad (6)$$

where T_s is the temperature of freezing pipe.

The finite element formula of the temperature field is given by the following equation:

$$[M] \left\{ \frac{\partial T}{\partial t} \right\} + [K] \{T\} = \{F\} \quad (7)$$

where

$$M_{ij} = \sum \int_{\Omega^e} C^* N_i N_j d\Omega \quad (8)$$

$$K_{ij} = \sum \int_{\Omega^e} k \left(\frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right) d\Omega \quad (9)$$

Equations (1)-(9) represent the governing differential equations, the initial and boundary conditions of the temperature field in the artificial ground freezing shaft.

The project background and numerical model

The design requirement of the freezing schemes is to ensure that the thickness and strength of frozen soil wall are thick and strong enough to effectively protect working place from the seepage of groundwater, and have the ability to resist deformation caused by the excavation in construction process. In this study, a mining shaft of Yancon is chosen as a computational model to analyze the distribution and evolution characteristics of temperature fields. The depth of the alluvium reaches more than 500 m. Due to high ground pressure, there are many difficulties during the construction process. The artificial freezing method is used to reduce the construction influences on the excavation operations of shaft lining construction and ensure the effectiveness of water-sealing during the engineering construction. The numerical method is a convenient and accurate method to solve the problem.

In this study, the shaft with different freezing durations is taken as the study object to analyze the evolution of temperature field. For simplification purpose, the model can be simplified as a plane heat conduction problem to compute the temperature field according to the freezing scheme presented previously, as shown in fig. 1.

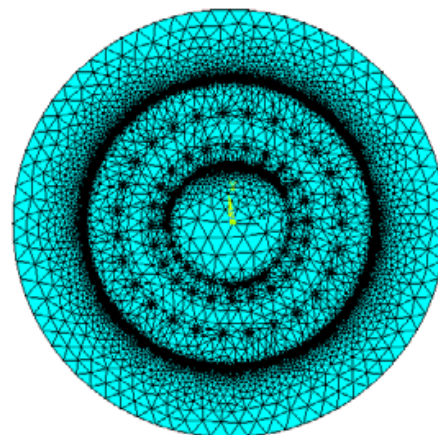


Figure 1. Computational model of the freezing shaft

The brine temperature is a constant temperature of $-30\text{ }^{\circ}\text{C}$. The remote ground boundary is set as a constant temperature of $21\text{ }^{\circ}\text{C}$, which is also regarded as initial ground temperature. According to the practical project experience, the heat transfer coefficient is 1.32 W/mK for the unfrozen soil, and 1.69 W/mK for the frozen soil. The heat capacity is $1840\text{ J/kg}^{\circ}\text{C}$ for the unfrozen soil, and $1600\text{ J/kg}^{\circ}\text{C}$ for the frozen soil. The latent heat of soil material is $6.0 \cdot 10^6\text{ J/m}^3$.

Results and analyses

The evolution characteristics of temperature fields with different freezing durations are analyzed to obtain the freezing process. The temperature fields with freezing time of 10, 60, 120, and 240 days are illustrated in figs. 2(a)-2(d), respectively.

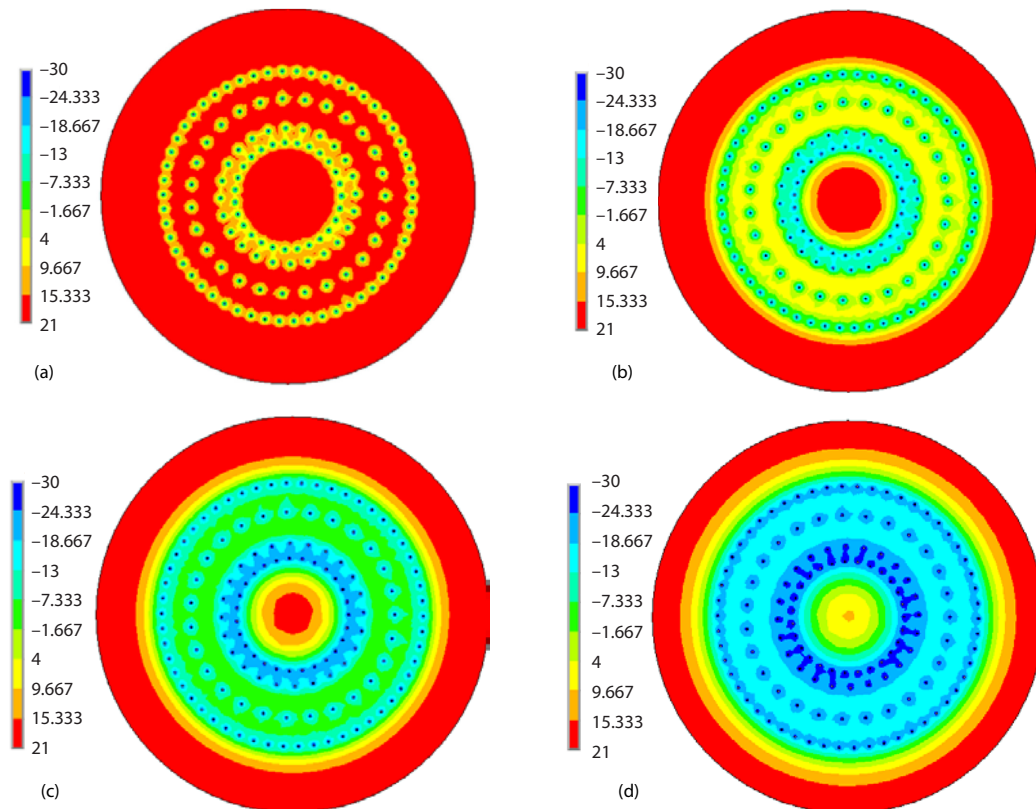


Figure 2. Temperature fields of the frozen soil wall after different freezing durations; (a) 10 days, (b) 60 days, (c) 120 days, and (d) 240 days

It is observed that the temperature fields of frozen soil wall evolve from each freezing pipe and then frozen cylinders of soil form surrounding the freezing pipes. With the increase of freezing time, the frozen cylinders begin to connect. A closed frozen soil wall is observed to have formed after the freezing process has continued for 60 days. With the further increase in freezing time, the average temperature of the frozen soil wall continues to decrease. Also, the thickness of the wall continues to increase as further connections of frozen cylinders are made. Temperature distributions with different freezing times along the radius of mining shaft are shown in figs. 3 and 4. It can be seen that the frozen soil wall is initially formed between the inner two circles of

freezing pipes and then, the thickness of frozen soil wall increases with the increase of freezing time. The temperature of the external wall of frozen soil gradually decreases due to the ground heating conduction from outside of frozen soil wall after freezing 180 days. The temperature of inner wall rapidly decreases due to the lack of heating supply from the ground.

The evolution process of the thickness of the frozen soil wall is shown in fig. 5. It can be seen that the thickness of the frozen soil wall is significantly affected by the freezing time. During the initial freezing stage, the frozen cylinders surrounding freezing pipes of inner two circles are observed to influence each other. The increase of freezing time results in the formation of a closed frozen soil wall, and the growth of thickness following the closure of frozen soil wall. The thickness of the frozen soil wall is mainly affected by the inner two circles of freezing pipes. It is also observed that, with the further increases of freezing time, the connections of frozen soil walls between the inner and outer circles of freezing pipes occur. The thickness of frozen soil wall increases to about 17.7 m. The temperature fields of unfrozen and frozen soils reach an approximate equilibrium state.

Conclusion

In this study, the artificial freezing process of shaft is simulated by numerical method, and the temperature field of frozen soil wall is analyzed. At the initial freezing stage, the decrease rate of soil temperature surrounding freezing pipes is found to be rapid and then gradually decreases with the further increase in freezing time. The temperature in the center of mining shaft is observed to have slowly decreased during the initial freezing stage and then rapidly decreases with the further increase in freezing time. It is found to take, approximately 60 days for a minimum thickness of frozen soil wall to form, and the thickness is about 2.8 m. The temperatures of the inner and outer frozen soil wall are approximately 2.1 °C and -6.3 °C, respectively. When freezing time reaches 240 days, the temperatures of the inner and outer frozen soil wall have decreased to -14.6 °C and -16.8 °C, respectively.

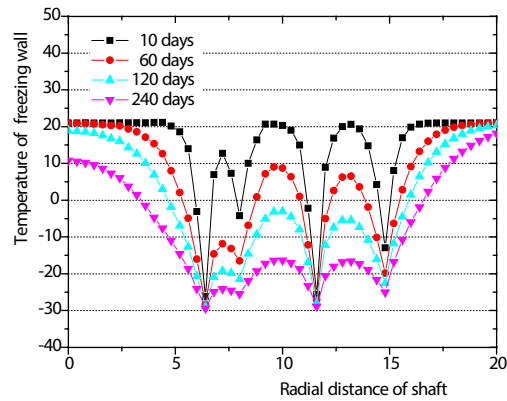


Figure 3. Temperature distributions along a radius from the center of shaft

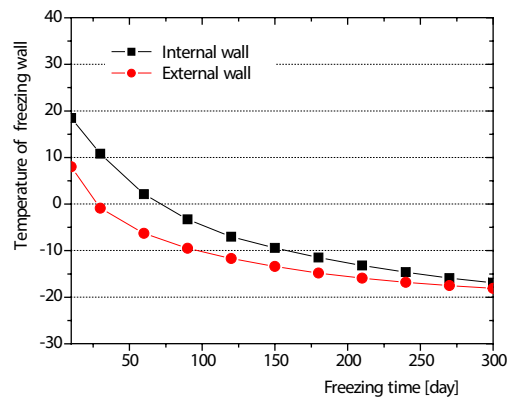


Figure 4. The temperature evolution characteristics of frozen soil wall

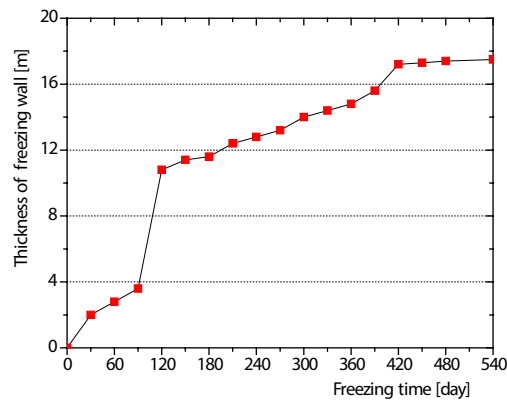


Figure 5. The thickness of frozen soil wall vs. freezing time

Acknowledgment

This research study was supported by the National Natural Science Foundation of China (51574219, 41871063), and the National Natural Science Foundation of China (51778004, 51604263).

Nomenclature

C	– heat capacity, [$\text{Jkg}^{-1}\text{C}^{-1}$]	T	– temperature, [$^{\circ}\text{C}$]
k	– thermal conductivity, [$\text{Wm}^{-1}\text{K}^{-1}$]	t	– time, [s]
M, T	– matrices, [–]	x, y, z	– co-ordinate axis, [m]

References

- [1] Chang, D. K., Lacy, H. S, Artificial Ground Freezing in Geotechnical Engineering, *Proceedings*, 6th International Conference on Case Histories in Geotechnical Engineering, Arlington, Va., USA, 2008
- [2] Ma, W., Review and Prospect of the Studies of Ground Freezing Technology in China, *Journal of Glaciology and Geocryology*, 24 (2001), 3, pp. 218-224
- [3] Li, S. Y., et al., Minimum Ground Pre-Freezing Time before Excavation of Guangzhou Subway Tunnel, *Cold Regions Science and Technology*, 46 (2006), 3, pp. 181-191
- [4] Wang, D. Y., et al., Study on the Resistance to Deformation of Artificially Frozen Soil in Deep Alluvium, *Cold Regions Science and Technology*, 42 (2005), 3, pp. 194-200
- [5] Cui, G. X., Mechanics of Frozen Soil for Deep Alluvium – A New Field of Frozen Soil Mechanics, *Journal of Glaciology and Geocryology*, 20 (1998), 2, pp. 97-100
- [6] Zhang, X. F., et al., Non-Linear Analysis for the Freezing-Thawing Situation of the Rock Surrounding the Tunnel in Cold Regions under the Conditions of Different Construction Seasons, Initial Temperatures and Insulations, *Tunneling and Underground Space Technology*, 17 (2002), 3, pp. 315-325
- [7] Tang, G. Z., Wang, X. H., Effect of Temperature Control on Tunnel in Permafrost, *Tunneling and Underground Space Technology*, 22 (2007), 4, pp. 483-488
- [8] Leung, C. K., et al., Application of Artificial Ground Freezing Method for Tunnel Construction in Hong Kong, A Construction Case in the Harbour Area Treatment Scheme Stage 2A, *Proceedings*, HKIE Civil Division International Conference, Kowloon, Hong Kong, 2012
- [9] Zhang, Z., Zeng, D. H., Numerical Analysis of Temperature Field of Vertical Frozen Soil Wall Reinforcement at Shield Shaft, *Advanced Materials Research*, 918 (2014), Apr., pp. 218-223
- [10] Hu, J., et al., Numerical Analysis of Temperature Field of Cup-Shaped Frozen Soil Wall Reinforcement at Shield Shaft, *Applied Mechanics and Materials*, 341-342 (2013), July, pp. 1467-1471
- [11] Hu, J., et al., Temperature Field Numerical Analysis of Different Freeze Pipe Spacing of Vertical Frozen Soil Wall Reinforcement at Shield Shaft, *Applied Mechanics and Materials*, 580-583 (2014), July, pp. 738-741
- [12] Hu, X. D., Wang, Y., Analytical Solution of Three-Row-Pipe Frozen Temperature Field by Means of Superposition of Potential Function, *Chinese Journal of Rock Mechanics and Engineering*, 31 (2012), 5, pp. 1071-1080
- [13] Hu, X. D., et al., Analytical Solution of Steady-state Temperature Field of a Few Freezing Pipes Arranged Near a Right Angle Adiabatic Boundary, *Journal of Zhejiang University (Engineering Science)*, 48 (2014), 3, pp. 471-477
- [14] Mi, L., et al., The 3-D Non-Linear Analyses for Temperature Field of Ventilate Embankment in Cold Regions, *Journal of Glaciology and Geocryology*, 24 (2002), 6, pp. 765-769
- [15] Li, G. Y., et al., Numerical Simulation Analysis of Adjustable Ventilated Embankment of Qinghai-Tibet Railway, *Journal of Glaciology and Geocryology*, 26 (2004), S1, pp. S108-S114
- [16] Han, L. M., et al., The 2008, Study on Cooling Effect of Ballast Embankment of Qinghai-Tibet Railway in the Wudaoliang Area, *Journal of Beijing Jiaotong University*, 32 (2008), 4, pp. 98-102
- [17] Sun, B. X., et al., Numerical Analysis for Critical Thickness of Crushed Rock Revetment Layer on the Qinghai-Tibet Railway, *Cold Regions Science and Technology*, 57 (2009), 2-3, pp. 131-138
- [18] Cai, H. B., et al., Finite Element Analysis on 3-D Freezing Temperature Field in Metro Connected Aisle Construction, *Journal of Railway Science and Engineering*, 12 (2015), 6, pp. 1436-1443