

## IMPACT OF POINT THERMAL BRIDGES ON THERMAL PROPERTIES OF BUILDING ENVELOPES

by

**Jolanta SADAUSKIENE\***, **Juozas RAMANAUSKAS**, and **Algimantas VASYLIUS**

Faculty of Civil Engineering and Architecture, Kaunas University of Technology, Kaunas, Lithuania

Original scientific paper  
<https://doi.org/10.2298/TSCI180719299S>

*During the design of energy-efficient buildings with a ventilated façade systems, the evaluation of point thermal transmittance is complicated. It requires additional theoretical knowledge, special software and skills to use it. Because of that, point thermal transmittance is often ignored in practice. The dependence of point thermal transmittance, which is appearing because of aluminum fixing elements used in the insulated wall with ventilated façade system, from the thermal and geometrical properties of construction layers are analyzed in this paper. Research has shown, that thermal properties of the supporting wall, where fixing element is located, had the biggest influence on the point thermal transmittance. When thermal conductivity of the supporting wall was increasing, as well as a thickness of the insulation layer, a value of thermal bridge was increasing in a non-linear way. For this reason, the thermal transmittance coefficient of all construction could increase up to 35%. When the thickness of the supporting wall and thermal conductivity of the insulation layer was increased, the value of point thermal bridge was decreasing. The tests revealed strong dependency of the point thermal bridge on the thermal conductivity of bearing layer material and the thickness of the bearing layer of wall. For this reason, thermal bridges should receive greater consideration. It is not enough to use the diagrams of typical fasteners that very often do not take into account the exact thickness and thermal characteristics of materials*

Key words: *thermal bridge, point thermal transmittance, energy efficiency, ventilated façade systems*

### Introduction

In the design of energy-efficient buildings according to the requirements of Directive 2010/31/ES (EPBD) [1], it is necessary to identify and to evaluate the factors that increase the energy losses of the building. One of such factors are thermal bridges where thermal resistance of the building envelope is significantly changed by full or partial penetration of the building envelope by materials with a different thermal conductivity, and/or a change in thickness of the fabric, and/or a difference between internal and external areas, such as occur at wall/floor/ceiling junctions [2]. According to references, the total impact of thermal bridges on the heating energy need is considerable and can vary from 5% to 42% [3-6]. This influence depends on weather conditions, level of insulation, the thermal bridges constructive solution, type of building (use and geometry) and of the method used to implement its effect within the calculation of the building energy demand [7-12].

\* Corresponding author, e-mail: [jolanta.sadauskiene@ktu.lt](mailto:jolanta.sadauskiene@ktu.lt)

Usually, in the calculations of the building energy demand, the liner thermal bridges are evaluated, which occur at the junction between two or more elements of the building envelope. Several scientific studies have been carried out, where liner thermal bridges have been investigated by different calculation and simulation methodologies, such as static/dynamic and 1-D, where is showing only linear information; 2-D, where is showing two dimensions, such as width and height; 3-D, where is showing three dimensions, such as width, height and thickness (1-D/2-D/3-D) [13-21].

But in terms of point thermal bridges, the effect of the point thermal bridges is often neglected in the analyses aimed at defining the building energy performance. Regardless, it is an important factor in the design of energy-efficient buildings. This is very important during the design of buildings with ventilated façade systems, where profiles of thermal insulation panels are fixed directly to the supporting wall or brackets are used in order to reduce the influence of thermal bridge to the properties of thermal insulation layer.

Studies show, that if solid metal profiles (which are crossing thermal insulation layer) are used for the fixing of thermal insulation, thermal resistance might be reduced twice [22-27]. If these additional heat losses, because of point thermal transmittance, are not evaluated or evaluated incorrectly, building's energy efficiency might be determined improperly and there might be problems with selection of power of heating systems, when required indoor temperature conditions will not be ensured because of extreme temperature differences between the outdoors and indoors.

In practice, in order to know the true value of a point thermal bridge one has to perform numerical simulations or experimental measurements with a specific construction. However, during the design of buildings the assessment of point thermal transmittance is difficult without special software.

The aim of this work was to evaluate the point thermal transmittance ( $\chi$ -value) of aluminum fixing element (which is crossing thermal insulation layer); obtain empirical dependence which would help to predict the point thermal transmittance ( $\chi$ -value) according to the following factors: thickness of the thermal insulation material, value of thermal conductivity coefficient of thermal insulation layer and type of the supporting construction material.

### Assessment of the point thermal bridges

The point thermal transmittance of the thermal bridges,  $\chi$ , is calculated according to the requirements of EN ISO 10211 [2]. The eq. (1) is given:

$$\chi = L_{3-D} - \sum_{i=1}^{N_i} U_i A_i - \sum_{j=1}^{N_j} \Psi_j l_j \quad (1)$$

To determine the point thermal transmittance  $\chi$ -value of a fastener by 3-D methodology, specific heat losses through repeated surface area with a fastener  $H$  and without a fastener  $H_s$  are calculated. The difference between these specific heat losses is the point thermal transmittance  $\chi$ -value:

$$\chi = H - H_s \quad (2)$$

Since fasteners penetrate the insulation layer in local areas, their influence on heat transfer is evaluated by point thermal transmittance. If this point thermal transmittance is repetitive in the envelope, they can be evaluated using the transmittance correction factor  $\Delta U$ , eq. (3), taking into account their number in 1 m<sup>2</sup> of the envelope or fasteners density per certain surface area of the envelope:

$$\Delta U = \chi n \quad (3)$$

Then the thermal transmittance  $U$ -value of the envelope can be determined from EN ISO 6946 [28]:

$$U = U_i + \Delta U \quad (4)$$

Calculations of  $U_i$ -values follow national requirements [29].

The 3-D temperature field calculation program HEAT3 was used for the determination of the point thermal transmittance ( $\chi$ -value).

Ventilated façade system with aluminum fixing elements was chosen for the calculations, fig. 1. Fixing brackets of 3 mm wall thickness and 40 mm width were used. The plastic gas-gaskets of 5 mm thickness were inserted between the fixing bracket and the wall. The distance between the axes of aluminum framework elements was 600 mm in horizontal and vertical planes. A typical element of the framework according to the axes of symmetry was  $600 \times 600$  mm with fixing brackets in the middle, fig. 2. The surface area of such framework element was  $0.36 \text{ m}^2$ , and the number of fixing brackets per  $1 \text{ m}^2$  of the wall area was:  $n = 2.778 \text{ pcs./m}^2$ . The thermal conductivity coefficient of aluminum fixing elements was  $160 \text{ W/mK}$ .

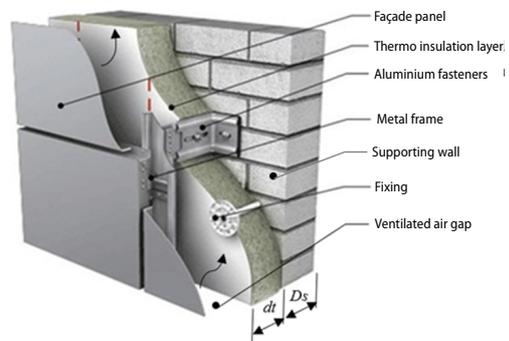


Figure 1. The principal scheme of the ventilated façades with aluminum fixing element

The point thermal transmittance  $\chi$ -value of aluminum fastener and the relationship between this value and the properties of other materials included in the structure was calculated for different variants of the structure by changing the thermal conductivity and thickness of the supporting and insulation layers, tab. 1.

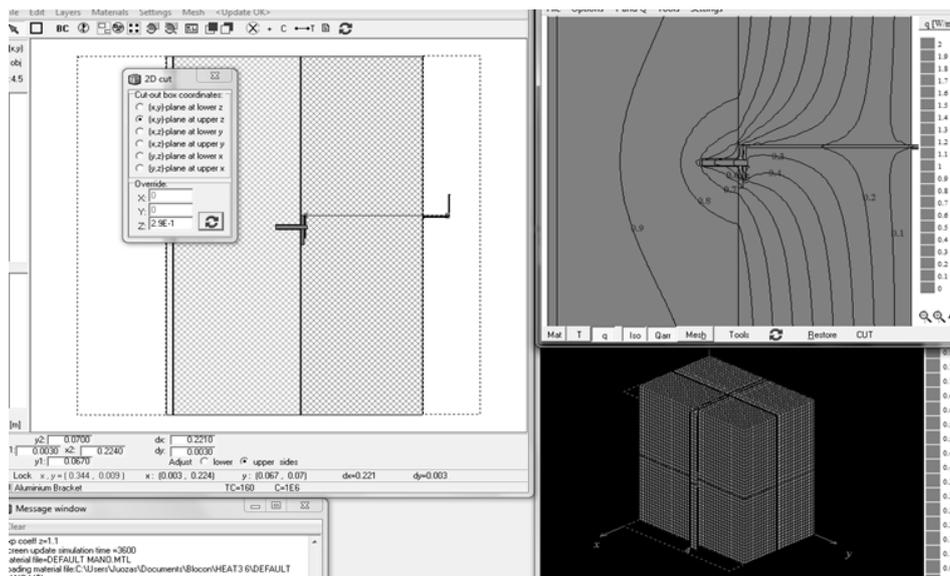


Figure 2. Calculation scheme of the thermal bridge of fixing element

**Table 1. Variations of calculated parameters**

Properties	$D_s$	$\lambda_s$	$d_t$	$\lambda_t$
Variants	[mm]	[Wm <sup>-1</sup> K <sup>-1</sup> ]	[mm]	[Wm <sup>-1</sup> K <sup>-1</sup> ]
0 (Basic data)	200	0.5	150	0.034
1	200	0.1-1	150	0.034
2	50-500	0.5	150	0.034
3	200	0.5	150	0.030-0.040
4	200	0.5	100-200	0.034

For the analyses of point thermal bridges basic construction variant was selected: thickness of the supporting wall  $D_s = 200$  mm, thermal conductivity of the supporting wall  $\lambda_s = 0.5$  W/mK, thickness of the insulation layer  $d_t = 150$  mm, thermal conductivity of the insulation layer  $\lambda_t = 0.034$  W/mK.


## Results

### *Evaluation of the dependence of point thermal bridge*


After determining the trend of heat flow behaviour through fastener was calculated the thermal transmittance  $\chi$ -values, while has been changed values of: thermal conductivity of supporting layer; the supporting layer thickness; thermal conductivity of thermal insulation layer; the thermal insulation layer thickness.

Figure 3 illustrates the relationship between the fastener's thermal transmittance  $\chi$ -value and thermal conductivity of the supporting layer material (Variant 1, tab.1). If the thermal conductivity  $\lambda_s$  of the supporting layer material is increased, the influence of the  $\chi$ -value to total wall's thermal transmittance is increased. The chart shows that when  $\lambda_s$ -value of the supporting layer' material increases from 0.1 to 1.0 W/mK, the  $\chi$ -value increases from 0.008 to 0.039 W/K, *i. e.* almost 5 times. That means, the influence of the fasteners on the  $U$ -value of the entire wall will increase from 13% to 35%.

Figure 4 shows the change in the point thermal transmittance with the change of the supporting layer thickness from 50 mm to 500 mm (Variant 2, tab.1). It was determined that with the increase in the thickness of the supporting layer of the wall the  $\chi$ -value reduces from 0.034 to 0.022 W/K. The influence of the fasteners on the  $U$ -value of the entire wall will drop

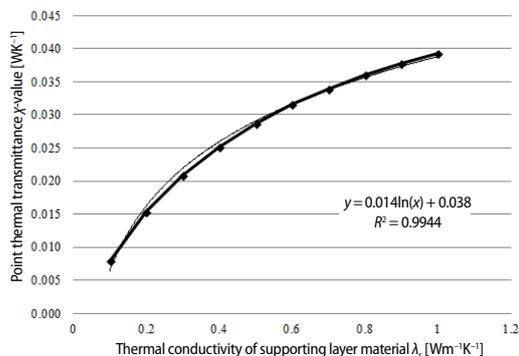

**Figure 3. Relationship between the calculated  $\chi$ -value of the fastener and the  $\lambda_s$ -value of the supporting layer material**

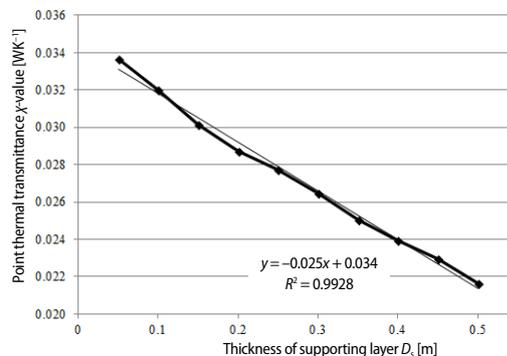


**Figure 4. Relationship between the calculated  $\chi$ -value and the  $D_s$ -value of the supporting layer of wall**


from 31% to 25%. In this case, the increase in the thickness of the supporting layer of the wall by 100 mm reduces  $\chi$ -value by approximately 10%.

Figure 5 illustrates the change in the point thermal transmittance with the change of thermal insulation material thermal conductivity  $\lambda_t$  from 0.030 to 0.040 W/mK (Variant 3, tab. 1). It was determined that with the increase of the thermal conductivity coefficient of thermal insulation material, the  $\chi$ -value drops from 0.029 to 0.028 W/K and the influence of the fasteners on the  $U$ -value of the entire wall will drop from 31% to 26%. In this case, the increase in the value of thermal insulation material thermal conductivity coefficient by 0.01 W/mK reduces the point thermal transmittance by approximately 4%.

Figure 6 illustrates the change in the point thermal transmittance with the change in the thickness of thermal insulation material  $d_t$  from 100 mm to 200 mm (Variant 4, tab. 1). It was determined that with the increase in  $d_t$  the  $\chi$ -value increases from 0.027 to 0.029 W/K and the influence of the fasteners on the  $U$ -value of the entire wall will increase from 21% to 35%. In this case, the increase in the thickness of thermal insulation material from 100 mm to 200 mm increases  $\chi$ -value by approximately 7%.

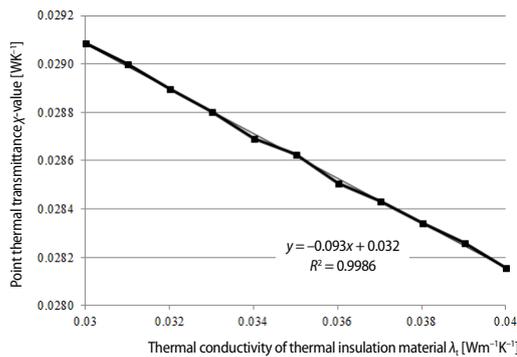

**Figure 5. Relationship between the calculated  $\chi$ -value and  $\lambda_t$ -value of thermal insulation material**

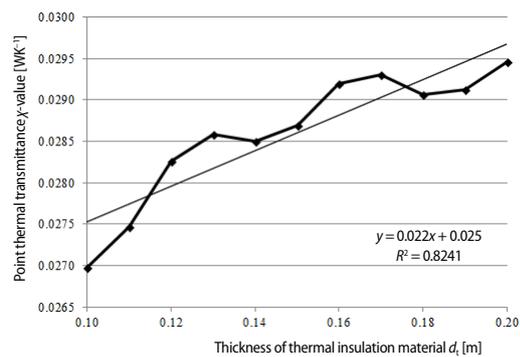

**Figure 6. Relationship between the calculated  $\chi$ -value and  $d_t$ -value of thickness of thermal insulation layer**

#### Functional dependency of point thermal bridge

The previous chapter described the dependency of thermal bridges created by the fasteners of walls with ventilated façades system on thermal conductivity coefficient and thickness of the bearing layer material as well as on thermal conductivity coefficient) and thickness of thermal insulation material. If the left-side values of equations (which are presented on fig. 3-6) are the same, the general functional dependency may be expressed:

$$\chi = \begin{cases} 0.038 + 0.014 \ln(\lambda_s) \\ 0.034 - 0.025 D_s \\ 0.032 - 0.093 \lambda_t \\ 0.025 + 0.022 d_t \end{cases} \quad (5)$$

The solution of this equations system gives a mathematical expression:

$$\chi = 0.041 + 0.4(\lambda_s) - 0.025(D_s) - 0.016(\lambda_t) + 0.022(d_t) \quad (6)$$

This eq. (6) allows for prediction the value of point thermal bridges, which depend on different parameters of the external wall (thickness of the layers and thermal properties of the materials).

The reliability of the formula was verified by separate calculations. The results of the comparison of the point thermal transmittance values calculated by two methods (of HEAT3 simulation and calculation according to eq. (6)) are given in fig. 7. The result shows the eq. (6) is suitable to forecast the values of thermal bridges according to thermal and geometrical properties of the structure using the aluminum fixing element with defined dimensions.

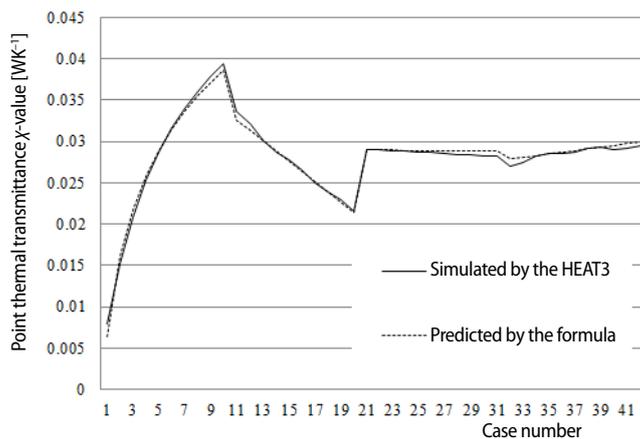


Figure 7. The values of point thermal transmittance determined by means of HEAT3 simulation and by means of eq. (6)

## Conclusions

The results of investigation show that the influence of the point thermal bridges to the  $U$ -value of the entire wall may achieve average to 30% regarding thermal properties of materials, which are used in external walls layers and dimension of layers. This conclusion is important for the design of energy-efficient buildings.

The tests have shown that increase of thermal conductivity of the material of the supporting layer and the thickness of thermal insulation layer may increase  $U$ -value of the entire wall up to 35% as a result of the effect of point thermal bridge.

The point thermal bridge may decrease  $U$ -value of the entire wall up to 28% regarding the increase of supporting layer thickness and using insulation materials with higher thermal conductivity.

Knowing the functional dependency of point thermal transmittance values on the thermal properties of fastener materials and fastener dimensions it is possible to calculate the specific point thermal bridge by means of simplified calculation by using the empirical relationship, eq. (6).

## Acknowledgment

This work has been supported by Basic Science Research Programme through the Kaunas Technology University (KTU) and funded by the Ministry of Environment of the Republic of Lithuania.

## Nomenclature

$A$	– area of element $i$ of the building envelope, [m <sup>2</sup> ]	$H$	– specific heat losses through repeated surface area with a fastener, [WK <sup>-1</sup> ]
$D$	– thickness of the supporting layer, [m]	$l$	– length within the 2-D geometrical model over which the value of $U$ applies, [m]
$d$	– thickness of the thermal insulation layer, [m]		
$H_S$	– specific heat losses through repeated surface area without a fastener, [WK <sup>-1</sup> ]		

$L$	– thermal coupling coefficient obtained from a 3-D calculation of the component separating the two environments being considered, [–]	<i>Greek letters</i>	
$N$	– number of components, [–]	$\lambda$	– thermal conductivity coefficient, [ $\text{Wm}^{-1}\text{K}^{-1}$ ]
$n$	– number of fasteners per surface area, [ $\text{pcsm}^{-2}$ –1]	$\Psi$	– linear thermal transmittances of linear thermal bridge, [ $\text{Wm}^{-1}\text{K}^{-1}$ ]
$U_i$	– thermal transmittance of element $i$ of the building envelope, [ $\text{Wm}^{-2}\text{K}^{-1}$ ]	$\chi$	– point thermal transmittance of the point thermal bridge, [ $\text{WK}^{-1}$ ]
$U$	– thermal transmittance of the building envelope, [ $\text{Wm}^{-2}\text{K}^{-1}$ ]	<i>Subscripts</i>	
$\Delta U$	– transmittance correction factor, [ $\text{Wm}^{-2}\text{K}^{-1}$ ]	3-D	– 3-D calculation of the component
		$i$	– 1-D component
		$j$	– 2-D component
		s	– supporting layer of wall
		t	– thermal insulation materials

## References

- [1] \*\*\*, European Commission, Directive 2010/31/EU of the European Parliament and of the Council of 19<sup>th</sup> May 2010 on the energy performance of buildings, <http://eurlex.europa.eu/legalcontent/EN/ALL/?uri=CELEX:32010L0031>
- [2] \*\*\*, EN ISO 10211:2008, Thermal Bridges in Building Construction – Heat Flows and Surface Temperatures – Detailed Calculations, (ISO 10211:2007)
- [3] Theodosiou, T. G., Papadopoulos, A. M., The Impact of Thermal Bridges on the Energy Demand of Buildings with Double Brick Wall Constructions, *Energy and Buildings*, 40 (2008), 11, pp. 2083-2089
- [4] Citterio, M., et al., Thermal Bridges in the EPBD Context: Overview on MS Approaches in Regulations, ASIEPI Information Paper, 2008, [www.buildup.eu/..P\\_148\\_EN\\_ASIEPI\\_WP4\\_IP2.pdf](http://www.buildup.eu/..P_148_EN_ASIEPI_WP4_IP2.pdf)
- [5] Evola, G., et al., Energy and Cost Evaluation of Thermal Bridge Correction in Mediterranean Climate, *Energy and Buildings*, 43 (2011), 9, pp. 2385-2393
- [6] Ge, H., Baba, F., Effect of Dynamic Modeling of Thermal Bridges on the Energy Performance of Residential Buildings with High Thermal Mass for Cold Climates, *Sustainable Cities and Society*, 34 (2017), Oct., pp. 250-263
- [7] Martin, K., et al., Problems in the Calculation of Thermal Bridges in Dynamic Conditions, *Energy and Buildings*, 43 (2011), 2-3, pp. 529-535
- [8] Ascione, F., et al., Experimental Validation of a Numerical Code by Thin Film Heat Flux Sensors for the Resolution of Thermal Bridges in Dynamic Conditions, *Applied Energy*, 124 (2014), July, pp. 213-222
- [9] Ge, H., et al., Impact of Balcony Thermal Bridges on the Overall Thermal Performance of Multi-Unit Residential Buildings: A Case Study, *Energy and Buildings*, 60 (2013), May, pp. 163-173
- [10] Cappelletti, F., et al., Analysis of the Influence of Installation Thermal Bridges on Windows Performance: The Case of Clay Block Walls, *Energy and Buildings*, 43 (2011), 6, pp. 1435-1442
- [11] Theodosiou, T., et al., Assessing the Use of Simplified and Analytical Methods for Approaching Thermal Bridges with Regard to Their Impact on the Thermal Performance of the Building Envelope, *Proceedings, World SB 14 Conference on the Sustainable Building*, Barcelona, Spain, 2014
- [12] O'Gradya, M., et al., Quantification of Heat Losses Through Building Envelope Thermal Bridges Influenced by Wind Velocity Using the Outdoor Infrared Thermography Technique, *Applied Energy*, 208 (2017), Dec., pp. 1038-1052
- [13] Gao, Y., et al., Dinamical Building Simulation: A Low Order Model for Thermal Bridges Losses, *Energy and Buildings*, 40 (2008), 12, pp. 2236-2243
- [14] Jimenez, N. A., Moreno, A. B., Experimental Assessment of Improvements in Thermal Performance from Insulating the Thermal Bridge at the Edge of a Floor Slab, *Informes De La Construcción*, 69 (2017), 546
- [15] Ilomets, S., et al., Impact of Linear Thermal Bridges on Thermal Transmittance of Renovated Apartment Buildings, *Journal of Civil Engineering and Management*, 23 (2016), 1, pp. 96-104
- [16] Quinten, J., Feldheim, V., Dynamic Modelling of Multidimensional Thermal Bridges in Building Envelopes: Review of Existing Methods, Application and New Mixed Method, *Energy and Buildings*, 110 (2016), Jan., pp. 284-293
- [17] Dumitrescu, L., et al., The Influence of Thermal Bridges in the Process of Buildings Thermal Rehabilitation, *Procedia Engineering*, 181 (2017), Dec., pp. 682-689
- [18] Martin, K., et al., Equivalent Wall Method for Dynamic Characterization of Thermal Bridges, *Energy and Building*, 55 (2012), Dec., pp. 704-714

- [19] Tadeu, A., *et al.*, Simulation of Dynamic Liner Thermal Bridges Using a Boundary Element Method Model in the Frequency Domain, *Energy and Building*, 43 (2011), 12, pp. 3685-3695
- [20] Berggren, B., Wall, M., Calculation of Thermal Bridges in (Nordic) Building Envelopes – Risk of Performance Failure Due to Inconsistent Use of Methodology, *Energy and Building*, 65 (2013), Oct., pp. 331-339
- [21] Ascione, F., *et al.*, Simplified State Space Representation for Evaluating Thermal Bridges in Building: Modelling, Application and Validation of a Methodology, *Applied Thermal Engineering*, 61 (2013), 2, pp. 344-354
- [22] Ascione, F., *et al.*, Different Methods for the Modelling of Thermal Bridges into Energy Simulation Programs: Comparisons of Accuracy for Flat Heterogeneous Roofs in Italian Climates, *Applied Energy*, 97 (2012), Sept., pp. 405-418
- [23] Gomes, A. P., *et al.*, Impact of Thermal Bridging on the Performance of Building Using Light Steel Framing in Brazil, *Applied Thermal Engineering*, 52 (2013), 1, pp. 84-89
- [24] Qasass, R., *et al.*, Timber Framing Factor in Toronto Residential House Construction, *Architectural Science Review*, 57 (2014), 3, pp. 159-168
- [25] Theodosioua, T., *et al.*, Analysis of the Thermal Bridging Effect on Ventilated Facades, *Procedia Environmental Sciences*, 38 (2017), Dec., pp. 397-404
- [26] Song, J. H., *et al.*, Evaluation of Alternatives for Reducing Thermal Bridges in Metal Panel Curtain Wall Systems, *Energy and Buildings*, 127 (2016), Sept., pp. 138-158
- [27] Oh, J. M., *et al.*, Analysis of Building Energy Savings Potential for Metal Panel Curtain Wall Building by Reducing Thermal Bridges at Joints Between Panels, *Energy Procedia*, 96 (2016), Sept., pp. 696-709
- [28] \*\*\*. EN ISO 6946:2007 Building Components and Building Elements – Thermal Resistance and Thermal Transmittance – Calculation Method
- [29] \*\*\*. STR 2.05.01:2013, Energy Performance of Buildings Design. Vilnius, Ministry of Environment of Republic of Lithuania (in Lithuanian).