

MICROPOLAR MIXED CONVECTIVE FLOW WITH CATTANEO-CHRISTOV HEAT FLUX Non-Fourier Heat Conduction Analysis

by

Abid HUSSANAN^{a,b}, Ilyas KHAN^c, Waqar A. KHAN^d, and Zhi-Min CHEN^{a*}

^a College of Mathematics and Statistics, Shenzhen University, Shenzhen, China

^b Key Laboratory of Optoelectronic Devices and Systems of Ministry of Education and Guangdong Province, College of Optoelectronic Engineering, Shenzhen University, Shenzhen, China

^c Department of Mathematics, College of Science Al-Zulfi, Majmaah University, Al-Majmaah, Saudi Arabia

^d Department of Mechanical Engineering, College of Engineering, Prince Mohammad Bin Fahd University, Al Khober, Saudi Arabia

Original scientific paper

<https://doi.org/10.2298/TSCI181220167H>

The purpose of this study is to investigate the impact of thermal relaxation time on the mixed convection flow of non-Newtonian micropolar fluid over a continuously stretching sheet of variable thickness in the presence of transverse magnetic field. An innovative and modified form of Fourier's law, namely, Cattaneo-Christov heat flux is employed in the energy equation to study the characteristics of thermal relaxation time. The governing equations are transformed into ODE, using similarity transformations. Fourth order Runge-Kutta numerical method is used to solve these equations. The effects of relevant parameters such as a micro-rotation parameter, magnetic parameter, thermal relaxation parameter, Prandtl number, surface thickness parameter, and mixed convection parameter, on the physical quantities are graphically presented. Results illustrate that fluid temperature enhances with the rise of thermal relaxation parameter, but it reduces with an increase in micro-rotation parameter. The skin friction decreases with a rise in micro-rotation and micro-element parameters. However, variation in the rate of heat transfer is quite significant for small values of thermal relaxation parameter.

Key words: micropolar fluid, Cattaneo-Christov heat flux, slendering sheet, thermal relaxation time

Introduction

The concept of micropolar theory in fluid mechanics was first introduced by Eringen [1]. This theory belongs to a class of fluids whose particles can rotate around the center of the volume element. The flow motion of these fluids requires a spin vector and micro-inertia tensor in addition the velocity vector. Hassanien and Gorla [2] studied micropolar fluid heat transfer over a stretching sheet. The effect of thermal radiation on micropolar fluids is considered by Ishak [3]. The effect of Newtonian heating on micropolar fluid with and without thermal radiation is studied by Hussanan *et al.* [4, 5]. Khan and Rashad [6] examined the chemical reaction effect on the micropolar fluid with heat and mass transfer stagnation-point flow over a stretching surface. Free convection effects in micropolar fluid-flow in the presence of heat source examined by Mishra *et al.* [7]. On the other hand, convection flow problems of

* Corresponding author, e-mail: zmchen@szu.edu.cn

non-Newtonian fluid under magnetic field have got much attention because of its wide applications in petro-chemical industry, MHD generators, blood flow measurements and geophysics as well as power generation system. Ashraf and Batool [8] investigated micropolar fluid-flow and heat transfer over a stretchable disk under magnetic field. The influence of magnetic field on micropolar ferrofluid-flow caused by stretching sheet is provided by Khan *et al.* [9]. Exact solutions of MHD micropolar fluid with heat transfer for both stretching and shrinking sheet cases was obtained by Khan *et al.* [10]. Hashemi *et al.* [11] computed the numerical solutions of micropolar nanofluid-flow inside a radiative porous medium buoyancy and magnetic field effects. Several researchers including [12-16] have investigated micropolar fluid-flow over a stretching/shrinking sheet with or without magnetic field.

All these studies are limited to the flow over stretching sheet or surface with the constant thickness [17-20]. However, in many manufacturing processes, the thickness of surface may or may not be constant. Historically, this idea was first presented by Lee [21]. Wang [22] investigated mixed convection over a heated tip vertical needle for both aiding and opposing flows situation. Ahmad *et al.* [23] also studied the same problem along thin vertical needles with variable heat flux. Fang *et al.* [24] discussed viscous flow over a stretching sheet with variable thickness. Subhashini *et al.* [25] extended the problem of Fang *et al.* [24] by adding thermal diffusive effect. Abdel-Wahed *et al.* [26] investigated the impact of hydromagnetic-flow and heat transfer characteristic over variable thickness surface using nanofluid. Acharya *et al.* [27] examined the flow of water-based nanofluid over a thin stretching sheet, and Kumar *et al.* [28] analysed radiative heat transfer Williamson nanofluid-flow over a Riga plate with variable thickness. Prasad *et al.* [29] considered the magnetic field effects on nanofluid over a thin elastic sheet with variable thickness. Very recently, Liu and Liu [30] investigated the 2-D laminar flow of fractional Maxwell fluid over variable thickness stretching sheet.

Classical Fourier's model for thermal conduction heat transfer is being well known for researchers and has been used for a long time, as cited previously. The equation stated for the heat conduction describes a parabolic equation. However, one of the most significant drawbacks for parabolic energy equation is that it may not be accurate for specific situations and hence it contradicts with the principle of causality. Maxwell was the first who provided the alteration of the Fourier's model by considering thermal relaxation time between temperature gradient and heat flux. Cattaneo [31] modified Fourier's model by adding a thermal relaxation fixed time term to represent the thermal inertia. This model is recognized Maxwell-Cattaneo's model in the published data. Christov [32] modified the Maxwell-Cattaneo's model to preserve the material invariant formulation. He replaced the ordinary derivative with the Oldroyd upper-convected derivative in Maxwell-Cattaneo's model. The addition of thermal relaxation time causes heat transportation via propagation of thermal waves with finite speed. After the development of this new model, which is known Cattaneo-Christov heat flux model, several attempts have been made in this direction. Tibullo and Zampoli [33] proved the uniqueness of the solution for an incompressible fluid by using Cattaneo-Christov heat flux model. Mustafa [34] discussed the rotating flow of Cattaneo-Christov heat flux model for viscoelastic fluid bounded by a stretching surface. Rubab and Mustafa [35] proposed Maxwell fluid model based on this heat flux and studied MHD flow over a stretching surface. Cattaneo-Christov heat flux considered by Reddy [36] for micropolar fluid-flow over a non-linear convective stretching surface with viscous dissipation. Khan *et al.* [37] gave generalized results for Maxwell fluid-flow caused by oscillatory surface along using Cattaneo-Christov theory of heat diffusion. Recently, recognizing the interface effect between carbon nanotubes and engine oil, Kundu *et al.* [38] developed a theoretical model for Maxwell nanofluid along stretching sheet based on Cattaneo-Christov heat flux.

Inspired by aforementioned survey, the aim of this study is to investigate the impact of thermal relaxation time on the mixed convection flow of non-Newtonian micropolar fluid over a continuously stretching sheet with variable thickness using Cattaneo-Christov heat flux model. Solutions of the formulated governing equations are obtained numerically by using fourth order Runge-Kutta method, which has been used in solving of many non-linear transport problems of the fluid dynamics.

Mathematical model

Consider 2-D flow of an incompressible micropolar fluid over an impermeable variable thickness stretching sheet. The x -axis is aligned with the stretching sheet and the y -axis is normal to the sheet. The sheet is stretched with $U_w(x) = U_0(x + b)^m$ along x -axis and its thickness varies as $y = A(x + b)^{(1-m)/2}$, where b is a parameter related to a sheet, U_0 is the reference velocity, constant A being small so that the sheet is sufficiently thin, and m is the velocity power index. Thickness of the sheet depends on m due to the acceleration or deceleration of the sheet. The fluid is electrically conducted and the magnetic field is applied perpendicular to the sheet. Figure 1 shows a sketch of momentum and temperature boundary-layers in co-ordinate system. The oriented anticlockwise rotation of particles is driven by a large velocity gradient within the boundary-layer and away from the boundary-layer are considered at rest. To explore the heat transfer analysis, Cattaneo-Christov heat flux model is found instead of Fourier's law. Under previous assumptions, the governing equations of the problem are given:

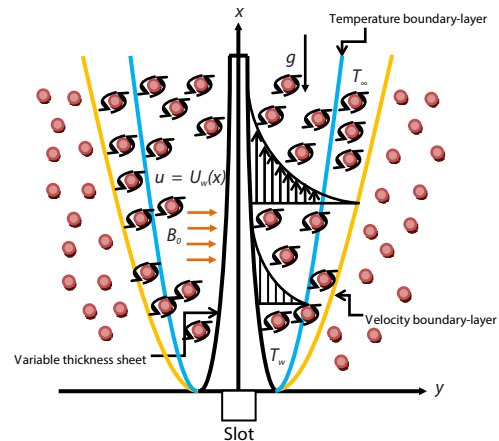


Figure 1. Flow configuration within 2-D co-ordinate system

$$\frac{d\rho}{dt} = \nabla(\rho\mathbf{V}) \quad (1)$$

$$\rho \left(\frac{d\mathbf{V}}{dt} \right) = -\nabla p + (2\mu + \kappa)\nabla(\nabla\mathbf{V}) - (\mu + \kappa)\nabla(\nabla \times \mathbf{V}) + \kappa(\nabla \times \mathbf{N}) + \mathbf{J} \times \mathbf{B} + \rho\mathbf{g} \quad (2)$$

$$\rho j \left(\frac{d\mathbf{N}}{dt} \right) = (\varepsilon + \varphi + \gamma_0)\nabla(\nabla\mathbf{N}) - \gamma_0\nabla \times (\nabla \times \mathbf{N}) + \kappa(\nabla\mathbf{V}) - 2\kappa\mathbf{N} \quad (3)$$

An incompressible flow is considered in present problem, eq. (1) becomes:

$$\nabla\mathbf{V} = 0 \quad (4)$$

Using the vector identity and mass conservation, eqs. (2) and (3) are simplified:

$$\rho \left[\frac{\partial\mathbf{V}}{\partial t} + (\mathbf{V}\nabla)\mathbf{V} \right] = -\nabla p + (\mu + \kappa)\nabla^2\mathbf{V} + \kappa(\nabla \times \mathbf{N}) + \mathbf{J} \times \mathbf{B} + \rho\mathbf{g} \quad (5)$$

$$\rho \left[\frac{\partial}{\partial t} + (\mathbf{V}\nabla)\mathbf{N} \right] = \gamma \nabla \mathbf{N} + \kappa(\nabla \times \mathbf{V}) - \kappa\mathbf{N} \quad (6)$$

One of the body force term corresponding to MHD flow, which is defined by Sharma *et al.* [39]:

$$\mathbf{J} \times \mathbf{B} = -\sigma B_0^2 \mathbf{V} \quad (7)$$

The velocity, micro-rotation and gravitational fields are defined in present problem:

$$\mathbf{V} = (u, v, 0), \quad \mathbf{N} = (0, 0, N), \quad \text{and} \quad \mathbf{g} = (g, 0, 0) \quad (8)$$

In view of aforementioned eqs. (7) and (8), eqs. (5) and (6) in case of steady flow:

$$\rho \left(u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = -\frac{\partial p}{\partial x} + \kappa \frac{\partial N}{\partial y} - \sigma B_0^2 u + (\mu + \kappa) \frac{\partial^2 u}{\partial y^2} + \rho g \quad (9)$$

$$\rho j \left(u \frac{\partial N}{\partial x} + v \frac{\partial N}{\partial y} \right) = \gamma_0 \frac{\partial^2 N}{\partial y^2} - \kappa \left(2N + \frac{\partial u}{\partial y} \right) \quad (10)$$

According to Ahmed and Dutta [40] and under Boussinesq approximation, the aforementioned equations take the form:

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \frac{\kappa}{\rho} \frac{\partial N}{\partial y} - \frac{\sigma B_0^2}{\rho} u + \left(\nu + \frac{\kappa}{\rho} \right) \frac{\partial^2 u}{\partial y^2} + g \beta_T (T - T_\infty) \quad (11)$$

$$u \frac{\partial N}{\partial x} + v \frac{\partial N}{\partial y} = \frac{\gamma_0}{\rho j} \frac{\partial^2 N}{\partial y^2} - \kappa \left(2N + \frac{\partial u}{\partial y} \right) \quad (12)$$

Following [32, 41], the energy equation corresponding to Cattaneo-Christov heat flux model:

$$\begin{aligned} & u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} + \lambda_0 \left(u^2 \frac{\partial^2 T}{\partial x^2} + v^2 \frac{\partial^2 T}{\partial y^2} + 2uv \frac{\partial^2 T}{\partial x \partial y} \right) + \\ & + \lambda_0 \left(u \frac{\partial u}{\partial x} \frac{\partial T}{\partial x} + v \frac{\partial v}{\partial y} \frac{\partial T}{\partial y} + u \frac{\partial v}{\partial x} \frac{\partial T}{\partial y} + v \frac{\partial u}{\partial y} \frac{\partial T}{\partial x} \right) = \frac{k}{\rho C_p} \frac{\partial^2 T}{\partial y^2} \end{aligned} \quad (13)$$

The boundary conditions:

$$u = U_0 (x+b)^m, \quad v = 0, \quad N = -\delta \frac{\partial N}{\partial y}, \quad T = T_w \quad \text{at} \quad y = A(x+b)^{\frac{1-m}{2}} \quad (14)$$

$$u \rightarrow 0, \quad N \rightarrow 0, \quad T \rightarrow T_\infty \quad \text{as} \quad y \rightarrow \infty \quad (15)$$

In order to simplify the aforementioned equation, we introduce the following similarity variables [24, 36]:

$$\begin{aligned} \eta &= y \sqrt{\frac{(m+1)U_0(x+b)^{m-1}}{2\nu}}, \quad \psi = \sqrt{\frac{2\nu U_0(x+b)^{m+1}}{m+1}} f(\eta), \quad u = U_0(x+b)^m f'(\eta) \\ v &= -\sqrt{\frac{(m+1)\nu U_0(x+b)^{m-1}}{2}} \left[f(\eta) + \left(\frac{m-1}{m+1} \right) \eta f'(\eta) \right] \\ N &= U_0(x+b)^m \sqrt{\frac{(m+1)U_0(x+b)^{m-1}}{2\nu}} h(\eta), \quad \phi(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \end{aligned} \quad (16)$$

Moreover, in order to compute the similar solutions, we made the following:

- The applied magnetic field is of the form $B(x) = B_0(x + b)^{(m-1)/2}$, where B_0 is the strength of the magnetic field [42].
- The stretching sheet temperature is $T_w(x) = T_\infty + T_0(x + b)^{(1-n)/2}$, where T_∞ and T_0 represent ambient and reference temperature, respectively, with $n = 3 - 4m$ in order to facilitate the similarity transformation.

Using eq. (16), eqs. (11)-(13) can be written:

$$(1+K)f'''(\eta) + f(\eta)f''(\eta) - \left(\frac{2m}{m+1}\right)f'^2(\eta) + Kh'(\eta) - \left(\frac{2}{m+1}\right)[M^2f'(\eta) - \lambda\theta(\eta)] = 0 \quad (17)$$

$$\left(1 + \frac{K}{2}\right)h''(\eta) + f(\eta)h'(\eta) - \left(\frac{3m-1}{m+1}\right)f'(\eta)h(\eta) - K\left(\frac{2}{m+1}\right)[2h(\eta) + f''(\eta)] = 0 \quad (18)$$

$$\phi''(\eta) + \text{Pr}f(\eta)\phi'(\eta) + \text{Pr}\gamma\left[\left(\frac{m-3}{2}\right)f(\eta)f'(\eta)\phi'(\eta) - \left(\frac{m+1}{2}\right)f^2(\eta)\phi''(\eta)\right] = 0 \quad (19)$$

The transformed boundary conditions in eqs. (14) and (15):

$$f(\alpha) = \alpha\left(\frac{1-m}{m+1}\right), \quad f'(\alpha) = 1, \quad h(\alpha) = -\delta f''(\alpha), \quad \phi(\alpha) = 1 \quad (20)$$

$$f'(\infty) \rightarrow 0, \quad h(\infty) \rightarrow 0, \quad \phi(\infty) \rightarrow 0 \quad (21)$$

To facilitate the numerical computations, we define $f(\eta) = F(\eta - \alpha) = F(\zeta)$, $h(\eta) = H(\eta - \alpha) = H(\zeta)$, and $\phi(\eta) = \theta(\eta - \alpha) = \theta(\zeta)$ so that the aforementioned eqs. (17)-(29) become:

$$(1+K)F'''(\zeta) + F(\zeta)F''(\zeta) - \left(\frac{2m}{m+1}\right)F'^2(\zeta) + KH'(\zeta) - \left(\frac{2}{m+1}\right)[M^2F'(\zeta) - \lambda\theta(\zeta)] = 0 \quad (22)$$

$$\left(1 + \frac{K}{2}\right)H''(\zeta) + F(\zeta)H'(\zeta) - \left(\frac{3m-1}{m+1}\right)F'(\zeta)H(\zeta) - K\left(\frac{2}{m+1}\right)[2H(\zeta) + F''(\zeta)] = 0 \quad (23)$$

$$\theta''(\zeta) + \text{Pr}F(\zeta)\theta'(\zeta) + \text{Pr}\gamma\left[\left(\frac{m-3}{2}\right)F(\zeta)F'(\zeta)\theta'(\zeta) - \left(\frac{m+1}{2}\right)F^2(\zeta)\theta''(\zeta)\right] = 0 \quad (24)$$

where

$$K = \frac{\kappa}{\nu}, \quad M^2 = \frac{\sigma B_0^2}{U_0 \rho (x+b)^{m-1}}, \quad \gamma = \lambda_0 U_0 (x+b)^{m-1}, \quad \text{Pr} = \frac{\mu C_p}{k}$$

$$\alpha = A\sqrt{\frac{U_0(m+1)}{2\nu}}, \quad \lambda = \frac{\text{Gr}_x}{\text{Re}_x^2}, \quad \text{Gr}_x = \frac{\text{g}\beta_T(T_w - T_\infty)(x+b)^3}{\nu^2}$$

where K is the micro-rotation parameter, M – the magnetic parameter, γ – the thermal relaxation parameter, Pr – the Prandtl number, α – the surface thickness parameter, λ – the mixed convection parameter, and Gr_x – the Grashof number. The corresponding boundary conditions are presented:

$$F(0) = \alpha \left(\frac{1-m}{m+1} \right), \quad F'(0) = 1, \quad H(0) = -\delta F''(\eta), \quad \theta(0) = 1 \quad (25)$$

$$F'(\infty) \rightarrow 0, \quad H(\infty) \rightarrow 0, \quad \theta(\infty) \rightarrow 0 \quad (26)$$

Further, the outer shape of the sheet depends on shape parameter m . The case $m < 1$ represents the surface with increasing thickness. The case $m > 1$ represents a decrease in the surface thickness and $m = 1$ is used for the flat surface problem. Also, this parameter controls the motion such as $m < 1$ describes deceleration motion, $m > 1$ for acceleration motion and $m = 0$ for linear with constant velocity. Skin friction coefficients and local Nusselt number:

$$C_{fx} = \frac{1}{\rho u_w^2} \left[(\mu + \kappa) \frac{\partial u}{\partial y} + \kappa N \right]_{y=A(x+b)^{\frac{1-m}{2}}} \quad (27)$$

$$Nu_x = \frac{-(x+b) \frac{\partial T}{\partial y}}{(T_w - T_\infty)} \Big|_{y=A(x+b)^{\frac{1-m}{2}}} \quad (28)$$

and using similarity variables (16) takes:

$$Re_x^{1/2} C_{fx} = \sqrt{\frac{m+1}{2}} [1 + (1-\delta)K] F''(0) \quad (29)$$

$$Re_x^{-1/2} Nu_x = -\sqrt{\frac{m+1}{2}} \theta'(0) \quad (30)$$

where

$$Re_x = \frac{U_0}{\nu} (x+b)^{m+1}$$

is the local Reynolds number.

Runge-Kutta-Fehlberg method

Equations (22)-(24) with boundary conditions (25) and (26) are solved numerically using fourth-fifth order Runge-Kutta-Fehlberg method. This method is more accurate and robust and has been used in several published papers. The MAPLE 18 has been used in this study. To enable convergence for all values of governing parameters, the coefficients of the term F'' , H'' , θ'' are replaced with $(101 - 100\lambda_1)$ and continuation $= \lambda_1$ is used in the solve command. Using this modification, MAPLE gives the correct asymptotic values, and the solution converges quickly. The asymptotic boundary conditions given by eq. (26) were replaced by using a value of 8 for the similarity variable ζ_{\max} :

$$\zeta_{\max} = 8, \quad F'(8) \rightarrow 0, \quad H(8) \rightarrow 0, \quad \theta(8) \rightarrow 0 \quad (31)$$

The optimal value of $\zeta_{\max} = 8$ ensures that numerical solutions approach the asymptotic values correctly. This is a crucial point that is previous ignored in most of papers.

Results and discussion

The effects of governing parameters such as the micro-rotation parameter, magnetic parameter, thermal relaxation parameter, Prandtl number, surface thickness parameter, mixed convection parameter, micro-element parameter, and shape parameter or motion parameter on velocity, micro-rotation, temperature fields, skin friction and Nusselt number are plotted. Figures 2(a) and 2(b) describe the effects of micro-rotation parameter and mixed convection parameter together with variation in shape parameter and surface thickness parameter on velocity field in the presence of magnetic field $M \neq 0$. The application of transverse magnetic field always results in a resistive type force also called Lorentz force. This type of resistive force tends to resist the fluid-flow and thus reducing the fluid motion. However, it is found that with increasing values of micro-rotation parameter and shape parameter, velocity increases as shown in fig. 2(a). It means that micro-rotation parameter has much influence on the fluid velocity for the case of weak concentration $\delta = 0$. It is also seen that results are similar in both flat surface ($m = 1$) as well a decrease in the surface thickness ($m > 1$) cases but change in flat surface problem is slightly smaller when compared with decreasing surface thickness.

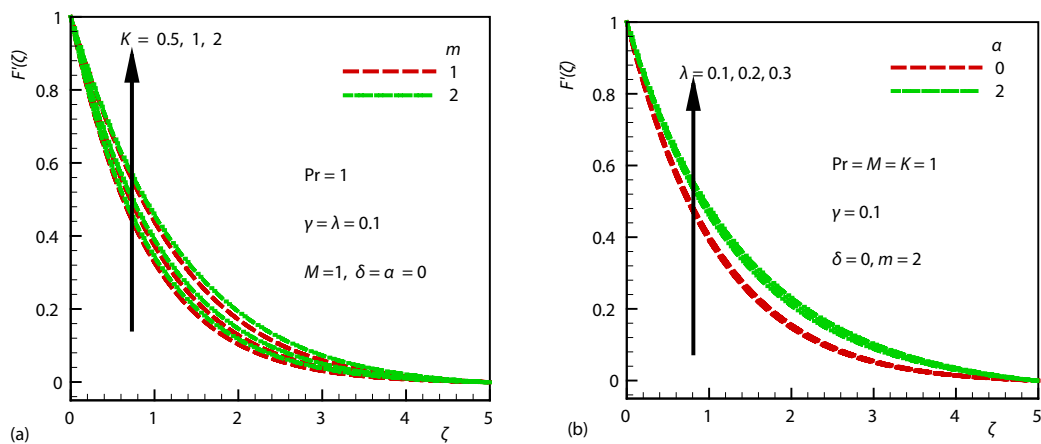


Figure 2. Variation of dimensionless velocity with several governing parameters

The velocity behavior remains the same in fig. 2(b), *i. e.* with increasing mixed convection parameter for different values of surface thickness parameter, velocity increases. An increase in mixed convection parameter means a decrease in local Reynolds number and increases the Grashof number. Physically, it is true because the role of Grashof number in heat transfer flow is to increase the strength of the flow. Here $Gr > 0$ represents to the cooling problem. Further, cooling problem is of great importance and encountered in engineering applications, such as in the cooling of electronic components and nuclear reactors. The effects of the same parameters on temperature as in fig. 2 are investigated in figs. 3(a) and 3(b). However, in both of these figures, the temperature has an opposite behavior. More exactly, with increasing values of micro-rotation parameter and shape parameter, temperature decreases as shown in fig. 3(a). The variation in temperature as shown in fig. 3(b) is identical with that of velocity as shown in fig. 2(a), *i. e.* increases temperature for large values of mixed convection parameter and surface thickness parameter. Increasing the mixed convection parameter means flow is dominated by free convection and more heat transfer are carried out of the surface, thus decreasing the thick-

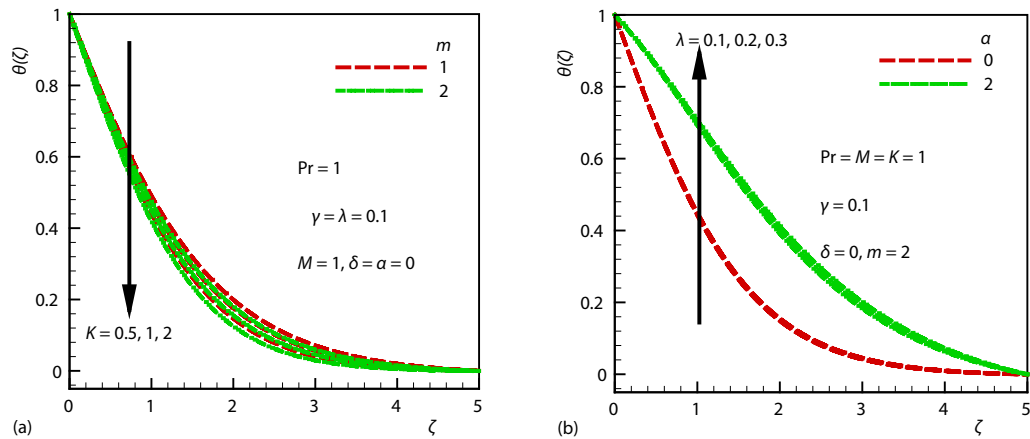


Figure 3. Variation of dimensionless temperature with several governing parameters

ness of the thermal boundary-layers. The results for micro-rotation velocity are plotted in fig. 4(a) and 4(b) for different values of micro-rotation parameter and mixed convection parameter. From fig. 4(a), it is found that micro-rotation velocity shows an oscillatory behavior, *i. e.* initially increases with increasing of micro-rotation parameter and shape parameter until $\zeta \approx 9$, and after that the behavior of micro-rotation velocity is reversed, for increasing micro-rotation parameter and shape parameter, micro-rotation velocity decreases. Finally, for large ζ , velocity decays to zero. Figure 4(b) indicates that variation in micro-rotation velocity is negligible for different values of mixed convection parameter. It is also noticed that sufficient increase is observed in micro-rotation velocity for increasing micro-element parameter, which relates to the micro-rotation vector and shear stress. Here $\delta = 0$ considers the situation when micro-elements at the surface are unable to rotate and show weak concentrations, and $\delta = 0.5$ corresponds to the vanishing of antisymmetric part of the stress tensor.

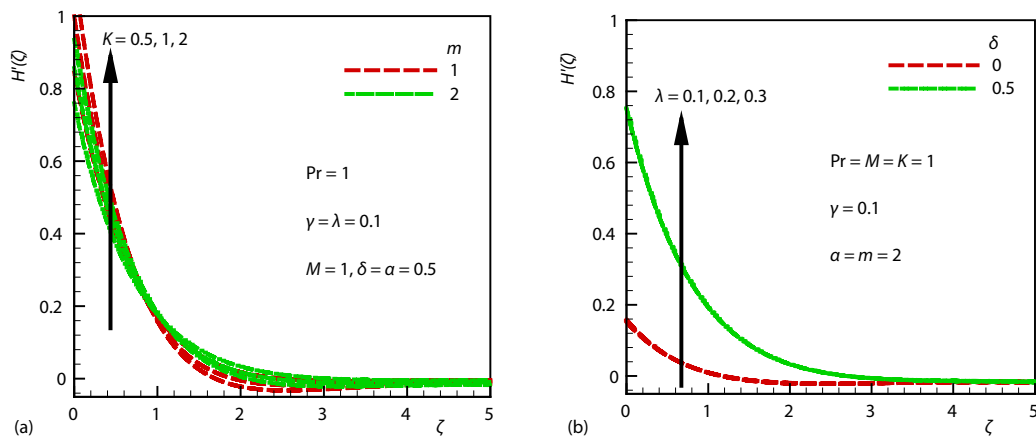


Figure 4. Variation of dimensionless rotational velocity with several governing parameters

The physical quantities of our interest in this problem are skin friction and heat transfer rate also called Nusselt number. The significances of several physical parameters on skin friction are highlighted in figs. 5(a) and 5(b). In fig. 5(a) skin friction is plotted against mag-

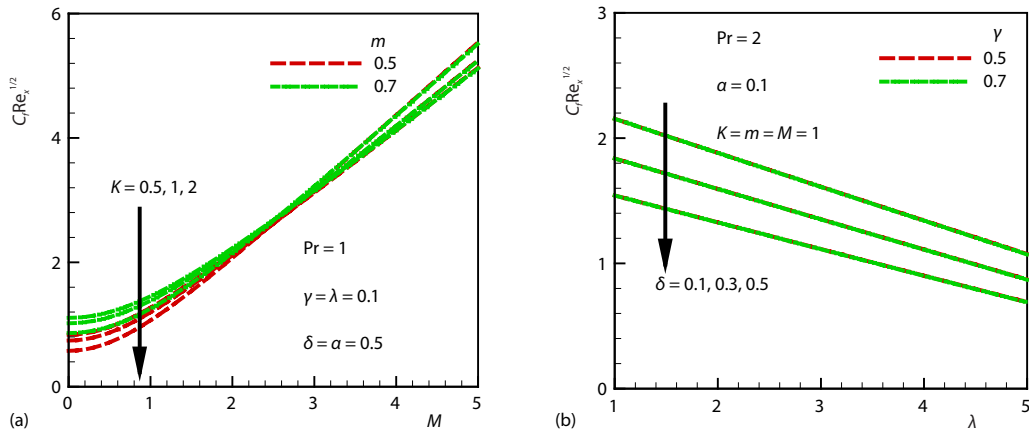


Figure 5. Variation of dimensionless skin friction with several governing parameters

netic parameter, for micro-rotation parameter and two different values of shape parameter. The skin friction shows an oscillatory behavior. More exactly, for larger values of micro-rotation parameter, skin friction decreases first and then increases. In fig. 5(b), it is shown that with increasing values of a micro-element parameter, skin friction decreases, however, the variation in skin friction is very minor for two different values of thermal relaxation parameter. Graphical results for Nusselt number are shown in figs. 6(a) and 6(b). In fig. 6(a), Nusselt number is plotted against magnetic parameter for micro-rotation parameter, and shape parameter. It is clear that rate of heat transfer increases with increasing values of micro-rotation parameter and shape parameter. An identical behavior is noted as in fig. 6(b), for increasing values of micro-element and thermal relaxation parameter. However, the variation in rate of heat transfer is quite large for thermal relaxation parameter.

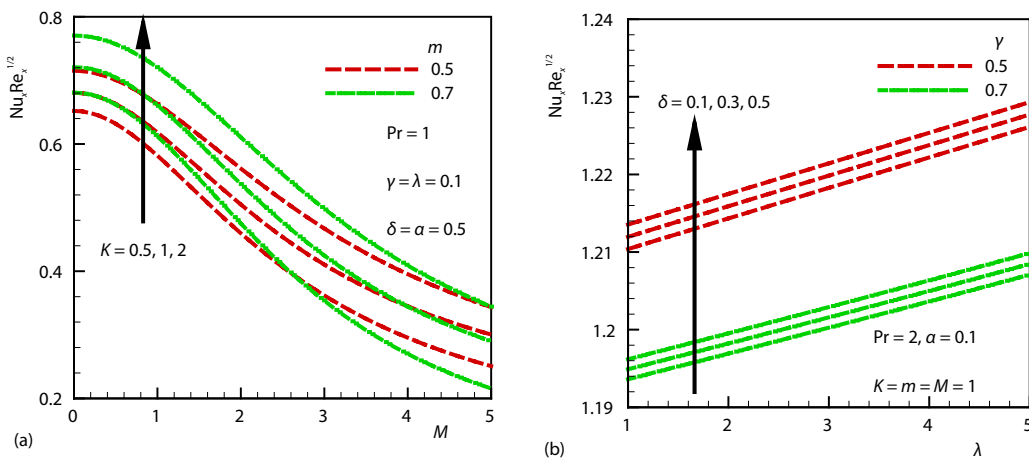


Figure 6. Variation of dimensionless Nusselt number with several governing parameters

Conclusion

Cattaneo-Christov heat flux is applied to investigate the characteristics of thermal relaxation time on the mixed convection flow of non-Newtonian micropolar fluid over a

continuously stretching sheet with variable thickness. The results are plotted for micro-rotation parameter, magnetic parameter, thermal relaxation parameter, Prandtl number, surface thickness parameter, mixed convection parameter, micro-element parameter and shape parameter. It is demonstrated that the dimensionless temperature of the fluid enhances with rising of thermal relaxation parameter but reduces with the rise of micro-rotation parameter. Variation in the rate of heat transfer is more effective for small values of thermal relaxation parameter. The results show that magnetic parameter can be controlled the direction and strength of flow. Hence, on the basis of present results it can be concluded that with increment and decrement of different parameters, the temperature for the Cattaneo-Christov heat flux can be improved.

Nomenclature

B_0 – magnetic field intensity
 C_p – heat capacity at constant
 F – dimensionless stream function
 g – acceleration due to gravity
 \mathbf{J} – current density
 j – micro-inertia density
 K – micro-rotation parameter
 k – thermal conductivity
 M – magnetic parameter
 m – shape parameter
 N – angular velocity
 Pr – Prandtl number
 T – temperature of the fluid
 T_w – wall temperature
 T_∞ – ambient temperature

Greek symbols

α – surface thickness parameter
 β_r – volumetric coefficient of thermal expansion
 γ – thermal relaxation parameter
 γ_0 – spin-gradient viscosity
 δ – micro-element parameter
 ε, φ – spin gradient viscosity coefficients
 θ – dimensionless temperature
 κ – vortex viscosity
 λ – mixed convection parameter
 λ_0 – thermal relaxation time
 ν – kinematic viscosity
 ρ – fluid density
 σ – electric conductivity

Acknowledgment

This research is supported by China Postdoctoral Science Foundation (2018M643156) and the National Natural Science Foundation (11571240).

References

- [1] Eringen, A. C., Theory of Micropolar Fluids, *Journal of Applied Mathematics and Mechanics*, 16 (1966), pp. 1-18
- [2] Hassanien, I. A., Gorla, R. S. R., Heat Transfer to a Micropolar Fluid from a Non-Isothermal Stretching Sheet with Suction and Blowing, *Acta Mechanica*, 84 (1990), Mar., pp. 191-199
- [3] Ishak, A., Thermal Boundary-Layer Flow over a Stretching Sheet in a Micropolar Fluid with Radiation effect, *Meccanica*, 45 (2010), Oct., pp. 367-373
- [4] Hussanan, A., *et al.*, Heat and Mass Transfer in a Micropolar Fluid with Newtonian Heating: An Exact Analysis, *Neural Computing and Applications*, 29 (2018), Aug., pp. 59-67
- [5] Hussanan, A., *et al.* Unsteady Free Convection Flow of a Micropolar Fluid with Newtonian Heating: Closed form solution, *Thermal Science*, 21 (2017), 6, pp. 2313-2326
- [6] Khan, W. A., Rashad, A. M., Combined Effects of Radiation and Chemical Reaction on Heat and Mass Transfer by MHD Stagnation-Point Flow of a Micropolar Fluid Towards a Stretching Surface, *Journal of the Nigerian Mathematical Society*, 36 (2017), 1, pp. 219-238
- [7] Mishra, S. R., *et al.*, Free Convective Micropolar Fluid-Flow and Heat Transfer over a Shrinking Sheet with Heat Source, *Case Studies in Thermal Engineering*, 11 (2018), Mar., pp. 113-119
- [8] Ashraf, M., Batool, K., The MHD Flow and Heat Transfer of a Micropolar Fluid over a Stretchable Disk, *Journal of Theoretical and Applied Mechanics*, 51 (2013), 1, pp. 25-38
- [9] Khan, W. A., *et al.*, The MHD Fluid-Flow and Heat Transfer of Micropolar Ferrofluids over a Stretching sheet, *Journal of Nanofluids*, 5 (2016), 4, pp. 567-573

- [10] Khan, Z. H., et al., Dual Solutions of MHD Boundary-Layer Flow of a Micropolar Fluid with Weak Concentration over a Stretching/Shrinking Sheet, *Communications in Theoretical Physics*, 67 (2017), 4, pp. 449
- [11] Hashemi, H., et al., The MHD Natural-Convection of a Micropolar Nanofluid-Flowing Inside a Radiative Porous Medium under LTNE Condition with an Elliptical Heat Source, *Journal of Molecular Liquids*, 271 (2018), Dec., pp. 914-925
- [12] Qasim, M., et al., Heat Transfer in a Micropolar Fluid over a Stretching Sheet with Newtonian Heating, *Plos One*, 8 (2013), 4, pp. e59393
- [13] Turkyilmazoglu, M., Flow of a Micropolar Fluid Due to a Porous Stretching Sheet and Heat Transfer, *International Journal of Non-Linear Mechanics*, 83 (2016), July, pp. 59-64
- [14] Kocić, M. M., et al., Heat Transfer in Micropolar Fluid-Flow under the Influence of Magnetic Field, *Thermal Science*, 20 (2016), Suppl. 5, pp. S1391-S1404
- [15] Waqas, H., et al., The MHD Forced Convective Flow of Micropolar Fluids Past a Moving Boundary Surface with Prescribed Heat Flux and Radiation, *British Journal of Mathematics and Computer Science*, 21 (2017), 1, pp. 1-14
- [16] Hussanan, A., et al., Microstructure and Inertial Characteristics of a Magnetite Ferrofluid over a Stretching/Shrinking Sheet Using Effective Thermal Conductivity Model, *Journal of Molecular Liquids*, 255 (2018), Apr., pp. 64-75
- [17] Khan S. U., et al., Soret and Dufour Effects on Hydromagnetic-Flow of Eyring-Powell Fluid over Oscillatory Stretching Surface with Heat Generation/Absorption and Chemical Reaction, *Thermal Science*, 22 (2018), 1B, pp. 533-543
- [18] Khan S. U., et al., Numerical Computations on Flow and Heat Transfer of Casson Fluid Due to Oscillatory Moving Surface, *Thermal Science*, 23 (2019), 6A, pp. 3365-3377
- [19] Qasim M., et al., Second Law Analysis of Unsteady MHD Viscous Flow over a Horizontal Stretching Sheet Heated Non-Uniformly in the Presence of Ohmic heating: Utilization of Gear-Generalized Differential Quadrature Method, *Entropy*, 21 (2019), 3, 240
- [20] Hussanan, A., et al., The MHD Flow and Heat Transfer in a Casson Fluid over a Non-Linearly Stretching Sheet with Newtonian Heating, *Heat Transfer Research*, 49 (2018), 12, pp. 1185-1198
- [21] Lee, L. L., Boundary-Tayer over a thin Needle, *Physics of Fluids*, 10 (1967), pp. 822-828
- [22] Wang, C. Y., Mixed Convection on a Vertical Needle with Heated tip, *Physics of Fluids*, 2 (1990), 4, pp. 622-625
- [23] Ahmad, S., et al., Mixed Convection Boundary-Layer Flow Along Vertical Moving Thin Needles with Variable Heat Flux, *Heat and Mass Transfer*, 44 (2008), 4, pp. 473-479
- [24] Fang, T., et al., Boundary-Layer Flow over a Stretching Sheet with Variable Thickness, *Applied Mathematics and Computation*, 218 (2012), 13, pp. 7241-7252
- [25] Subhashini, S. V., et al., Dual Solutions in a Thermal Diffusive Flow over a Stretching Sheet with Variable Thickness, *International Communications in Heat and Mass Transfer*, 48 (2013), Nov., pp. 61-66
- [26] Abdel-Wahed, M. S., et al., Flow and Heat Transfer over a Moving Surface with Non-Vinear Velocity and Variable Thickness in a Nanofluids in the Presence of Brownian Motion, *Applied Mathematics and Computation*, 254 (2015), Mar., pp. 49-62
- [27] Acharya, N., et al., Ramification of Variable Thickness on MHD TiO₂ and Ag Nanofluid-Flow over a Slendering Stretching Sheet Using NDM, *The European Physical Journal Plus*, 131 (2016), 303
- [28] Kumar, R., et al., Radiative Heat Transfer Study for Flow of Non-Newtonian Nanofluid Past a Riga Plate with Variable Thickness, *Journal of Molecular Liquids*, 248 (2017), Dec., pp. 143-152
- [29] Prasad, K. V., et al., The MHD Flow and Heat Transfer in a Nanofluid over a Slender Elastic Sheet with Variable Thickness, *Results in Physics*, 7 (2017), Apr., pp. 1462-1474
- [30] Liu, L., Liu, F., Boundary-Layer Flow of Fractional Maxwell Fluid over a Stretching Sheet with Variable Thickness, *Applied Mathematics Letters*, 79 (2018), May, pp. 92-99
- [31] Cattaneo, C., Sulla Conduzione del calore, *Atti Semin. Mat. Fis. Univ. (in Italiano)*, *Modena Reggio Emilia*, 3 (1948), pp. 83-101
- [32] Christov, C. I., On Frame Indifferent Formulation of the Maxwell-Cattaneo Model of Finite-Speed Heat Conduction, *Mechanics Research Communications*, 36 (2009), 4, pp. 481-486
- [33] Tibullo, V., Zampoli, V., A Uniqueness Result for the Cattaneo-Christov Heat Conduction Model Applied to Incompressible Fluids, *Mechanics Research Communications*, 38 (2011), 1, pp. 77-99
- [34] Mustafa, M., Cattaneo-Christov Heat Flux Model for Rotating Flow and Heat Transfer of Upper Convected Maxwell Fluid, *AIP Advances*, 5 (2015), 4, 047109

- [35] Rubab, K., Mustafa, M., Cattaneo-Christov Heat Flux Model for MHD Three-Dimensional Flow of Maxwell Fluid over a Stretching Sheet, *Plos One*, 11 (2016), Apr., p. e0153481
- [36] Reddy, M. G., Influence of Lorentz Force, Cattaneo-Christov Heat Flux and Viscous Dissipation on the Flow of Micropolar Fluid Past a Non-Linear Convective Stretching Vertical Surface, *Non-Linear Engineering*, 6 (2017), 4, pp. 317-326
- [37] Khan S. U., *et al.*, Some Generalized Results for Maxwell Fluid-Flow over Porous Oscillatory Surface with Modified Fourier and Fick's Theories, *Journal of the Brazilian Society of Mechanical Sciences and Engineering*, 40 (2018), 1-12, p. 474
- [38] Kundu, P. R., *et al.*, Framing the Cattaneo-Christov Heat Flux Phenomena on CNT-Based Maxwell Nanofluid Along Stretching Sheet with Multiple Slips, *Arabian Journal for Science and Engineering*, 43 (2018), Aug., pp. 1177-1188
- [39] Sharma, S., *et al.*, Magnetic Field Effect on Flow Parameters of Blood Along with Magnetic Particles in a Cylindrical Tube, *Journal of Magnetism and Magnetic Materials*, 377 (2015), Mar., pp. 395-401
- [40] Ahmed, N., Dutta, M., Transient Mass Transfer Flow Past an Impulsively Started Infinite Vertical Plate with Ramped Plate Velocity and Ramped Temperature, *International Journal of the Physical Sciences*, 8 (2013), 7, pp. 254-263
- [41] Atlas, M., *et al.*, Entropy Generation and Unsteady Casson Fluid Flow Squeezing between two Parallel Plates Subject to Cattaneo-Christov Heat Mass Flux, *The European Physical Journal Plus*, 134 (2019), Jan., pp. 1-17
- [42] Afridi, M., *et al.*, Entropy Generation Minimization in MHD Boundary Layer Flow over a Slendering Stretching Sheet in the Presence of Frictional and Joule heating, *Journal of the Korean Physical Society*, 73 (2018), Nov., pp. 1-7