

INVESTIGATION OF AIR CONDITIONING TEMPERATURE VARIATION BY MODIFYING THE STRUCTURE OF PASSENGER CAR USING COMPUTATIONAL FLUID DYNAMICS

by

**Haribabu KRISHNASWAMY^{a*}, Sivaprakash MUTHUKRISHNAN^b,
Sathish THANIKODI^c, Godwin Antony AROCKIARAJ^d,
and Vijayan VENKATRAMAN^d**

^a Department of Mechanical Engineering, SCAD College of Engineering and Technology,
Cheranmahadevi, Tirunelveli, Tamilnadu, India

^b Department of Mechanical Engineering, Stella Marys College of Engineering,
Aruthenganvilai, Kanyakumari, Tamilnadu, India

^c Department of Mechanical Engineering, Saveetha School of Engineering, SIMATS,
Chennai, Tamilnadu, India

^d Department of Mechanical Engineering, K. Ramakarishnan College of Technology,
Tamilnadu, India

Original scientific paper

<https://doi.org/10.2298/TSCI190409397K>

Air conditioning system is used for various application, in passenger car it gives comfort to the passenger. Now a days huge advancement have been included in the air conditioning system, especially automatic air conditioning system plays a vital role in passenger car. These air conditioning systems are performing well and have the capability of maintaining the temperature for long time with energy consumption. However, in some vehicle the performance of these air conditioning system is not achieved, while some vehicle achieved better performance. In later study it is found that, the structure of vehicle body also influence the performance of air conditioning system. In some structure the air conditioning air-flow a long distance in short time and have the capability to enhance the air conditioning performance. It is also found that the air conditioning performance can be improved by the structure of vehicle body. In this paper, we considered an Indian small budget car. The structure of the car is slightly modified and replaced the position of the air conditioning outlet. Then the residual temperature inside the car is analyzed with and without air conditioning. Here the CFD is used to analysis the temperature inside car at various position.

Key words: *air conditioning system, temperature analysis, CFD, passenger car air conditioning system*

Introduction

Air conditioning (AC) system can provide safety and comfort to passenger, hence it is an unavoidable feature in every passenger vehicle especially in cars. The AC system in passenger vehicle are automatic are manual [1]. In the automatic AC system, the system can automatically adjust the fan speed, air-flow, etc. [2]. But in case of manual system, the passenger has to set these setting manually. The automatic AC system is mostly connected with the

* Corresponding author, e-mail: akbabu2000@gmail.com

engine of the vehicle, so it perform as per the drive mode or performance [3, 4]. The manual AC system operates as an extra equipment with the supply form the vehicle. So, the manual AC system may affect the performance of the vehicle [5]. The performance of the automatic AC system also varying vehicle to vehicle [6]. That is the AC air is not completely circulating the cabin of the car. So the pillion seat passenger might not get enough air so their position is more hot compare to the near seat of them [7-9]. Hence, researchers tend into the research to find the reason for the performance variation of automatic AC system vehicle to vehicle. They finally found that the shape of the car body influence the performance of AC system [10]. In some research the author found that the car body material also influences the performance of the AC system [11].

The passenger vehicle enables few air vents to spread air in full cabin of the car. In case of budget car the manufacturer enable only one air vents, or place only at the dash board of the vehicle. In order to manufacture the car under the budget price they cut short the features [12]. But these feature reduction leads grief to the passenger in the pillion seat. Thus research is under gone to design an effective air distribution system for the budget car, to facilitate more comfort to the passengers [13]. The temperature distribution and air-flow from an AC system vary based on the load occupied by the human in the vehicle. Due to the space limitation of the vehicle the air-flow is directed to small section inside the vehicle. Usually the air out form the AC is high velocity, and it may restricted by the seats of the vehicle, so there is a chance of circulating the air inside the vehicle. The circulation of air may cause a problem that, the air from AC might not cover all the space of the vehicle [14]. Hence researcher tend in to the research to develop a better shape of car cabin to achieve better AC performance. In this sense the proposed study is concentrated to analysis the variation of AC performance by varying the vehicle body structure.

Table 1. Dimensions of small budget car

Parameter	Range [m]
Length	3.1
Width	1.5
Hight	1.6

Modelling of car body for the AC performance improvement

The proposed system provided the CFD modelling of various structure for the Indian budget car. Then the temperature at the various position inside the car is analyzed. The dimension of actual body of small budget is given in tab. 1 and the actual 3-D model of

the existing and proposed structure is shown in figs. 1 and 2, respectively. The mesh analysis of the model is given in fig. 3.

Performance analysis

The performance of the actual and proposed model of car body is analyzed using ANSYS CFD. The temperature analysis of car body by existing and proposed is given in figs. 4 and 5, respectively.

From figs. 4 and 5, it clearly shows the temperature variation at various location of car cabin in proposed and existing model. In the exiting model the pillion seat is hot compare to the front seat, due to the circulation of air the overall temperature at this model is high. But the proposed model effectively distribute the air and it circulate well and maintain the low temperature in the cabin.

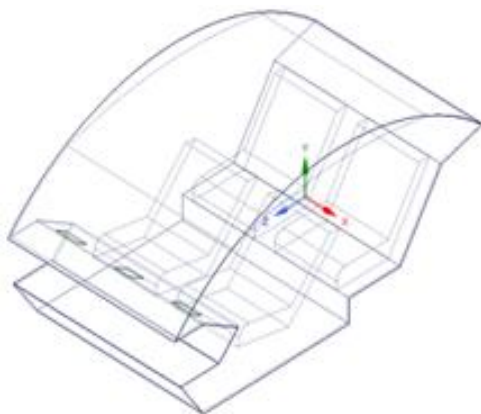


Figure 1. The 3-D view of existing body of small budget car

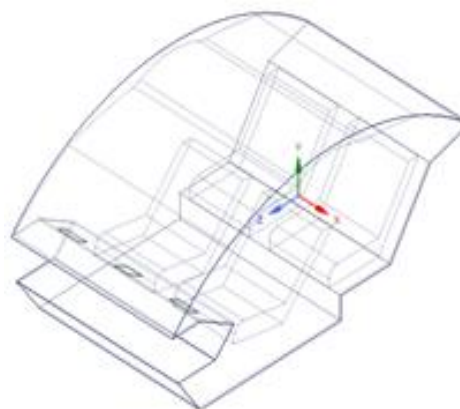


Figure 2. The 3-D view of proposed body of small budget car

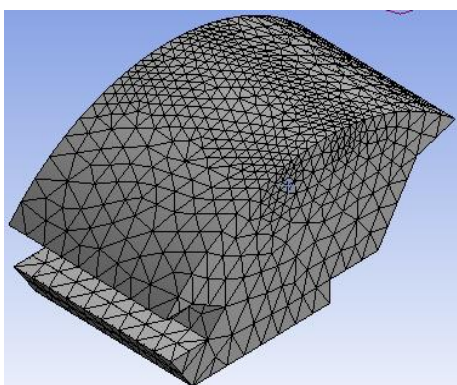


Figure 3. Meshing of car body

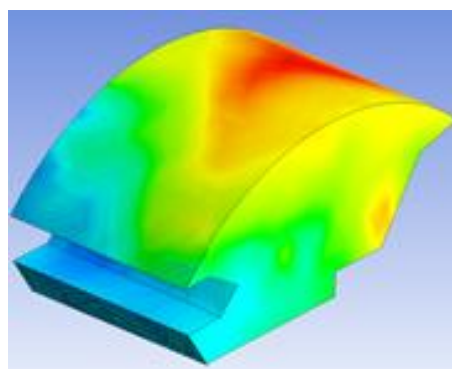


Figure 4. Temperature distribution in existing car cabin

Conclusion

A new body model for the Indian budget car is proposed. The proposed work is targeted to improve the AC performance of budget car by modifying the structure of body. The CAD design for the new model for the passenger car is given. Then the ANSYS CFD is used to analysis the air distribution inside the cabin of the car. The proposed model significantly reduced the temperature in the inside of the car cabin. Thus the performance of the AC system is improved without adding additional air vent in the budget car. The performance clearly shows the difference of the existing and proposed

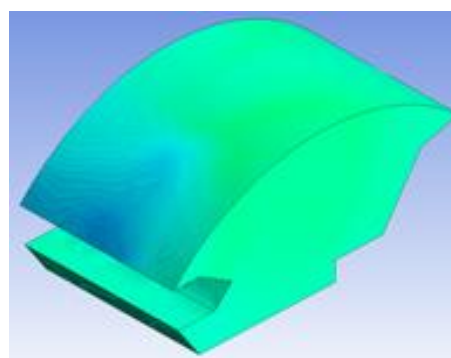


Figure 5. Temperature distribution in proposed car cabin

model and validated the improvement in the air distribution. Ultimately the proposed study proves that the performance a car AC system can increased by altering the structure of the car body.

References

- [1] Sun, T., et al., CFD-Based Modeling of Heat Transfer in a Passenger Compartment, *Automotive Air Conditioning*. Springer International Publishing, On-line first, <https://doi.org/10.1007/978-3-319-33590-2>, 2016
- [2] Madan, D., et al., Ocean Wave Energy Scenario in India, *International Journal of Mechanical and Production Engineering Research and Development*, 8 (2018), Special Issue 6, pp. 582-590
- [3] Vivekanandan, M., et al., Pressure Vessel Design using PV-ELITE Software with Manual Calculations and Validation by FEM, *Journal of Engineering Technology*, 8 (2019), 1, pp. 425-433
- [4] Sathish, T., et al., Design and Fabrication of Industrial Components Using 3D Printing, Materials Today Proceedings, Elsevier Publisher, 5 (2018), 6, pp. 14489-14498
- [5] Karthick, S., Semi Supervised Hierarchy Forest Clustering and KNN Based Metric Learning Technique for Machine Learning System, *Journal of Advanced Research in Dynamical and Control Systems*, 9 (2017), Special Issue 18, pp. 2679-2690
- [6] Karthick, S., TDP: A novel Secure and Energy Aware Routing Protocol for Wireless Sensor Networks, *International Journal of Intelligent Engineering and Systems*, 11 (2018), 2, pp. 76-84
- [7] Sathish, T., et al., Meta-Heuristic Approach to Solve Multi Period Disassembly-To-Order Problem of End-Of-Life Products using Adaptive Genetic Algorithm, *International Journal of Mechanical & Mechatronics Engineering*, 15 (2015), 3, pp. 59-67
- [8] Avudaiappan, T., et al., Potential Flow Simulation through Lagrangian Interpolation Meshless Method Coding, *Journal of Applied Fluid Mechanics*, 11 (2018), Special Issue, pp. 129-134
- [9] Dinesh, S., et al., Experimental Investigation and Optimization of Material Removal Rate and Surface Roughness in Centerless Grinding of Magnesium Alloy Using Grey Relational Analysis, *Mechanica and Mechanical Engineering*, 21 (2017), 1, pp. 17-28
- [10] Sathish, T., Experimental Investigation on Degradation of Heat Transfer Properties of a Black Chromium-Coated Aluminium Surface Solar Collector Tube, *International Journal of Ambient Energy*, On-line first, doi: <https://doi.org/10.1080/01430750.2018.1492456>, 2018
- [11] Karuppusamy, S., et al., Design and Analysis of Automotive Wheel Rim by using ANSYS and MSC Fatigue Software, *Asian Journal of Research in Social Sciences and Humanities*, 6 (2016), 10, pp. 196-212
- [12] Sathish, T., et al., Multi Period Disassembly-to-Order of End-of-Life Product Based on Scheduling to Maximise the Profit in Reverse Logistic Operation, *International Journal of Logistics Systems and Management*, 26 (2017), 3, pp. 402-419
- [13] Sathish, T., Heat Transfer Analysis of Nano-Fluid Flow in a converging Nozzle with different aspect Ratios, *Journal of New Materials for Electrochemical Systems*, 20 (2017), 4, pp. 161-167
- [14] Sathish, T., et al., HAIWF-Based Fault Detection and Classification for Industrial Machine Condition Monitoring, *Progress in Industrial Ecology*, 12 (2018), 1-2, pp. 46-58