

INTERACTION OF MULTIPLE JETS IN BUBBLE ELECTROSPINNING

Hong-Yan LIU^{1,2,a}, Yan-ju YAO², Man-Yu QIAN³

1. Jiangsu R&D Center of the Ecological Textile Engineering & Technology, Yancheng Polytechnic College, China
2. School of Fashion Technology, Zhongyuan University of Technology, Zhengzhou, China
3. National Engineering Laboratory for Modern Silk, College of Textile and Clothing Engineering, Soochow University, 199 Ren-Ai Road, Suzhou, China

^a. Corresponding author. Email: phdliuhongyan@yahoo.com

The bubble electrospinning is a peerless technology for mass-production of various functional nanofibers. During the spinning process, multiple jets are ejected, which might be interacted with each other. The interaction might result in mass transfer, energy transfer and force imbalance, all these factors will greatly affect the mechanical property and morphology of the resultant fibers. A theoretical model is established to study the two-jets combination during the spinning process, the mass conservation and momentum conservation are considered, and the combined fiber's diameter and moving velocity are theoretically elucidated. The present theory analysis can be easily extended to multiple jets interaction.

Keywords: Bubble electrospinning, nanofiber yarn, multiple jets, mathematical model

1. Introduction

Bubble electrospinning[1,2] has attracted more and more attention in the last decade for its high production, it is a totally peerless technology after the electrospinning technology[3] for fabrication of various functional nanofibers. It uses an external force (e.g. the electrostatic force or a blowing air) to overcome the surface tension of the polymer bubble, which is then broken into millions of tiny jets, see Fig.1. The multiple jets fly onto the receptor, and it will be solidified due to solvent evaporation[4]. The multiple jets the spinning process have made it is difficult to control exact the nanofibers' morphology and mechanical properties. It was already proved that the mechanical behavior of nanocomposite depends upon nanoscale structures[5].

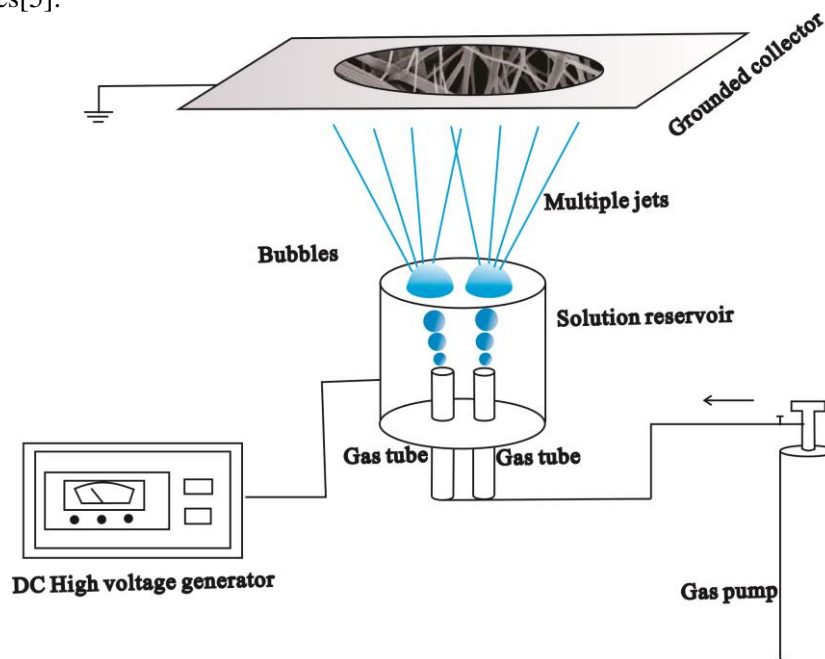


Fig .1 Bubble electrospinning setup

Many researchers investigated the behavior of multiple jets in the traditional electrospinning[6-9], for example, Theron et. al.[6] described the path of multiple jets in the process of electrospinning, and proposed a model by implementing Maxwell equation. Yang[7] designed a special aligned multiple jets setup

to meet high liquid throughput requirements. Wu[8] focused on the parameters influencing multiple jets especially the voltage. The double-switching voltage was adopted to manipulate multiple jets for enhanced throughput. Varesano[9] tested several multiple electrospinning setups, and Li et al.[10] optimized the multiple needle electrospinning with great success. Wu and Liu[11] further improved the multiple electrospinning process and a fractal-like spinning process was proposed, however, neither experiment nor theory was carried out for multiple jets in bubble electrospinning. The interaction between the flying jets will greatly affect the morphology and properties of the obtained nanofiber membranes, this problem becomes even more serious in the bubble electrospinning, because millions and millions of flying jets are formed during the spinning process, and there is no way to control their trajectory when a jet was ejected from a broken bubble.

Bubble electrospinning can produce membranes with nanoscale thickness[12,13]. Qian and He [12] reported that the fragments of a broken bubble can be directly received as a nanoscale membrane, no other technology can match this bubble spinning so far.

2. Thermodynamical model for the jets interaction

During the interaction of the moving jets, there happens the mass and energy transfer, this makes the problems much complex. Inspired by the work[14], the present authors give the following model as illustrated in Fig.2 to study their interaction.

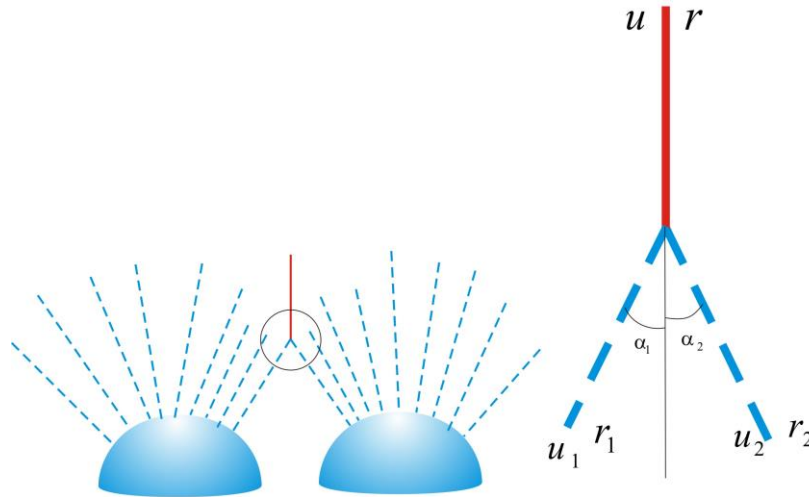


Fig. 2 Scheme of combination of multiple jets in bubble electrospinning

This section considers only two-strand moving jets interaction. The law of mass conservation requires[14]

$$\pi\rho_1u_1r_1^2 + \pi\rho_2u_2r_2^2 = \pi\rho ur^2 \quad (1)$$

where r_1, r_2 and r are, respectively, the radiuses of the combing fibers and the combined fiber, ρ_1, ρ_2 and ρ are, respectively, their densities, u_1, u_2 , and u , respectively, their velocities. In case that $\rho_1 = \rho_2 = \rho$, we have the following relation:

$$u_1r_1^2 + u_2r_2^2 = ur^2 \quad (2)$$

The law of momentum conservation reads[14]

$$\pi\rho_1u_1r_1^2\mathbf{u}_1 + \pi\rho_2u_2r_2^2\mathbf{u}_2 = \pi\rho ur^2\mathbf{u} \quad (4)$$

where $\mathbf{u}_1, \mathbf{u}_2$ and \mathbf{u} are, respectively, velocity vectors. When $\rho_1 = \rho_2 = \rho$, Eq.(4) becomes

$$u_1^2r_1^2 \cos\alpha_1 + u_2^2r_2^2 \cos\alpha_2 = u^2r^2 \quad (5)$$

where α_1 and α_2 are, respectively, the inclined angles between the combing jets and the combined jet, see Fig.2.

According to Eqs.(2) and (5), the combined jet has the velocity

$$u = \frac{u_1^2r_1^2 \cos\alpha_1 + u_2^2r_2^2 \cos\alpha_2}{u_1r_1^2 + u_2r_2^2} \quad (6)$$

and its radius can be calculated as

$$r = \frac{u_1 r_1^2 + u_2 r_2^2}{\sqrt{u_1^2 r_1^2 \cos \alpha_1 + u_2^2 r_2^2 \cos \alpha_2}} \quad (7)$$

We consider a special case that $u_1 = u_2 = u_0$, $r_1 = r_2 = r_0$ and $\alpha_1 = \alpha_2 = \alpha$, Eqs.(6) and (7) reduce to, respectively, the following simple cases.

$$u = u_0 \cos \alpha \quad (8)$$

and its radius can be calculated as

$$r = \frac{2u_1 r_1^2}{\sqrt{2u_1^2 r_1^2 \cos \alpha_1}} = \frac{2r_0}{\sqrt{2 \cos \alpha}} \quad (9)$$

From Eq.(9), it is obvious that

$$\lim_{\alpha \rightarrow 0} r \rightarrow \sqrt{2} r_0 \quad (10)$$

and

$$\lim_{\alpha \rightarrow \pi/2} r \rightarrow \infty \quad (11)$$

Eq.(10) implies that when the two jets having same radius and same velocity move parallelly with mass and energy transfer, the final radius is $\sqrt{2}r_0$. However, when the two jet are interacted perpendicularly ($\alpha = \pi/2$), the resultant fiber tends to be infinitely large. This theoretical result can be used for designing a perpendicular bubble spinning for porous fibers.

When $u_1 = u_2 = u_0$, Eq.(7) becomes

$$r = \frac{r_1^2 + r_2^2}{\sqrt{r_1^2 \cos \alpha_1 + r_2^2 \cos \alpha_2}} \quad (12)$$

When $\alpha_1 = \alpha_2 = \alpha$, Eq.(12) can be further simplified as

$$r = \frac{r_1^2 + r_2^2}{\sqrt{(r_1^2 + r_2^2) \cos \alpha}} \quad (13)$$

For multiple jets interaction, Eqs.(1) and (4) are modified, respectively, as follows

$$\pi \rho_1 u_1 r_1^2 + \pi \rho_2 u_2 r_2^2 + \dots + \pi \rho_n u_n r_n^2 = \pi \rho u r^2 \quad (14)$$

$$\pi \rho_1 u_1 r_1^2 \mathbf{u}_1 + \pi \rho_2 u_2 r_2^2 \mathbf{u}_2 + \dots + \pi \rho_n u_n r_n^2 \mathbf{u}_n = \pi \rho u r^2 \mathbf{u} \quad (15)$$

where the subscript “n” imply the n-th jet.

A dynamical model for the system can be established in a similar way as those in Refs.[15,16], and an instability condition for the spinning process can be theoretically analyzed like those in Refs.[17-20]. The stable property is the periodic motion, while the instable property is a chaotic one. Zhang and He showed chaotic properties of Sirofil yarn spinning[15], if the uncertain properties due to environment change and solvent evaporation, an uncertain chaotic system[21-28] should be considered.

3. Experimental verification

An experiment was designed, the experimental setup was shown in Fig.1, multiple bubbles were formed and broken simultaneously, and the jets are interacted with each other with different angles. The experimental process is similar to that in Ref.[1]. Fig.3 and Fig.4 were the SEM illustrations of the obtained nanofibers.

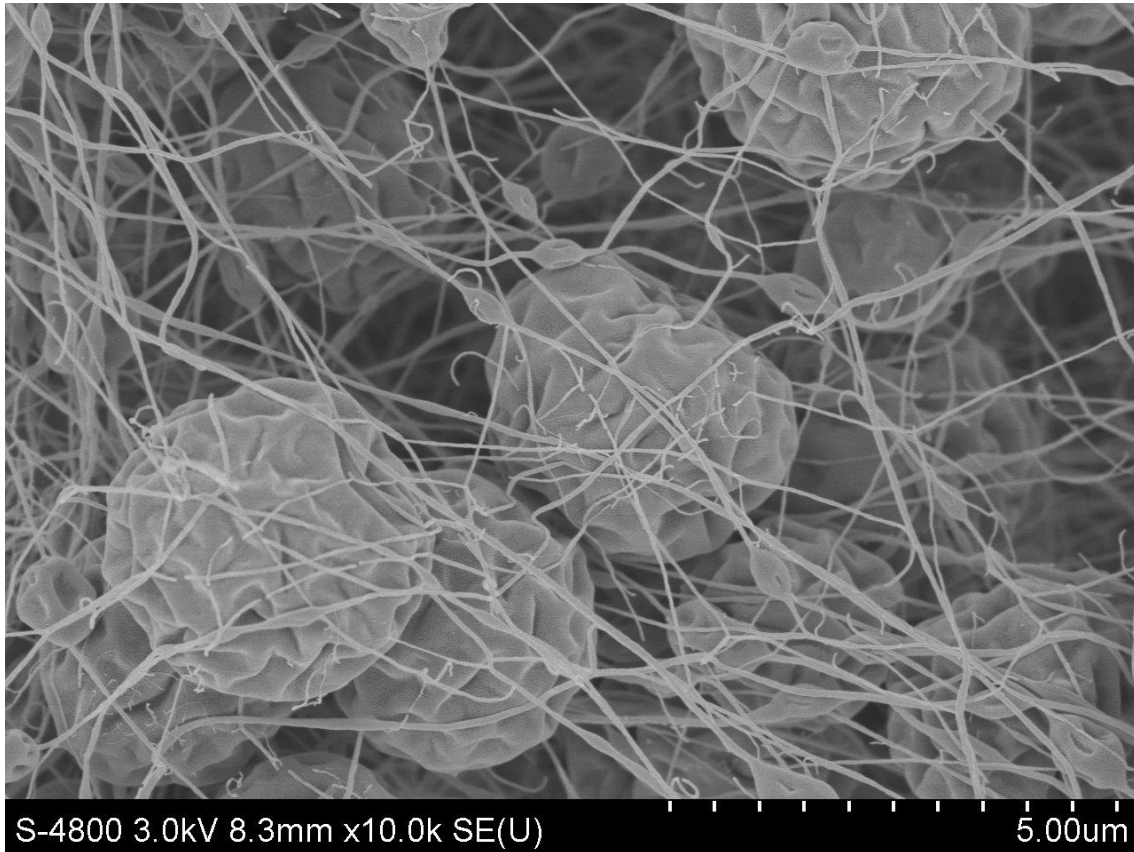


Fig.3 Fibers obtained by the bubble electrospinning using 23% Polyvinylpyrrolidone (PVP) aqueous solution, the applied voltage was set at 35 kV and the bubble top to the collector distance was set as 20 cm.

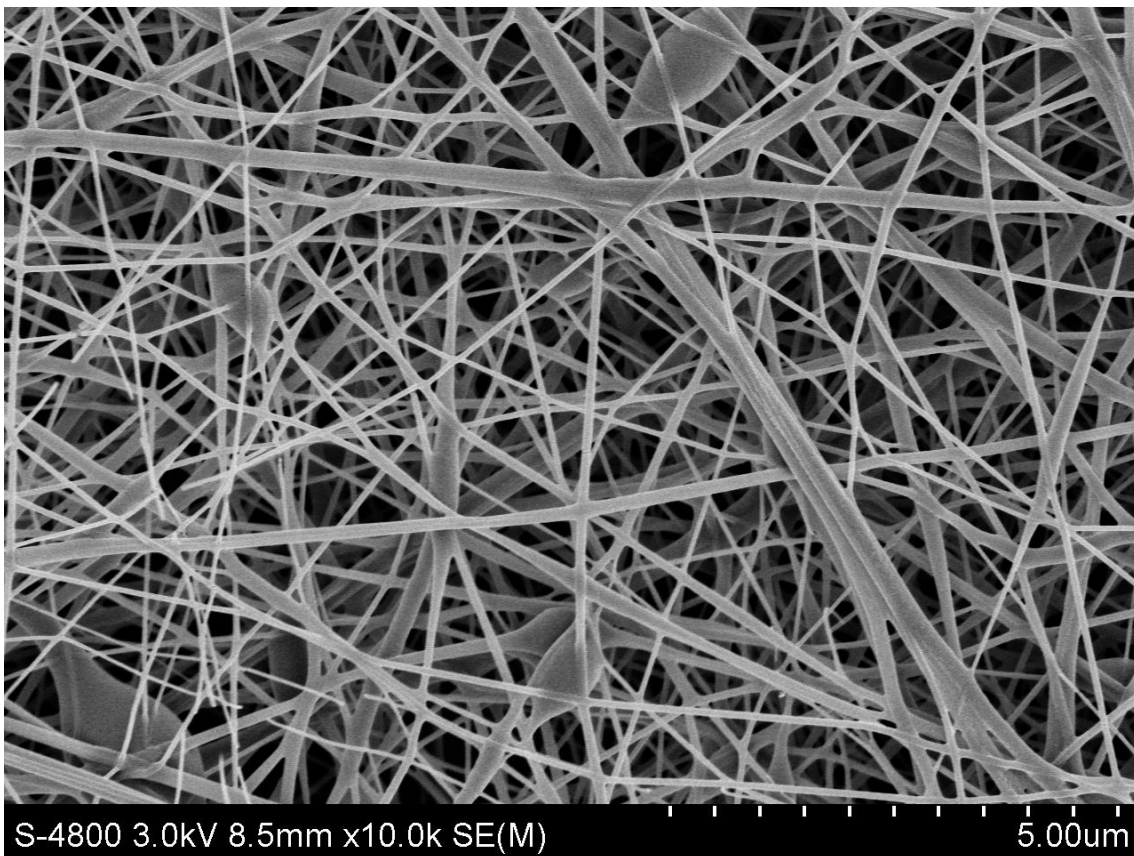


Fig.4 Fibers obtained by the bubble electrospinning using 8% Polyacrylonitrile (PAN) solution with DMAC as solvent. The applied voltage was set at 20 kV and the bubble top to the collector distance was set as 20 cm.

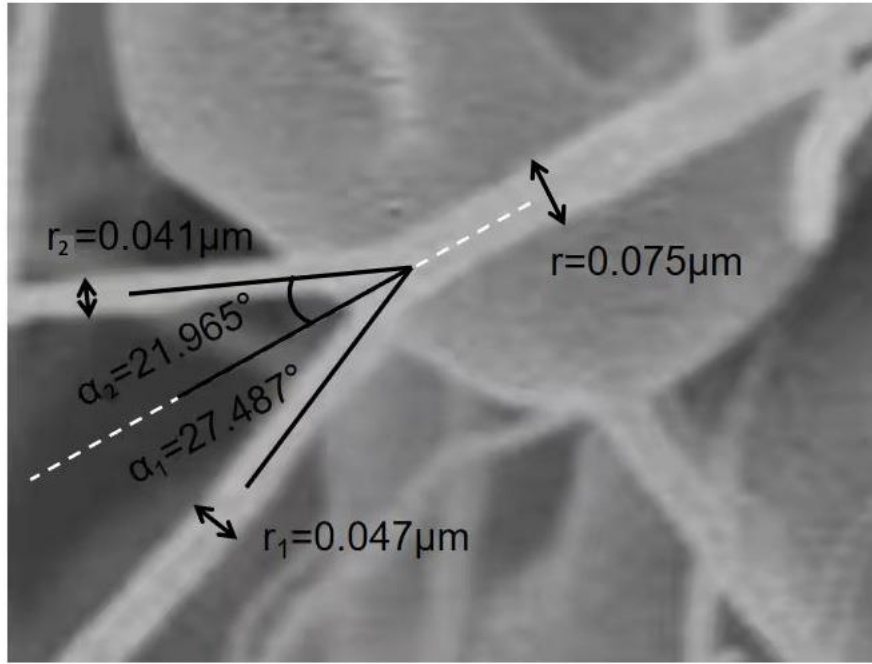


Fig.5 The geometrical relation of the two combined fibers.

From Fig.4, we found a typical interaction, and the main parameters were given in Fig.5. We assumed that $u_1 / u_2 = 1$, this results in a modification of Eq.(7):

$$r = \frac{r_1^2 + r_2^2}{\sqrt{r_1^2 \cos \alpha_1 + r_2^2 \cos \alpha_2}} \quad (16)$$

From Fig.5 we have $r_1 = 0.047 \mu m$, $r_2 = 0.041 \mu m$, $r = 0.075 \mu m$, $\alpha_1 = 27.487^\circ$ and $\alpha_2 = 21.965^\circ$. By Eq.(16), we have

$$r = \frac{0.047^2 + 0.041^2}{\sqrt{0.047^2 \cos 27.487^\circ + 0.041^2 \cos 21.965^\circ}} = 0.065579 \mu m \quad (17)$$

While the experimental value is $r = 0.075 \mu m$, the 12.5% is reasonable, considering the assumption $u_1 / u_2 = 1$ is very much approximate.

Discussion and Conclusion

For the first time ever, we have proposed a theoretical model dealing with a complex combination process of the two moving jets in the bubble electrospinning. This model is able to predict the combined jet's diameter and velocity, shedding a bright light on controlling the combined fibers in the practical spinning process.

Acknowledgements

The work is supported by Jiangsu R&D Center of the Ecological Textile Engineering & Technology, Yancheng Polytechnic College under grant No. YGKF202010.

References

1. Li, X.X., He, J.H. Bubble Electrospinning with an Auxiliary Electrode and an Auxiliary Air Flow, *Recent Patents on Nanotechnology*, 14(2020), No.1, pp. 42-45
2. Liu, G.L., et al., Last Patents on Bubble Electrospinning, *Recent Patents on Nanotechnology*, 14(2020), No.1, pp.5-9

3. Liu, L.G., et al. Dropping in electrospinning process: A General Strategy for Fabrication of Microspheres, *Thermal Science*, 25(2021), No.2, pp. 1295-1303
4. Lin, L., et al. Fabrication of PVDF/PES nanofibers with unsmooth fractal surfaces by electrospinning: A General Strategy and Formation Mechanism, *Thermal Science*, 25(2021), No.2, pp.1287-1294
5. Dmitriev, A.I., Numerical model of a local contact of a polymer nanocomposite and its experimental validation, *Facta Universitatis-Series Mechanical Engineering*, 19(2021), No.1, pp.79-89
6. Theron, S. A., et al. Multiple jets in electrospinning: experiment and modeling, *Polymer* 46(2005), No.9, pp. 2889-2899.
7. Yang, Y., et al. Multiple jets in electrospinning, *2006 IEEE 8th International Conference on Properties & applications of Dielectric Materials*, IEEE, 15 January 2007
8. Wu, Y.-K., et al. A double-switching voltage: Controlling multiple jets in electrospinning, *Materials Letters* 233 (2018), pp. 359-362.
9. Varesano, A., et al. Experimental investigations on the multi-jet electrospinning process, *Journal of Materials Processing Technology* 209 (2009), No.11, pp.5178-5185.
10. Li, X. X., et al. Multiple needle electrospinning for fabricating composite nanofibers with hierarchical structure, *Journal of Donghua University(English Edition)*, 38(2021), No.1, pp. 63-67.
11. Wu, YK and Liu, Y. Fractal-like multiple jets in electrospinning process, *Thermal Science*, 24(2020), No.4, pp.2499-2505
12. Qian, M.Y., He, J.H., Collection of polymer bubble as a nanoscale membrane, *Surfaces and Interfaces*, 28(2022), Dec., 101665
13. He, J.H., et al. The Maximal Wrinkle Angle During the Bubble Collapse and Its Application to the Bubble Electrospinning, *Frontiers in Materials*, 8(2022), Feb., 800567
14. He, J.-H., et al. Quasistatic model for two-strand yarn spinning, *Mechanics Research Communications* 32.2 (2005): 197-200.
15. Zhang, LN and He, JH. Periodic and chaotic motion in Sirofil yarn spinning, *Fibers & Textiles in Eastern Europe*, 16 (2008) , No.2, pp.27-29
16. Zhang, LN and He, JH. Resonance in Sirospun yarn spinning using a variational iteration method, *Computers & Mathematics with Applications*, 54 (2007), Nos.7-8 , pp.1064-1066
17. He, J.H., et al., Nonlinear instability of two streaming-superposed magnetic Reiner-Rivlin Fluids by He-Laplace method, *Journal of Electroanalytical Chemistry*, 895(2021), 115388
18. He, J.-H.; et al. Periodic Property and Instability of a Rotating Pendulum System. *Axioms*, 10(2021), 191.
19. He, C.H., et al. Hybrid Rayleigh -Van der Pol-Duffing Oscillator (HRVD): Stability Analysis and Controller, *Journal of Low Frequency Noise, Vibration & Active Control*, 2021, DOI: 10.1177/14613484211026407
20. Tian,D., et al. Fractal N/MEMS: from pull-in instability to pull-in stability, *Fractals*, 29(2021): 2150030
21. Chen, C.L., et al., Design of extended backstepping sliding mode controller for uncertain chaotic systems, *International Journal of Nonlinear Sciences and Numerical Simulation*, 8(2007), No.2, pp.137-145
22. Yau, H.T., et al., Synchronization control for a class of chaotic systems with uncertainties, *International Journal of Bifurcation and Chaos*, 15(2005), No.7, pp.2235-2246
23. Lin, J.-S., et al., Synchronization of unidirectional coupled chaotic systems with unknown channel time-delay: adaptive robust observer-based approach, *Chaos, Solitons and Fractals*, 26(2005), No.3, pp.971-978.
24. Yau, H.T., Generalized projective chaos synchronization of gyroscope systems subjected to dead-zone nonlinear inputs, *Physics Letters A*, 372(2008), No. 14, pp. 2380-2385
25. Yau, H.T., Nonlinear rule-based controller for chaos synchronization of two gyros with linear-plus-cubic damping, *Chaos, Solitons and Fractals*, 34(4)(2007), pp 1357-1365, 2007.
26. Lin, C.J.,et al., Chaos suppression control of a coronary artery system with uncertainties by using variable structure control, *Computers & Mathematics with Applications*, 64(2012), No.5, pp.988-995.
27. Yau, H.T., et al., Comparison of Extremum-Seeking Control Techniques for Maximum Power Point Tracking in Photovoltaic Systems, *Energies*, 4(2011), No.12, pp. 2180-2195.
28. Chen,J.H., et al., Design and implementation of FPGA-based Taguchi-chaos-PSO sun tracking systems, *Mechatronics*, 25(2015), Frb., pp. 55-64

Received: Dec., 28, 2021

Revised: March 8, 2022

Accepted: April 2, 2022