

NUMERICAL SIMULATION OF PLASMA GASIFICATION OF OIL-BASED DRILLING CUTTINGS

Liang HU¹, Hailong YU^{1,}, Yayun XU¹, Xinying DUAN¹, Xulei WU¹, Yunlan SUN¹, Haiqun CHEN^{1,*}, He ZHENG² and Bo WU³*

^{*1}School of Petroleum Engineering, Changzhou University, Changzhou, China

²Sinopec East China Petroleum Engineering Co., LTD. Jiangsu Drilling Company

³East China Petroleum Engineering Company, Sinopec, Nanjing 210019, China

*Hailong Yu; Email: yhl.doctor@163.com

*Haiqun Chen; Email: chenhq@cczu.edu.cn

Abstract: In this paper, Aspen Plus commercial software is used to simulate the plasma gasification process of oil-based drilling cuttings, and the numerical simulation results are analyzed in detail. The conclusions can provide theoretical guidance for subsequent experiments and practical engineering applications. A set of reactor models suitable for gasification of such substances was established by using Gibbs' free energy minimization principle, and the accuracy of the model was verified by comparing the numerical simulation results with the experimental results. In this model, the effects of plasma torch power, air equivalent ratio, moisture content of feed, and the amount of CO₂ added on the gasification results were simulated. Through systematic analysis, the optimal gasification parameters are determined as follows: output power of plasma torch is 27.5 kW, air equivalent ratio is 0.26, moisture content of feed is 6%, and the amount of CO₂ added is 6 kg/h.

Key words: Aspen plus; Plasma; Oil-based drilling cuttings; Gasification

0. Introduction

In recent years, with the Chinese government's continuous improvement of environmental protection requirements, treatment standards for oil-based drilling cuttings (OBDC) generated during the oil and gas production process have also improved in recent years, which requires the development of a set of efficient treatment schemes. High temperature plasma is used to gasify and melt OBDC [1, 2], which can decompose the toxic and harmful substances in OBDC at high temperatures and melt the solid products into glassy state molten slag to avoid secondary pollution. Recycling can be met by the products after processing (syngas and slag)[3]. The multi-carbon macromolecular organic matter in the OBDC is rapidly pyrolyzed in the gasifier to generate small-molecule syngas while the slag forms a stable glassy state molten slag after quenching[4], and the heavy metals are wrapped by the vitreous components with extremely low permeability, which can be used for resource utilization or directly buried safely. The primary emphasis of this research is the gasification of OBDC.

Aspen Plus is a large-scale simulation system commonly used for chemical process simulation, which originated from the Massachusetts Institute of Technology. It is also widely used to simulate various gasification processes. The application of Aspen Plus to simulate the treatment of solid waste by plasma gasification systems is widely used throughout the world. Agon et al.[5] used Aspen Plus to simulate the plasma gasification process of garbage-derived fuel and plastic solid waste. In this regard, many scholars in China are also studying Aspen Plus, and it can accurately simulate the impact of different factors on the gasification process.

At present, Aspen Plus is used to simulate the pyrolysis and gasification processes of biomass, municipal solid waste, oily sludge, etc.[6-10], and OBDC is relatively few to study. The main purpose of this paper is to analyze the influence of plasma equipment parameters on the gasification of OBDC. The model used is different from some models in other papers, which is more consistent with the actual working condition of the plasma reactor. In this model, the temperature of LTR changes with HTR, which is obviously more reasonable than the fixed temperature of LTH in most papers. Furthermore, the majority of the present models focus on the impact of temperature on the gasification outcomes but neglect to account for the impact of a change in the carrier gas with power on those outcomes, which is inconsistent with plasma reactors' unique properties. In this paper, when analyzing the influence of power on gasification results, the carrier gas flow also follows the change of power, which accords with the actual situation in operation. For the next tests and real-world engineering applications, this study can therefore offer a more accurate reference and theoretical foundation.

1. Establishment and verification of the model

1.1. Modeling

Three reactors (pyrolytic gasification, recombination) were used to simulate the OBDC gasification process. The following is a model flow chart of OBDC pyrolysis and gasification in plasma gasifier referring to the EPJ plasma gasification model used by Mountouris et al.[11], as shown in Figure 1.

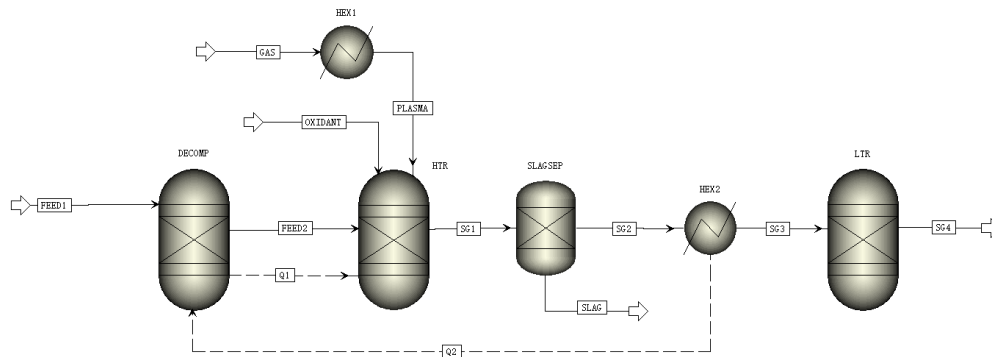


Fig. 1 Model flow diagram of plasma gasified OBDC

Prior to using Aspen Plus to simulate OBDC pyrolysis, the main components involved in the reaction need to be known and their physical properties determined. For unconventional components, different calculation models need to be selected[12]. For this model, the physical property method is RKS-BM, and The HCOALGEN enthalpy model and the DCOALIGT density model are adopted. Input data for industrial analysis, element analysis, and sulfur element analysis of FEED1 via the PROXANAL, ULTANAL, and SULFANAL options in the NC Solid Tab. The model is based on the

following assumptions during the OBDC gasification process: the gasification process is stable; The pressure and temperature at each point in the reactor are equal, and the parameters do not change with the reaction time; The pressure drop and pressure loss in each process and the heat dissipation loss in the reaction process are not considered; Each reaction process can be completed quickly and fully; Organic elements in OBDC can be completely vaporized; The non-gasification part of waste OBDC in the reaction is regarded as ash and does not participate in the reaction[13].

The gasifier will be simulated by three reactors, DECOMP (pyrolysis reactor), HTR (high temperature reactor), and LTR (low temperature reactor), according to the temperature field distribution characteristics in the plasma gasifier[14]. The pyrolysis reactor only considers the total mass balance and reacts according to the yield relationship between the inputs. The organic matter is pyrolyzed into its basic elements; By the principle of Gibbs free energy minimization, the system composition and phase distribution are calculated when chemical equilibrium and phase equilibrium are simultaneously reached in high-temperature and low-temperature reactors. To simulate the heat transfer in the gasifier, the energy transfer is established in the model. Using HEX1 to heat GAS to simulate high temperature jets from plasma torches, and the thermal power of GAS transfer was used to simulate the output power in the furnace.

1.2. Validating models

To verify the reliability of the model, the model will be used to simulate the experiments in the Agon's paper[5], and the simulation results will be compared with the experimental data. This document provides experimental data on the gasification of refuse-derived fuels (RDF) at high temperatures, and its industrial analysis and elemental analysis are shown in Table 1.

Tab. 1 Industrial analysis and elemental analysis of RDF

Industrial analysis/%				Elemental analysis/%						LHV/
M_{ad}	FC_{ad}	A_{ad}	V_{ad}	C	H	O	N	Cl	S	(MJ/kg)
4.60	8.60	22.10	69.30	46.80	5.70	22.30	1.25	1.60	0.26	22.37

Model parameter setting: The feed rate was 29 kg/h, the power was 70 kW, and the flow rates of Ar, CO₂, and O₂ in the GAS gas were 87 L/min, 177 L/min, and 93 L/min, respectively.

The comparison results of simulated data and experimental data are shown in Table 2. In the simulation results, the error range of syngas components except CH₄ is within 8%, which indicates that the model is suitable for the simulation of similar plasma gasification processes within the error range.

Tab. 2 Simulation data were compared with experimental data

Volume fraction of syngas /%	Experimental data/%	Simulation data/%	Error/%
H ₂	30.0	27.90	7.00%
CO	46.1	49.60	7.60%
CO ₂	11.0	11.63	5.70%
CH ₄	2.50	0.84	66.35%
Ar	10.04	10.40	3.49%

2. Setting simulation conditions

Taking OBDC from an oilfield in Jiangsu province as raw materials, the above model is applied to simulate the calculation. The industrial analysis and elemental analysis of OBDC are shown in Table 3.

Tab. 3 Industrial analysis and elemental analysis of OBDC

Industrial analysis/%				Elemental analysis/%						LHV/
M_{ad}	FC_{ad}	A_{ad}	V_{ad}	C	H	O	N	Cl	S	(MJ/kg)
3.05	2.38	74.42	20.15	13.70	1.85	7.81	1.17	0.37	0.68	7.20

In this simulation, the feed rate of OBDC was set at 50 kg/h, and N_2 was used as an inert medium in the plasma torch. To ensure the safety and reliability of the plasma torch at different output powers, N_2 gas intake should be positively correlated with the output power. The pressure of each part was 1 bar throughout the simulation.

The gasification of OBDC in a high temperature plasma gasifier is influenced by system parameters and the atmosphere in the furnace, such as plasma torch power, oxygen equivalent ratio, and so on, and is primarily manifested as syngas composition, carbon conversion, syngas calorific value, and plasma gasification efficiency[15].

The ratio of syngas heat generated in the gasification process to the calorific and consumed by OBDC reflects the energy utilization in the plasma gasification process.

Plasma gasification efficiency is the ratio of the calorific of syngas to the sum of heat generated by OBDC and heat consumed in the process of gasification, which reflects the energy utilization rate in plasma gasification process.

$$\eta_p = \frac{m_s \cdot LHV_s}{m_f \cdot LHV_f + W_T / \eta_e} \times 100\% \quad (1)$$

Where η_p is the plasma gasification efficiency in %; m_s is the syngas mass flow rate, measured in Nm^3/hr ; LHV_s is the syngas low calorific value, measured in MJ/Nm^3 ; m_f denotes the feeding rate of OBDC in kg/hr ; LHV_f denotes the low calorific value of OBDC, measured in MJ/kg ; W_T denotes the plasma torch's output power in MW; η_e is the average efficiency of the power plant, which is 34.5% by default in this paper[16].

3. Results and Analysis

3.1. Effect of plasma torch output power on gasification results

To study the influence of plasma torch output power on OBDC gasification results, the simulated conditions are set as follows: The feeding rate for OBDC is 50 kg/h, the temperature is $25^\circ C$, the pressure is 1 bar, and ER (ratio of the actual value of oxygen to the theoretical value) = 0.2.

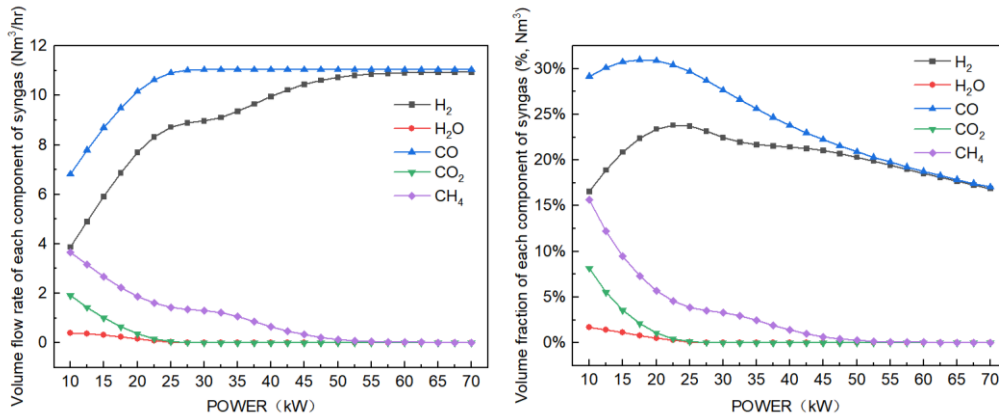


Fig. 2 The effect of output power on syngas composition

As can be seen from the figure, with the increase of power, the volume flows of CO and H₂ continue to increase, while the volume flows of CO₂ and CH₄ continue to decrease. The increase in output power enhances the endothermic reactions $C + CO_2 \rightarrow 2CO$, $C + H_2O \rightarrow CO + H_2$ and $CH_4 + H_2O \rightarrow CO + 3H_2$ [17]. The increase in the output power of the plasma torch promotes the generation of H₂ and CO. However, it can be seen from the figure that the volume fraction of CO and H₂ in the syngas decreases continuously when the output power of the plasma torch increases to 27.5kW. This is the reason that with the increase of power, the carrier gas into the furnace also increases, increasing the total amount of syngas, so the volume fraction of CO and H₂ begins to decrease [18].

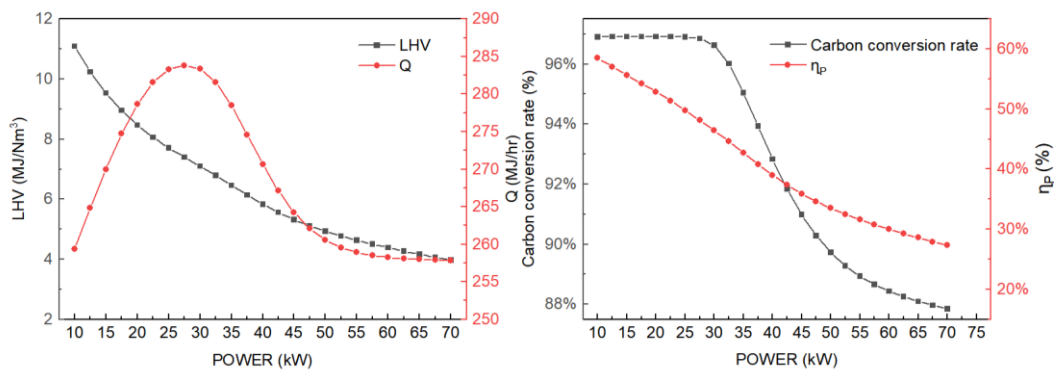


Fig. 3 Influence of power on gasification effect

As shown in Figure 3, the calorific value of syngas decreases with the increase of power, while the calorific value of syngas increases first and then decreases with the increase of power, reaching its peak value when the power is at 27.5kW. With the change of plasma torch output power, the carbon conversion rate of OBDC remains unchanged at 10kW-27.5kW and then begins to decrease. The efficiency of plasma gasification decreases with the increase of power, indicating that the energy utilization rate of plasma torch decreases. Under the condition of ensuring normal pyrolysis of the system, the output power of the plasma torch should be controlled as small as possible, which is beneficial to saving electricity.

3.2. Effect of ER on gasification results

To study the influence of ER on OBDC gasification results, the simulated conditions are set as follows: The feeding rate for OBDC is 50 kg/h, the temperature is 25°C, the pressure is 1 bar, ER varies from 0 to 1, and the output power of the plasma torch is 30kW.

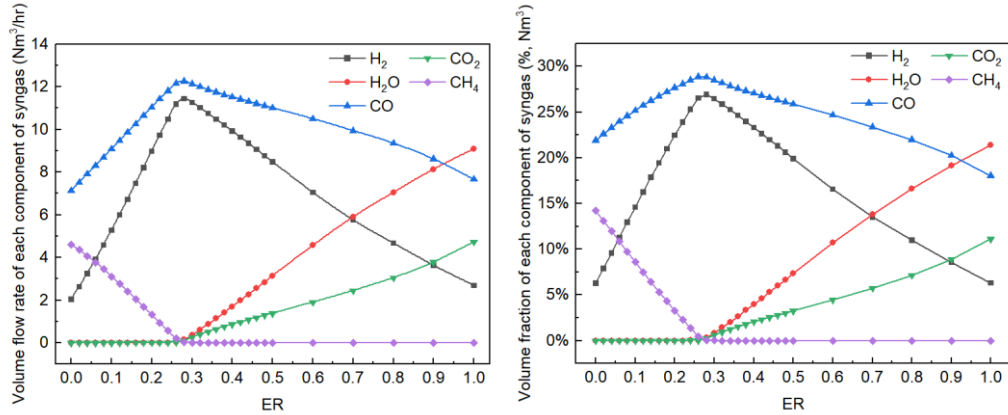


Fig. 4 The effect of ER on syngas composition

Figure 4 shows the influence of ER on syngas components. CO and H₂ increase continuously when ER < 0.26, and the volume fractions of CO and H₂ begin to decrease when ER > 0.26; however, CH₄ decreases with the increase of ER, and reaches the lowest when ER = 0.26; The changing trend of CO₂ and H₂O was opposite to that of CH₄ and began to increase when ER > 0.26. The reason for this change in syngas composition is that with the increase of ER, reactions $C + H_2O \rightarrow CO + H_2$, $2CH_4 + O_2 \rightarrow 2CO + 4H_2$ and $C + CO_2 \rightarrow 2CO$ are promoted, so the production of H₂ and CO in syngas increases, while the production of CH₄ decreases; In the latter stage, with the increase of ER, too much O₂ is involved in the reaction, which promotes reactions $2CO + O_2 \rightarrow 2CO_2$ and $2H_2 + O_2 \rightarrow 2H_2O$, leading to the decrease of H₂ and CO production in syngas and the increase of CO₂ and H₂O production.

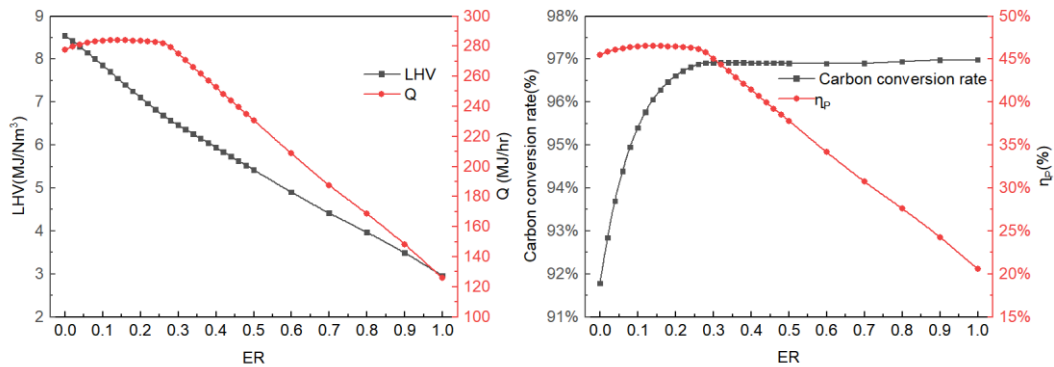


Fig. 5 Influence of ER on gasification effect

As shown in Figure 5, the calorific value of syngas decreases with the increase of ER, but the calorific value of syngas increases when ER < 0.26. Subsequently, the calorific value of syngas begins to decrease due to the decrease of H₂ and CO output and the increase of CO₂ and H₂O output. The total calorific value of the syngas decreases due to the continuous heat release of reaction $2CH_4 + O_2 \rightarrow 2CO + 4H_2$, while when ER > 0.26, the calorific value decreases due to the decrease of CO and H₂ volume fractions in the syngas. The carbon conversion rate increases with the increase of

ER because the remaining fixed carbon in the OBDC is oxidized with the increase of O₂. The carbon conversion rate tends to be stable when ER>0.26. The gasification efficiency is positively correlated with the calorific value of syngas and increases slowly when ER<0.26. When ER>0.26, the efficiency of plasma gasification begins to decrease.

3.3. Effect of moisture content on gasification results

The moisture content of OBDC has a great influence on the gasification result. To study the effect of it the gasification results, the simulation conditions are set as follows: the feeding rate for OBDC is 50 kg/h, the temperature is 25°C, the pressure is 1 bar, ER=0.2, the output power of the plasma torch is 30 kW, and the moisture content varies from 3% to 20%.

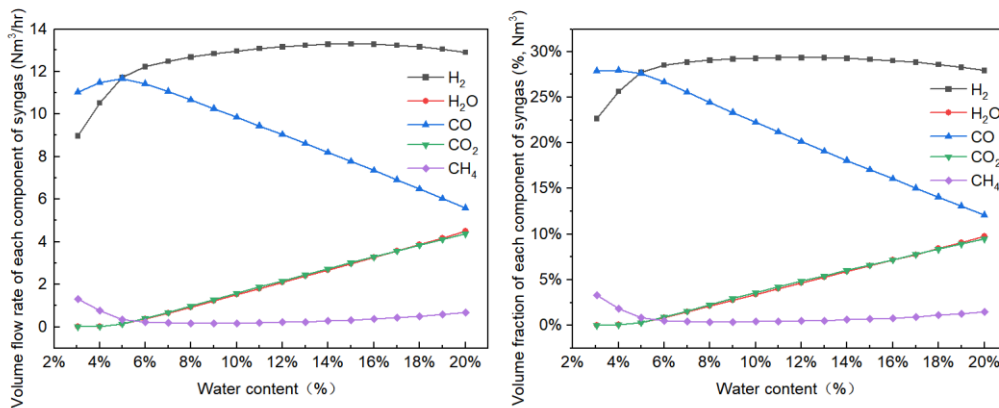


Fig. 6 The effect of water content on syngas composition

The influence of water content on the volume fraction of each component of syngas is shown in Figure 6. It can be seen that CO₂ and H₂O in syngas begin to increase and CO and CH₄ begin to decrease when water content is 5%. The volume fraction of H₂ continues to increase when water content is less than 8% and tends to be stable when water content is greater than 8%. Water content has the greatest influence on the volume fraction of CO and CO₂ in syngas.

When the water content is less than 5%, water vapor participates in the reaction, and the yield of reaction $C + H_2O \rightarrow CO + H_2$, CO and H₂ begins to increase at high temperatures[19]. When the water content is more than 5%, the temperature field in the furnace will be affected and the water-gas conversion reaction $CO + H_2O \rightarrow CO_2 + H_2$ will be promoted at the same time.

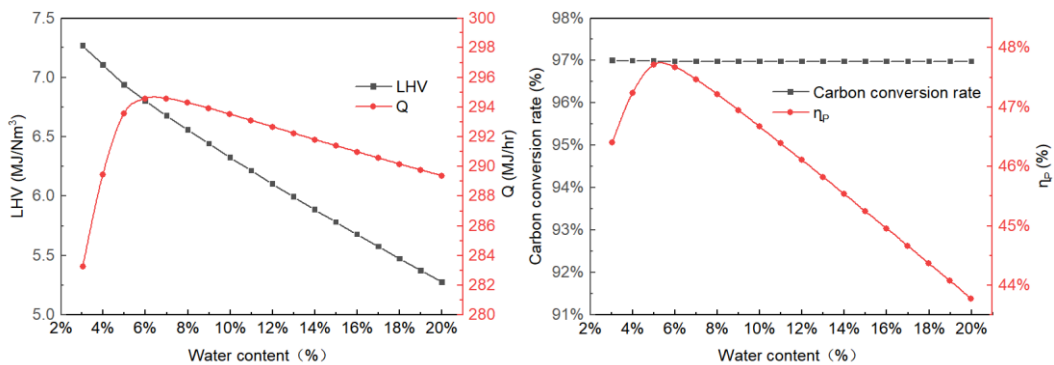


Fig. 7 Influence of water content on gasification effect

As shown in Figure 7, the calorific value of syngas continues to decrease with the increase in moisture content. However, the total calorific value of syngas keeps increasing when the water content

is less than 5% and decreases when the water content is more than 5%. The decrease in calorific value is due to the decrease in the proportion of combustible components of syngas due to the addition of water. When the water content is less than 5%, the efficiency of plasma gasification increases with the increase in water content. When the water content is more than 5%, the efficiency decreases gradually, and the changing trend is consistent with the changing trend of calorific value, while the carbon conversion remains unchanged.

3.4. Effect of the amount of CO₂ added on gasification results

Different gasification agents have a great influence on the gasification results of OBDC. A suitable gasification agent can improve the gasification efficiency of OBDC. To study the effect of CO₂ on OBDC gasification results, the simulated conditions are set as follows: the feeding rate for OBDC is 50 kg/h, the temperature is 25 °C, the pressure is 1 bar, ER=0, the output power of the plasma torch is 30 kW, and the amount of CO₂ added varies from 0 kg/h to 18 kg/h.

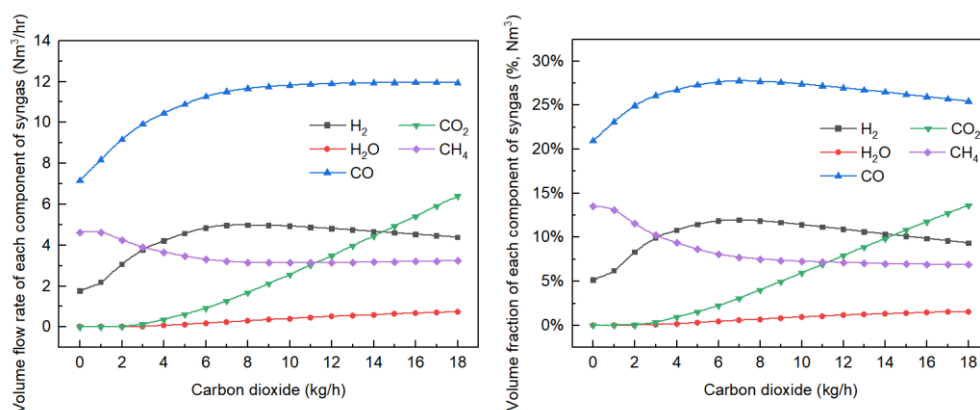


Fig. 8 The effect of the amount of CO₂ added on syngas composition

As shown in Figure 8, when the amount of CO₂ added is less than 6 kg/h, the volume fractions of CO and H₂ increase significantly, while CH₄ shows a trend of decreasing first and then increasing. When the amount of CO₂ added is greater than 6 kg/h, the volume fraction of CO increases slowly, the volume fraction of H₂ begins to decrease, and CH₄ tends to be stable. At this time, H₂O and CO₂ begin to appear in syngas. The reason for such a change in syngas composition is that when the amount of CO₂ added is less than 6 kg/h, reactions $2C_nH_m + 2nCO_2 \rightarrow mH_2 + 4nCO$ and $CO_2 + C \rightarrow 2CO$ occur in the gasifier; when the amount of CO₂ added is greater than 6 kg/h, a small amount of reaction $CO_2 + H_2 \rightarrow CO + H_2O$ occurs.

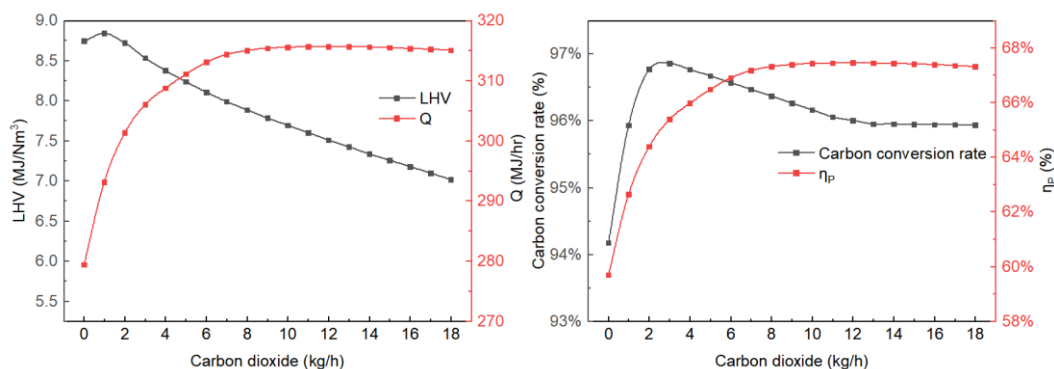


Fig. 9 Influence of the amount of CO₂ added on gasification effect

As shown in Figure 9, the calorific value of syngas decreases continuously with the increase of CO₂ addition, but the number of carbon atoms in the combustible component of syngas increases due to the addition of CO₂, so the total calorific value of syngas keeps increasing. However, with the increase in CO₂ addition, the total calorific value tends to be stable. After removing the number of carbon atoms in CO₂ into the furnace, the carbon conversion rate increases first and then decreases with the increase of CO₂ into the furnace. This is because CO₂ acts as an oxidant at the beginning of the reaction, accelerating the oxidation of carbon atoms in the raw material. Later, excessive CO₂ inhibits the participation of carbon atoms in the reaction in the feed, so the carbon conversion rate drops slowly and then stabilizes at around 96%. The variation trend of plasma gasification efficiency is consistent with the total calorific value of syngas[20].

4. Conclusion

The following conclusions can be obtained from the numerical simulation: the proportion of active component CO+H₂ in syngas increases as plasma torch output power, ER, water content, and CO₂ addition increase. Considering the factors such as carbon conversion rate, calorific value, and gasification efficiency, appropriate parameters should be selected to achieve a balance between energy consumption and treatment effect. Therefore, the optimal theoretical input power of this model should be 27.5 kW, ER=0.26, water content is 5%, and CO₂ addition is 6 kg/h. Because the gasifier in the actual experiment and industrial production process is not adiabatic, the input power of the plasma torch does not necessarily equal the output power, so the actual operation power should be greater than this value, and the specific numerical should be determined according to the specific situation of the equipment. This value is only for guidance and reference.

Acknowledgment

Support for this work was provided by the Postgraduate Research & Practice Innovation Program of Jiangsu Province, China (Project No. KYCX21_2814, KYCX21_2815, SJCX22_1432 and SJCX22_1437). Changzhou University-Sinopec East China Petroleum Engineering Co., LTD. University-enterprise cooperative scientific research project: Research on plasma high temperature degradation process and device of oil-based drilling cuttings (Contract No. 2021K2450).

References

- [1] Sanlisoy, A., Carpinlioglu, M.O., A review on plasma gasification for solid waste disposal, *International Journal of Hydrogen Energy.*, 42(2016), 2, pp. 1361-1365
- [2] Qin, B., Zhao, L., et al., Study on Viscosity Reducing and Oil Displacement Agent for Water-Flooding Heavy Oil Reservoir, *China Petroleum Processing and Petrochemical Technology.*, 24(2022), 1, pp. 11-18.
- [3] Ismail, H.Y., Abbas, A., et al., Pyrolysis of waste tires: A modeling and parameter estimation study using Aspen Plus, *Waste Management.*, 60(2017), pp. 482-493
- [4] Lv, Q.W., Wang, L.A., et al., Pyrolysis of oil-based drill cuttings from shale gas field: Kinetic, thermodynamic, and product properties, *Fuel.*, 233(2022), 124332, pp. 1-5
- [5] Agon, N., Hrabovský, M., et al., Plasma gasification of refuse derived fuel in a single-stage system using different gasifying agents, *Waste Management.*, 47(2016), Pt B, pp. 246-255

- [6] Luca, M., Isam, J., Plasma gasification of municipal solid waste with variable content of plastic solid waste for enhanced energy recovery, *International Journal of Hydrogen Energy.*, 42(2017), 30, pp. 19446-19457
- [7] Cai, M.H., Tang, L., et al., Simulation of biomass gasification by Plasma based on ASPEN PLUS, *Journal of Guangxi University (Natural Science Edition).*, 41(2016), 03, pp. 863-869
- [8] Arena, U., Process and technological aspects of municipal solid waste gasification. A review, *Waste Management.*, 32(2012), 4, pp. 625-639
- [9] Cao, X.L., Chen, J.X., et al., Simulation of Waste plasma gasification based on ASPEN PLUS, *Industrial Furnace.*, 36(2014), 02, pp. 1-5
- [10] Wang, X., Zhang, C.F., et al., Research progress of plasma gasification technology of MSW, *Modern Chemical Industry.*, 32(2012), 12, pp. 20-24
- [11] Luca, M., Isam, J., et al., Modeling of plasma and entrained flow co-gasification of MSW and petroleum sludge, *Energy.*, 196(2020), 117001, pp. 1-12
- [12] Rosha, P., Kumar, S., et al., Sensitivity analysis of biomass pyrolysis for renewable fuel production using Aspen Plus, *Energy.*, 247(2022), 123545, pp. 1-7
- [13] Wan, L., Zu, Y.Z., et al., Experimental study on co-pyrolysis of high humidity sludge and biomass, *Journal of Nanjing University of Technology (Natural Science).*, 41(2019), 02, pp. 232-238
- [14] Zhou, J.J., An, J.B., Simulation analysis of biomass gasification process based on ASPEN PLUS, *Technology and Market.*, 18(2011), 08, pp. 10-11
- [15] Tungalag A, Lee B, Yadav M, et al. Yield prediction of MSW gasification including minor species through ASPEN plus simulation, *Energy.*, 198(2020), 117296, pp. 1-12
- [16] Jin, Z.R., Hou, F., et al., Simulation of thermal plasma gasification of oily sludge based on Aspen Plus, *Modern Chemical Industry.*, 38(2018), 09, pp. 224-228
- [17] Xv, Z.F., Ma, T.C., The mechanism of coal gasification assisted by plasma was studied by emission spectroscopy, *Journal of Daqing Petroleum Institute.*, (2007), 02, pp. 68-71
- [18] Peters, J.F., Banks, S.W., et al., A kinetic reaction model for biomass pyrolysis processes in Aspen Plus, *Applied Energy.*, 188(2017), pp. 595-603
- [19] Du, C.M., Wu, J., et al., Analysis on key technologies of hydrogen production from organic waste by plasma thermal decomposition gasification, *Chinese Environmental Science.*, 36(2016), 11, pp. 3429-3440
- [20] Xv, J., Study on CO transformation Process simulation by Aspen Plus software, *Chemical industry and engineering technology.*, 35(2014), 01, pp. 6-10

Submitted: 04.08.2022

Revised: 13.12.2022

Accepted: 30.12.2022