

ENGINE PERFORMANCE AND EMISSION CHARACTERISTICS OF MICROWAVE-PRODUCED BIODIESEL BLENDS

Fakher HAMDI¹, Ilhem YAHYA¹, Mehrez GASSOUMI¹, Aliya FAZAL², Ridha ENNETTA^{1*}, Hakan Serhad SOYHAN³

^{*1} Mechanical Modelling, Energy and Materials, National School of Engineers, Gabes University, Zrig, 6029, Gabes, Tunisia

² Department of Chemistry, Fatima Jinnah Women University, Rawalpindi, 46000, Pakistan

³ Engineering Faculty, Mechanical Engineering Department, Sakarya University, Sakarya, 54187, Turkey

* Corresponding author; E-mail: ridha.ennetta@issig.rnu.tn

The main objective of this research is to investigate, experimentally, the effects of biodiesel blends on the performance and emissions of a diesel engine. Measurements were carried out on a single-cylinder, four-stroke, and air-cooled compression-ignition engine, under half and full load conditions. Engine speed was varied from 1000 to 3000 rpm. Biodiesel was produced by transesterification process of sunflower oil with ethanol, using microwave-assisted heating reactor. Three biodiesel-diesel mixtures: containing 5%, 10% and 20% by volume of biodiesel, respectively, have been tested and compared to pure diesel fuel. The effects of these biodiesel blends on the engine operating characteristics such as brake specific fuel consumption, brake power, brake thermal efficiency, brake mean effective pressure and on carbon monoxide, carbon dioxide and nitrogen oxides emissions, have been investigated.

It was noticed that, at full load, the specific fuel consumptions of biodiesel blends were higher compared to the pure diesel fuel, but no change was observed under ½ load. An improvement in the brake thermal efficiency, under ½ load, was obtained, but at full load, for medium and high-speed, the thermal efficiencies of all biodiesel blends showed a decrease compared to pure diesel fuel. Concerning pollutants emissions, a decrease in carbon monoxide emissions of all biodiesel blends was noticed. The best result in carbon monoxide emissions was achieved by the mixture containing 10% by volume of biodiesel with an average reduction value close to 40%. In addition, a significant reduction in nitrogen oxides emissions was observed for the three biodiesel blends.

Keywords: Microwave, Biodiesel, Blends, Diesel engine, Performance, Emissions.

1. Introduction

Nowadays, the internal combustion engines (ICE) are facing many challenges, mainly related to fossil fuels. Indeed, the rely on fossil fuels is declining due to their environmental issues, depletion and price fluctuations. This situation pushes governments to tighten standards that are increasingly

restrictive, with the objective to switch to more green and sustainable energy resources. The last historic decision of the European Parliament (EP) [1] to adopt a regulation proposal for banning ICEs new sales starting from 2035, is forcing the scientific community and engineers to rethink the fate of ICE. Obviously, the EP decision will promote the use of battery electric vehicles (BEV) instead of internal combustion engine vehicles (ICEV).

Despite of a booming development, especially in light-duty application [2], BEVs are not able to compete with ICEVs, at least in the near future, and this is for several reasons such as the undeveloped charging infrastructures worldwide, the electricity origin which still relies on fossil fuels, the unresolved technical issues of batteries in terms of autonomy, manufacturing materials supply, sensitivity of their performance to environmental condition variations, etc. [3]. Compression ignition (CI) engine are considered as the keystone of the global economy throughout the maritime, railway and heavy-duty transportations. However, they are viewed as the principal source of air pollution causing irrevocable damages to nature and humans [4]. Many scientists assume that the problems of ICEs are not due to the engine itself but mainly to the hydrocarbons used to feed the engine [5]. Focusing on alternative fuels, with low CO₂ emissions, could be the best answer to fix the fossil fuels problems, especially during this transitional period. These alternatives can, initially, substitute partially fossil fuels, and then entirely replace them.

Biodiesel (BD) obtained from renewable oleic vegetable sources are the most promising substitute to hydrocarbon diesel fuel [6, 7]. Over the past few years (two decades), BD production and application have been comprehensively studied by many researchers. [8-12]. These researches aimed either to develop new solutions to improve BD production processes, or to assess their effects on the performance of combustion systems, experimentally and numerically [13]. The scientific literature on BD application in ICE is very extensive. Nevertheless, in the following, we will review recent publications, mostly from the last three years, that have addressed the effects of BD blending on diesel engines performance and emissions characteristics.

Accordingly, Emma et al. [14] conducted a research on the transesterification of coffee husk oil, which leads to coffee husk oil methyl ester, that have been mixed with pure diesel fuel and used to power a diesel engine under different loads. Their experimental results showed that the brake thermal efficiency (BTE) of the mixtures, B10, B20, B30 and B50 suffered a slight drop which did not exceed 3%, compared to pure diesel. Exhaust gas emissions are reduced for all biodiesel blends. At full load, a reduction in CO, HC, and smoke opacity was reported for B30, by a percentage of 13.2%, 4%, and 12%, respectively. On the other hand, CO₂ and NO_x emissions increased for B30 by 8.63% and 3.8%, respectively.

Tayari et al. [15] used microalgae to produce BD, which was mixed with pure diesel fuel for two percentages (10% and 20%). Their engine tests revealed that the use of BD resulted in a slight increase in break specific fuel consumption (BSFC) and a slight decrease in engine power (BP) and torque (BT). This behavior was accompanied by a significant decrease in CO and HC emissions and a modest reduction in CO₂ emissions, while there was a slight increase in NO_x emissions.

In another study, Jagtap et al. [16] investigated the blending effect of 4%, 10% and 20% of esterified jatropha biodiesel with pure diesel fuel. Experimental results showed an increase in BSFC, with increasing the BD blends. This was explained by the low calorific value and slightly higher density of BD blends compared to pure diesel fuel. Therefore, the loss of energy will be compensated by better fuel consumption. In addition, a reduction of CO and HC emissions was obtained.

Sivakrishna et al. [17] conducted a study devoted to the evaluation of the performance and emissions of automotive diesel engines, affected by the use of palm biodiesel. They found that emissions of CO, HC and particles have decreased considerably with the increase of the BD blends.

The reduction in particulate emissions was very clear at 10% blend (B10), while the sharp reduction in HC emissions started at 20% blend (B20). Palm oil biodiesel blends generated more torque and power than petro-diesel. They explained these results by the highest value of cetane number and the lower viscosity of biodiesel used than that of petro diesel.

A different experimental study, on sunflower oil methyl ester, was conducted by Temizera et al. [18]. This work aimed to analyze and study the combustion characteristics such as the in-cylinder pressure and the heat release rates. The engine, fueled with 10%, 20% and 30% of biodiesel, operated at 2000 rpm under full load.

Yesilyurt et al. [19] investigated two types of fuels, binary blend of diesel–sunflower oil biodiesel and ternary blends of diesel–biodiesel–pentanol. For the two fuels, the maximum BTE underwent an increase until medium load then a decrease for high loads and this was explained by the fact that the larger quantity of fuel injected at the higher engine load led to accumulate fuel in the cylinder and the possibility of incomplete combustion. Moreover, B20 gave a decrease in CO and HC compared to pure diesel under all loads, this decrease becomes more important as the percentage of pentanol increase. Totally opposite behavior was noticed for CO₂ emissions, thanks to the more complete combustion due to the excess of oxygen content.

Venkatesana, & Nallusamyb [20] conducted in-depth experimental work on the performance, combustion and emission characteristics of an agricultural tractor engine using the combination of methyl esters of soapnut oil and pine oil at different proportions. Their results showed that SFC of all biodiesel blends was higher than pure diesel at low load, and an enhancement was observed in fuel economy beyond 50% load. This reduction reached 18%, at full load condition, comparatively to pure diesel fuel. Also, an increase in BTE, varying from 8% to 13%, was observed for three BD blends. Concerning emissions, it has been shown that the majority of bi-mixtures have smoke emission less than pure diesel up to 75% load and almost the same as that of pure diesel at full load. They also noticed a significant reduction of unburnt hydrocarbon (UHC) emission for two biodiesel blends at full load. However, an increase in NO_x emission for all BD blends, under different loads, was obtained.

Tomić et al. [21] have carried out an experimental research on a tractor engine using a blend of pure diesel and 40% of biodiesel produced by transesterification of sunflower oil. Their work showed a bit decrease of maximum engine power with the B40, compared to pure diesel fuel, under low load and this difference become more evident and reached 3.21% at medium load. On the other hand, SFC of the BD blend was higher, at low load, but the difference between the two fuels consumption decreased with the increase of load. At high load, about 6.54% less CO was emitted using B40 fuel compared to pure diesel fuel. But at low load and speed CO emissions were similar for both fuels. A rising by 3.2% of CO₂ concentration, and by 2.4% of NO_x concentration with biodiesel compared to pure diesel was observed at high load which is related to a higher fuel consumption or more complete combustion.

Results from biodiesel research studies vary widely, however common conclusions can be drawn. CI engines fueled with biodiesel show slight decrease in mechanical operating characteristics and emit more NO_x emission, comparatively to ordinary diesel engines [22]. To overcome the drawbacks of biodiesel, there are several solutions such as the addition of metal oxides nanoparticles [23-26] the injection of gaseous fuels (natural gas, hydrogen, etc.) [27, 28] or the addition of oxygenated fuels, mainly alcohols, which is gaining more and more attention [29-34]. The last solution is the subject of the present research work. Indeed, the main objective of this research is to experimentally study the effect of adding a small amount of alcohol (ethanol) on the mechanical operating characteristics and pollutant emissions of an engine powered by a mixture of diesel and BD fuels. To achieve this objective, the work was divided into three stages. First, the effect of adding

ethanol to pure diesel fuel have been previously studied [35]. The current step is to evaluate the blending effect of biodiesel on the diesel engine. The last step aims to study the addition of ethanol on BD-diesel fuel blends.

The positive impacts, in terms of fuel consumption reduction and pollutants emissions mitigation, are highly affected by the biodiesel properties, which strongly depend on its production process. Microwave-assisted transesterification is one of the new methods to produce high quality biodiesel. As a chemical process for biodiesel production, this technique has been widely studied [36]. However, in the scientific literature, only few studies have addressed the effects of biodiesel obtained by microwave-assisted technique on engines performance and emissions [37]. Therefore, the aim of this study is to evaluate the impacts of using microwave-produced biodiesel on the performance and emissions characteristics of a diesel engine. Three BD-diesel mixtures (B5, B10 and B20) have been investigated comparatively to pure diesel fuel (B0). The effects of these BD blends on the engine operating characteristics such as SFC, BP and BTE and on CO, CO₂ and NO_x emissions have been carried out using a one-cylinder diesel engine.

2. Materials and Methods

2.1. Biodiesel production and fuels preparation

Biodiesel was produced by microwave-assisted transesterification process of commercial sunflower oil (SFO) using ethanol and NaOH as a catalyst. Microwave heating was used in the transesterification process to overcome the minimum mass transition of the two immiscible reactants, oil and alcohol. By improving the mixing phase at lower temperature, lower amounts of alcohol and catalysts are needed [38]. Microwave-assisted transesterification increases the biodiesel production yields and reduces the energy consumption by reducing the reaction time compared to traditional methods [39] .

Fig. 1 presents the microwave reactor used for the BD production transesterification process. The experimental setup consists of a modified microwave oven with a built-in stirring, raw materials supply and temperature measurement systems. [40]

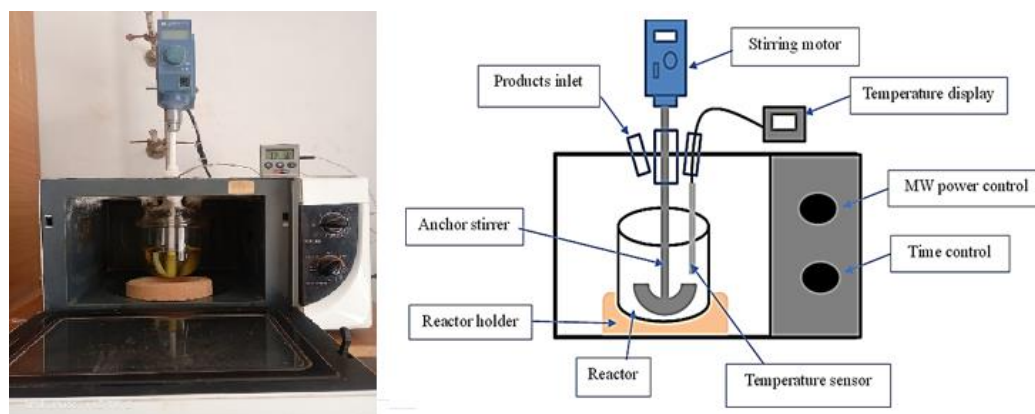


Figure 1. Microwave-assisted biodiesel production reactor

Fig. 2 illustrates the different steps of the biodiesel production. Yahya [40] optimized this process and a yield of 98.4 % has been obtained in just 85 seconds using an oil-to-alcohol molar ratio of 1:6, a 2% (by oil mass) as the catalyst amount and a reaction temperature of 70 °C.

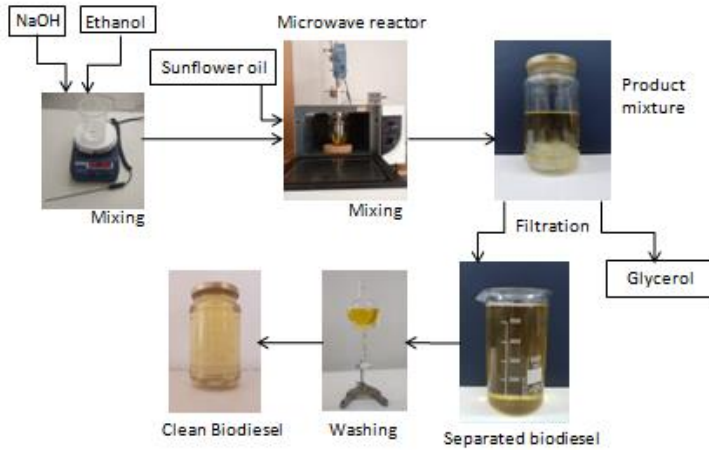


Figure 2. Biodiesel production steps

Tab. 1 gives the main properties of neat biodiesel and diesel fuel.

Table 1. Fuel properties

Properties	SFO BD (B100) [40]	Diesel fuel (B0) [41]
Density (kg/m ³) @ 15 °C	882.9	853.36
Kinematic Viscosity (mm ² /s) @ 40 °C	4.5	3.55
Lower Heating Value (MJ/kg)	37.70	42.67
Cetane number (CN)	53.76	49

The LHV and CN of BD were calculated using prediction models selected based on a comprehensive critical review of Bukkarapu and Krishnasamy [42]. They stated that the following models based on the BD density (ρ) gives good results:

$$\text{LHV} = -0.167 \rho + 184.95 \text{ [41]}$$

$$\text{CN} = 538.7 - 0.55 \rho \text{ [43]}$$

The obtained biodiesel was mixed with pure diesel fuel at three different blends 5%, 10% and 20% by volume and then compared to pure diesel fuel (B0). Exceeding 20% the atomization of biodiesel becomes more difficult because of its high viscosity and density [44].

2.2. Engine performance measurement setup

Fig. 3 presents the experimental setup diagram. It consists of a LOMBARDINI type, single-cylinder, four-stroke air-cooled diesel engine. The engine characteristics are presented in tab. 2. This engine is coupled to a swinging field DC dynamometer which is used, initially, to start the engine, then as an electric generator which converts mechanical energy into electric energy. This energy is then dissipated in an external variable rheostat which converts electricity into heat.

Table 2. Engine characteristics

Type	Lombardini 6LD325N
Cylinder	1
Stroke	4
Displacement (cc)	325
Compression ratio	18:1
Power (kW)	5
Maximum Torque (Nm)@ (rpm)	14 @ 2100
Maximum speed (rpm)	3500

The engine loading operation is realized by varying the electric resistance of the rheostat, this allowing the creation of a braking torque in the dynamometer shaft. The mechanical engine torque was measured directly by means of a graduation in the dynamometer outer case that tends to rotate due to the magnetic drag. The engine rotation speed is determined by an optical tachometer type VT-8204. A Pitot tube anemometer model VPT-100 is used to measure the intake air flow and temperature. The fuel consumption is measured by a graduated burette connected to a fuel tank supply. Quantitative exhaust gas composition (CO, CO₂, and NO_x) are determined by a Testo 350 gas analyzer. Measurements were carried out at the speed range {800-3200 rpm} under 1/2 load and full load. Before taking measurements, the engine was running at the idle speed and under no load for at least 15 minutes to reach its stabilization state. For each test, all measurements are repeated three times then

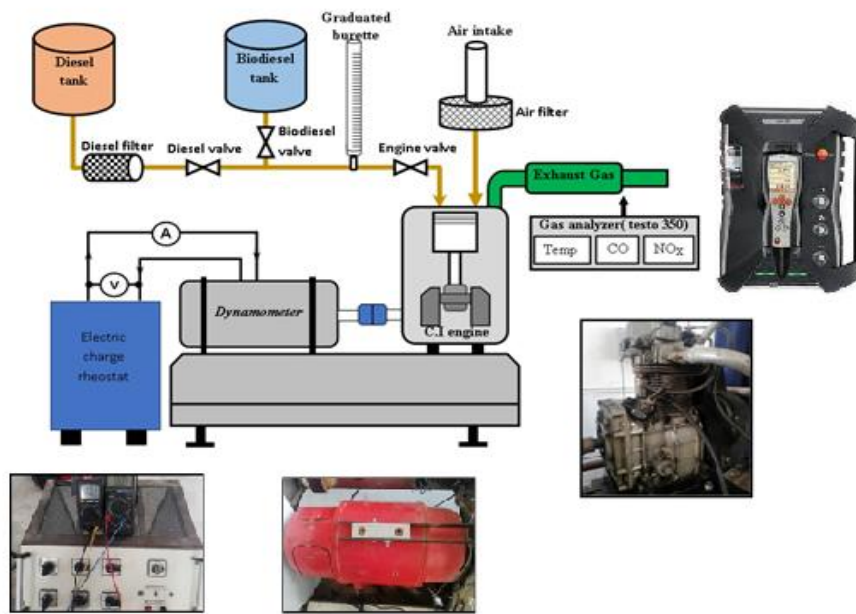


Figure 3. Experimental setup

the average value is calculated.

3. Uncertainties analysis

Based on the instrument's specifications (tab. 3), the standard deviation method was used to analyze the uncertainty and to evaluate the reliability of the measurements.

Table 3. Uncertainties of measurement instruments

Instrument	Uncertainty
Speed sensor	± 0.3
Fuel measuring	± 1.0
Dynamometer	± 1.0
CO sensor	± 3.4
CO ₂ sensor	± 0.34
NO _x sensor	± 0.1

According to Holman [45], the overall uncertainty is calculated using the formula :

$$\left[\sum_{i=1}^n (U_{x_i})^2 \right]^{1/2} \quad (1)$$

Where U_{x_i} is the uncertainty associated with each measured value using the corresponding instrument given in tab. 3.

Overall uncertainty (%) = square root of $[(0.3)^2 + (1.0)^2 + (1.0)^2 + (3.4)^2 + (0.34)^2 + (0.1)^2]$

The overall percentage of uncertainty is 3.71 % which is acceptable for experimental work.

4. Results and Discussion

The effects of biodiesel blends (B5, B10 and B20) on the CI engine operation and emissions characteristics were carried out under $\frac{1}{2}$ and full loads. In the following sections, we will present and discuss the obtained results of SFC, BP and BTE under each load. In addition, emissions of CO, CO₂ and NO_x will be presented.

4.1. Engine Performance

4.1.1 Specific fuel consumption (SFC)

Fig. 4 shows the variation of specific fuel consumption (SFC), for pure diesel B0 and for all biodiesel blends B5, B10 and B20 under $\frac{1}{2}$ load (a) and full load (b).

At low engine speed, high SFC is observed due to the low combustion efficiency caused by the walls heat losses. The same phenomena is observed at high engine speeds, but in this case, the combustion efficiency reduction is induced by the friction heat losses.

Under both loads, SFC increases with increasing BD blends for all the speed range. When the engine is running under $\frac{1}{2}$ load, SFC increases with increasing the percentage of biodiesel for all the speed range, but it remains weaker than that of pure diesel for a speed below 2000 rpm and become almost equal for B0, B5 and B10 when the speed increases further. Except for B20, starting from 2000 rpm, SFC exceeds that of B0 with an average of 13%. At full load, an overall reduction ranging from 10% to 35% in SFC was observed for all fuel mixtures comparatively to $\frac{1}{2}$ load. By comparison to pure diesel B0, one can notice that at low speed, the SFC of BD blends are lower than B0. However, at medium and high speeds (> 1600 rpm), the engine behavior, in terms of SFC, is different for $\frac{1}{2}$ load from that for full load. Indeed, under $\frac{1}{2}$ load, the SFC of B0 is comparable to that of B5 and B10 but, under full load, the SFC of B0 is lower than that of BD blends. For example, under full load, the BD blends SFC increase is about 22%, comparatively to B0. At 2400 rpm it reaches about 40%. This is due to the lower LHV and greater density of biodiesel as explained by Yasar and Altun [46]. Similar results were obtained by Carraretto et al. [47], Oyedepo et al. [48], Sharon et al.[49] and recently by Jagtap et al. [16].

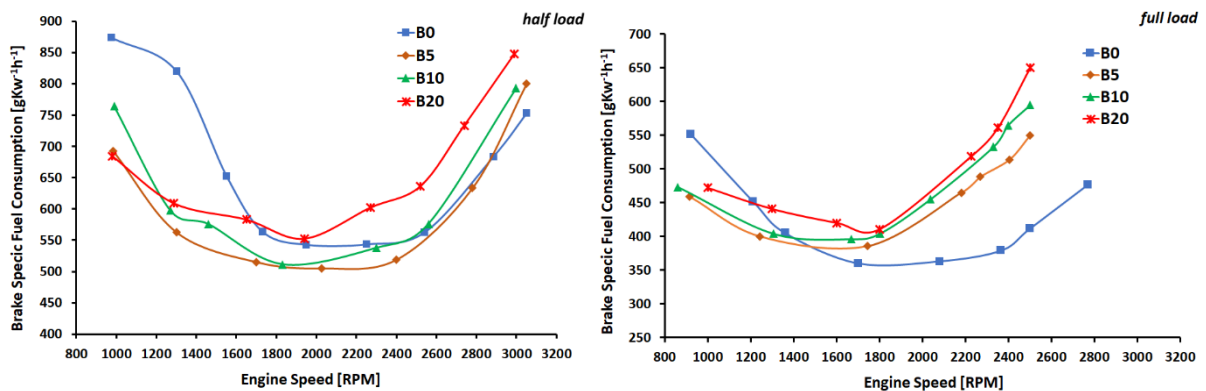


Figure 3. Effect of biodiesel blending on specific fuel consumption under half and full loads

4.1.2 Brake power (BP)

In general, most biodiesel are characterized by higher oxygen content, viscosity, lubricity and lower heating value compared to pure diesel fuel. According to Allami et al. [37], the engine power is directly related to the fuel heating value and inversely proportional to its viscosity and lubricity. Fig. 5

shows clearly that adding biodiesel to pure diesel slightly increases the engine power output, this difference becomes somewhat clear and in the order of 4% at high speed and under $\frac{1}{2}$ load. A same behavior was found by Allami et al. [50] and Jagtap et al. [16]. The authors attributed this increase to the high oxygen content and flammability of biodiesel.

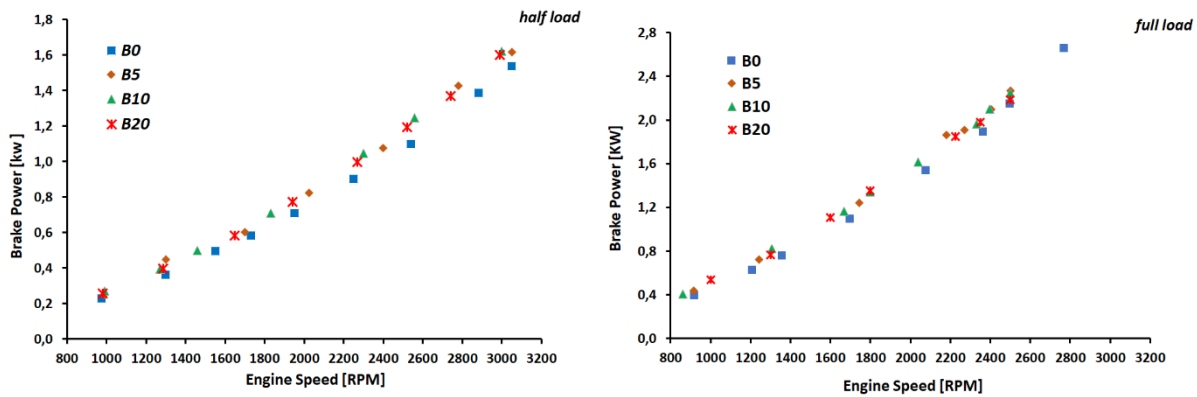


Figure 4. Effect of biodiesel blending on brake power under half and full loads

Contrary results have been found by Oyedepo et al. [48] giving a slight decrease in the power delivery by biodiesel and it has been attributed to the lower cetane number of the tested biodiesel which increases the fuel ignition delay, thereby reducing the engine power. Also, Boubahri et al. [10] when investigated waste cooking oil (WCO) biodiesel blends, they observed a 5% decrease in engine power and torque for each 10% of BD blend added, comparatively to neat diesel fuel.

As stated by Ennetta et al. [51], the performances of the engine are affected by the quality of the fuel which changes strongly depending on the process and the raw materials used for its production.

At $\frac{1}{2}$ load and for all engine speeds, B10 gives the best results in terms of BP compared to other mixtures. Under full load conditions, comparable results are given by B10 and B20 at low and medium speeds. But at high speed, B5 gives the best results. This behavior can be attributed to the dual competition between BD's high cetane number and oxygen content, on the one hand, and its low LHV and high viscosity, on the other hand.

4.1.3 Brake thermal efficiency (BTE)

Brake thermal efficiency (BTE) is the ratio between the mechanical power delivered by the engine crankshaft output and the amount of energy generated by the fuels during the combustion process. Many factors affect the engine BTE such as the fuel properties, the air-fuel ratio, the engine compression ratio and the combustion process [19], [52].

Fig. 6 presents the effect of biodiesel blends on BTE for various engine speeds under $\frac{1}{2}$ and full loads. As expected, the BTE results are the inverse image of those of the SFC since BTE is inversely proportional to the SFC.

A higher engine speed increases friction losses and combustion frequency, lowering the generated torque and tending to decrease engine efficiency [53].

These results show that BTE is improved with increasing engine load for all tested fuels. The reason behind this may be the higher in-cylinder temperature, which increases with increasing injected fuel quantity. One more probable reason is that at high loads, increasing injected fuel quantity leads to greater charge cooling, resulting in slightly higher volumetric efficiency [54].

Regardless of load, the engine BTE decreases with increasing BD blends which can be attributed to the low LHV and high viscosity of BD blends. Under $\frac{1}{2}$ load conditions, the maximum values of BTE for the three BD blends B5, B10 and B20 are ranging from 16,7% to 15,6% and are

obtained at the vicinity of 1900 rpm. For the full load case, the maximum BTE values, ranging from 22% to 20.5% are obtained at a lower speed of 1600 rpm. Considering the pure diesel fuel B0, its maximum BTE, under $\frac{1}{2}$ load, is similar to that of B20 but under full load conditions B0 gives the highest BTE value among all tested mixtures, 23.5% at the vicinity of 1800 rpm.

Referring to the Fig. 6, it is clear that, under $\frac{1}{2}$ load, BD blends have better thermal efficiency than that of pure diesel fuel. This can be attributed to the high cetane number and oxygen content of the biodiesel fuels which help improving the combustion process compared with pure diesel fuel [55]. Similar results were also shown by Raheman and Phadataré [56]. As for $\frac{1}{2}$ load, a same result is obtained under full load at low engine speed (<1400 rpm). However, at medium and high speeds (>1600 rpm), the pure diesel fuel gives the best BTE values followed by B5, B10 and B20. This behavior is mainly due to the low LHV and high viscosity of BD blends which play the major role in reducing the fuel mixing process and combustion efficiencies, at elevated engine speeds.

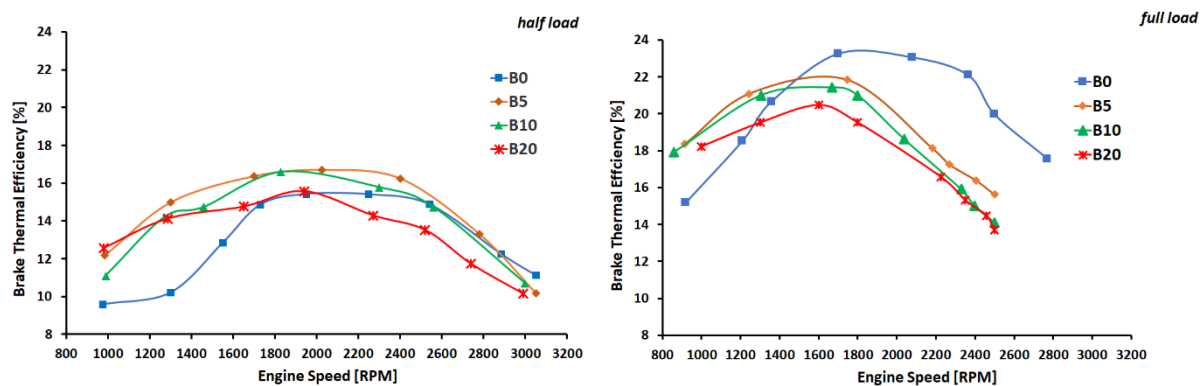


Figure 5. Effect of biodiesel blending on brake thermal efficiency under half and full loads

Several experimental results have been reported by Masimalai and Subramaniyan [57]. Considering the scientific literature, data is very contradictory: some researchers reported that biodiesel has a higher BTE than pure diesel fuel which was explained by the improvement of the atomization process due to the reduction in the viscosity of the fuel [6], [21]. Other authors assert the opposite behavior which was explained by the fact that the addition of biodiesel creates a reduction in cetane number or in LHV of the mixture, that hinders the combustion process [58, 59]. These contradictory behaviors are mainly related to the quality and the origin of the biodiesel.

4.2. Engine Emissions

In the following sections, the engine exhaust gases emissions will be presented and discussed for all tested fuel blends. Measurements have been performed under full load conditions and for various engine speeds.

4.2.1 Carbon monoxide (CO) emissions

The most influencing factor on the increase of CO production is the lack of oxygen in the combustion chamber which leads to an incomplete combustion reaction [49]. Other studies have stated that the high cetane number of BD blends reduces the possibility of carbon monoxide formation [60], [61].

The variation of the CO emissions of the diesel engine, at full load, using four different test fuels, B0, B5, B10 and B20 is presented in fig. 7. It is clear that CO emissions increase with increasing engine speed. Gassoumi et al. [62] attributed this increase to the problem of air-fuel mixture preparation at high engine speed due to the high air velocity. Besides, at high engine speeds, the air

density decreases, reducing its mass flow and making the air-fuel mixture richer. Consequently, more CO is produced.

Comparatively to pure diesel fuel, it is clear that the addition of biodiesel reduces the amount of CO generated during combustion. The best results giving a stable reduction in CO emission, even at high speed, were obtained using B10 with an overall reduction percentage exceeding 40%. B10 is followed by B5 whose reduction was very significant at low and medium speeds but did not exceed 4% at high speed. B20 behavior was fluctuating with a reduction in CO at some speeds and an increase in others. Similar results was obtained by Elsanusi et al. [63] and Jafarihaghighi et al. [64]. Bibin et al.[65] attributed the decrease in CO emission with the increase of biodiesel blends, to the presence of oxygen which improves the complete oxidation of CO.

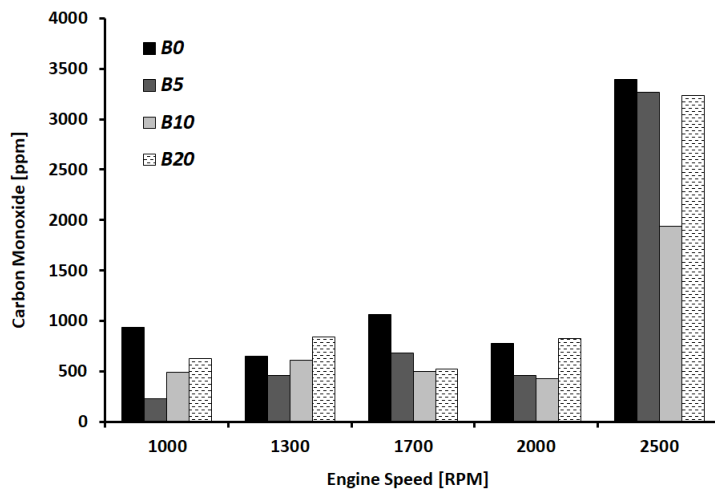


Figure 6. Carbon monoxide emissions versus engine speed, under full load

4.2.2 Carbon dioxide (CO_2) emissions

According to Vergel-Ortega et al. [66], carbon dioxide emissions depends on the values of carbon to hydrogen atoms ratio (C/H), and on the oxygen content. Fig. 8 shows the variation of CO_2 emissions function of the engine speed for the different fuel blends. CO_2 emissions increase with increasing engine speed for all tested fuels, and this is probably due to the rich mixture in combustion chamber at high speeds. The overall mean reductions in CO_2 emissions, comparatively to pure diesel fuel, for B5, B10 and B20 blends are 46.6%, 50% and 46.8%, respectively. Yesilyurt and Aydin [67] and Swaminathan and Sarangan [68] reported similar results using cottonseed oil and fish oil biodiesels, respectively. They also claimed that this reduction is due to the lower carbon content in BD blends leading to a lower C/H ratio comparatively to pure diesel fuel.

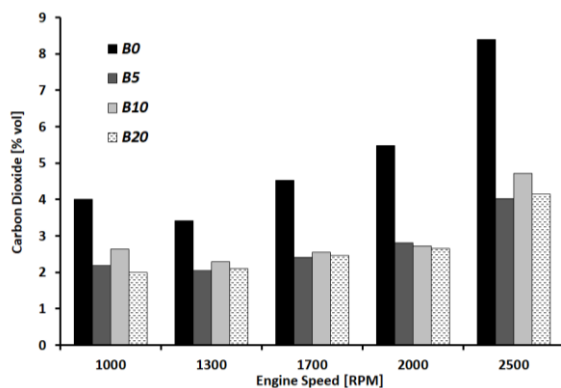


Figure 7. Carbon dioxide emissions versus engine seed, under full load

4.2.3 Nitrogen oxides (NO_x) emissions

Nitrogen oxides are considered as one of the main pollutants of diesel engine. The major reasons for NO_x formation are the high combustion temperature, the residence time of chemical reactions, and the excess amount of oxygen available for the oxidation process.

NO_x emitted by the engine, under full load conditions, for pure diesel and biodiesel blends are presented in fig. 9 at engine speed ranging from 1000 to 2500 rpm. One can note that increasing the engine speed, NO_x emissions increase significantly regardless of fuel type which is due to the increase in the combustion chamber temperature as explained by Yasar and Altun [46]. This phenomenon is accentuated by the increase in friction at high speeds.

Fig. 9 shows that for all speeds range, addition of biodiesel reduces NO_x emissions compared to B0 by 50%, 35% and 64% for B5, B10 and B20, respectively. This behavior is probably due to the reduction in combustion temperature created by the addition of biodiesel. Another factor is that, initially, biodiesel blends may contain lower amount of nitrogen than pure diesel fuel. This fact has been confirmed by Wei et al. [69]. They reported that diesel fuel contains 90 ppm of Nitrogen while waste cooking oil biodiesel contains only 5 ppm of Nitrogen. Kalligeros et al. [70] also reported a reduction in NO_x emissions when investigating the effects of sunflower oil and olive oil biodiesels on the performance of a stationary diesel engine.

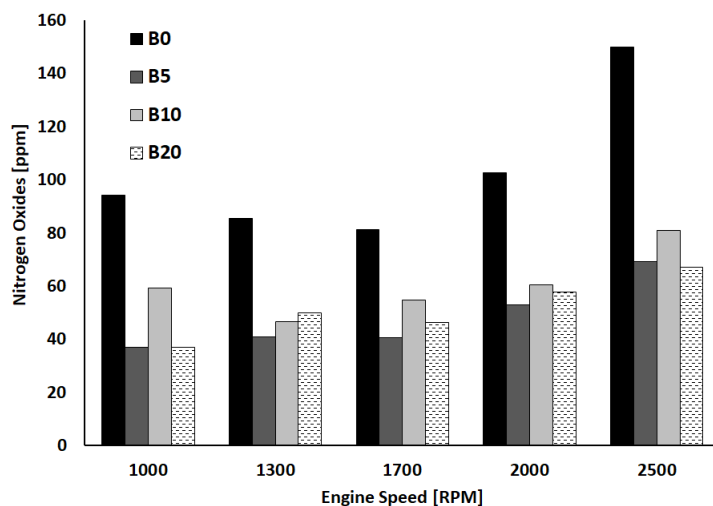


Figure 8. Nitrogen oxides emissions versus engine speed, under full load

5. Conclusion

The present experimental research study was carried out on a single-cylinder diesel engine in order to assess the blending effects on the engine performance of biodiesel obtained from a microwave-assisted transesterification process of sunflower oil. Measurements were performed under ½ load and full load conditions and an engine speed varying from 1000 to 3000 rpm.

Three Biodiesel blends, B5, B10 and B20, were evaluated comparatively to pure diesel fuel B0. The effects of these BD blends on the engine performance such as SFC, BP and BTE and exhausted gas emissions such as CO, CO₂ and NO_x were investigated. The most important results are summarized as following:

- At full load, SFC of BD blends were higher and showed an increase of 32% at 2400 rpm compared to B0. SFC of all BD blends became almost equal when the engine speed exceeds 2000 rpm under ½ load. However, adding biodiesel to pure diesel did not affect the engine power output.

- An improvement of BTE was observed for all blends at ½ load. Nevertheless, under full load, especially at medium and high speeds, BD blends showed a decrease of SFC compared to B0.
- A decrease in all BDs CO emissions was noticed. The best result in CO emission was performed by B10 with a decrease mean value of 40% compared to B0.
- Due to the lower carbon content in BD blends, CO₂ emissions were significantly decreased.
- At all speeds range, addition of biodiesel reduced NO_x emissions compared to B0 by about 50%, 35% and 64% for B5, B10 and B20, respectively. This drop is mainly due to the decrease in combustion temperature by adding biodiesel.
- Biodiesel produced by microwave-assisted transesterification and directly mixed with pure diesel fuel exhibits high performance. However, it is crucial to emphasize the need for careful consideration of the long-term storage effects on the mixture's properties, including miscibility and solubility to ensure that engine performance is maintained over time.

Nomenclature

B:	Blend [%]
BD:	Biodiesel
BSFC:	Brake Specific Fuel Consumption [g/kWh]
BTE:	Brake Thermal Efficiency [-]
BP:	Brake Power [kW]
CI:	Compression-Ignition [-]
CN:	Cetane number [-]
CO:	Carbon monoxide [ppm]
CO ₂ :	Carbon dioxide [% vol.]
D:	Diesel
ICE:	Internal Combustion Engine
LHV:	Lower Heating Value [MJ/kg]
MW:	Microwave
NO _x :	Nitrogen oxides [ppm]

References

- [1] ***, European Parliament, <https://www.europarl.europa.eu>.
- [2] ***, International Energy Agency (IEA), Global EV Outlook 2021, <https://www.iea.org>,
- [3] Kalghatgi, G., Scoping Net Zero, 2021, <https://www.thegwpf.org>.
- [4] ***, World Health Organization (WHO), <https://www.who.int>.
- [5] Senecal, P. K., Leach, R., *Racing toward zero: the untold story of driven green*, SAE Book, 2021.
- [6] Khan, M. A. H., *et al.*, Investigation of biofuel as a potential renewable energy source, *Atmosphere*, 2 (2021), 10, pp.1289 , doi.org/10.3390/atmos12101289
- [7] Jeswani, H. K., *et al.*, Environmental sustainability of biofuels: a review, *Proc. R. Soc. A.*, 476 (2020) pp. 20200351, doi.org/10.1098/rspa.2020.0351
- [8] Guo, S., *et al.*, Effect of adding biodiesel to diesel on the physical and chemical properties and engine performance of fuel blends, *J. Biobased Mater. Bioenergy*, 10 (2016), 1, pp. 34–43, doi:10.1166/jbmb.2016.1566
- [9] Che Mat, S., *et al.*, Performance and emissions of straight vegetable oils and its blends as a fuel in diesel engine: A review, *Renew. Sustain. Energy Rev.*, 82 (2018), September 2017, pp. 808–823, doi:10.1016/j.rser.2017.09.080

- [10] Boubahri, C., et al., Experimental study of a diesel engine performance running on waste vegetable oil biodiesel blend, *J. Energy Resour. Technol.*, 134 (2012), 3, pp. 032202, doi:10.1115/1.4006655
- [11] Palani, Y., et al., Performance and emission characteristics of biodiesel-blend in diesel engine: A review, *Environ. Eng. Res.*, 27 (2022), 1, pp. 0–1, doi.org/10.4491/eer.2020.338
- [12] Singh Rajpoot, A. et al., Performance analysis of a CI engine powered by different generations of biodiesel; Palm oil, Jatropha, and microalgae, *Mater. Today Proc.*, (2023), doi.org/10.1016/j.matpr.2023.02.037
- [13] Salam, S., Verma, T. N., Appending empirical modelling to numerical solution for behaviour characterisation of microalgae biodiesel, *Energy Convers. Manag.*, 180 (2018), November, pp. 496–510, doi:10.1016/j.enconman.2018.11.014
- [14] Emma, A. F., et al., Extraction and characterization of coffee husk biodiesel and investigation of its effect on performance, combustion, and emission characteristics in a diesel engine, *Energy Convers. Manag.* X, 14 (2022), March, p. 100214, doi:10.1016/j.ecmx.2022.100214
- [15] Tayari, S., Abedi, R., Effect of Chlorella vulgaris methyl ester enriched with hydrogen on performance and emission characteristics of CI engine, *Fuel*, 256 (2019), March, p. 115906, doi: 10.1016/j.fuel.2019.115906
- [16] Jagtap, S. P., et al., Improving the usability of biodiesel blend in low heat rejection diesel engine through combustion, performance and emission analysis, *Renew. Energy*, 155 (2020), pp. 628–644, doi.org/10.1016/j.renene.2020.03.115
- [17] Sivakrishna, T., et al., The effect of palm biodiesel fuel on the performance of automotive four stroke diesel engine, *IOP Conf. Ser. Mater. Sci. Eng.*, 574 (2019), 1, pp. 1–13, doi:10.1088/1757-899X/574/1/012015
- [18] Temizer, İ., et al., Numerical and experimental investigation of the effect of biodiesel/diesel fuel on combustion characteristics in CI engine, *Fuel*, 270 (2020), January, pp. 117523, doi.org/10.1016/j.fuel.2020.117523
- [19] Yesilyurt, M. K., et al., The performance, emissions, and combustion characteristics of an unmodified diesel engine running on the ternary blends of pentanol/safflower oil biodiesel/diesel fuel, *J. Therm. Anal. Calorim.*, 140 (2020), 6, pp. 2903–2942, doi.org/10.1007/s10973-020-09376-6
- [20] Venkatesan, V., Nallusamy, N., Pine oil-soapnut oil methyl ester blends: A hybrid biofuel approach to completely eliminate the use of diesel in a twin cylinder off-road tractor diesel engine, *Fuel*, 262 (2020), October, p. 116500, doi.org/10.1016/j.fuel.2019.116500
- [21] Tomic, M., et al., Effects of biodiesel on changes in IC engine performances: A long-term experiment with farm tractors, *Fuel*, 292 (2021), November, pp. 120300, doi.org/10.1016/j.fuel.2021.120300
- [22] Ganesan S., et al., Performance and emission study on the effect of oxygenated additive in neat biodiesel fueled diesel engine, *Energy Sources, Part A Recover. Util. Environ. Eff.*, 41 (2019), 16, pp. 2017–2027, doi:10.1080/15567036.2018.1549148
- [23] Elsharkawy, E. A., et al., Enhancing the Impact of Biodiesel Blend on Combustion, Emissions, and Performance of DI Diesel Engine, *Arab. J. Sci. Eng.*, vol. 45 (2020), 2, pp. 1109–1123, doi:10.1007/s13369-019-04245-3
- [24] Tripathi, R., et al., Role of nanoparticles as an additive to the biodiesel for the performance and emission analysis of diesel engine - A review, *Mater. Today Proc.*, 46 (2021), pp. 11222–11225, doi:10.1016/j.matpr.2021.02.513
- [25] Singh Rajpoot, A., et al., Effect of graphene nanoparticles on the behavior of a CI engine fueled with Jatropha biodiesel, *Mater. Today Proc.*, (2023), doi.org/10.1016/j.matpr.2023.03.785

- [26] Singh Rajpoot, A., *et al.*, Comparison of the effect of CeO₂ and CuO₂ nanoparticles on performance and emission of a diesel engine fueled with Neochloris oleoabundans algae biodiesel, *Mater. Today Proc.*, (2023), doi.org/10.1016/j.matpr.2023.03.233
- [27] Nayyar, A., *et al.*, A comprehensive review of biodiesel and CNG as alternative fuels for compression ignition engine, *Int. J. Renew. Energy Technol.*, 9 (2018),1/2, p. 223, doi.org/10.1504/IJRET.2018.090119
- [28] Thiagarajan, S., *et al.*, Effect of hydrogen on compression-ignition (CI) engine fueled with vegetable oil/biodiesel from various feedstocks: A review, *Int. J. Hydrogen Energy*, (2022), doi.org/10.1016/j.ijhydene.2021.12.147
- [29] Kishore Pandian, A., *et al.*, Influence of an oxygenated additive on emission of an engine fueled with neat biodiesel, *Pet. Sci.*,14 (2017), 4, pp. 791–797, doi.org/10.1007/s12182-017-0186-x
- [30] Devarajan, Y., *et al.*, Performance, combustion and emission analysis of mustard oil biodiesel and octanol blends in diesel engine, *Heat Mass Transf. und Stoffuebertragung*, 54 (2018), 6, pp. 1803–1811, doi.org/10.1007/s00231-018-2274-x
- [31] Devarajan, Y., *et al.*, Experimental testing and evaluation of neat biodiesel and heptanol blends in diesel engine, *J. Test. Eval.*, 47 (2019), 2, pp. 987–997, doi: 10.1520/JTE20170307
- [32] Ruan, J., *et al.*, Effects of Injection Timing on Combustion Performance and Emissions in a Diesel Engine Burning Biodiesel Blended With Methanol, *Therm. Sci.*,25 (2021), 4 , pp. 2819–2829, doi: 10.2298/TSCI191211202R.
- [33] Jamrozik, A., Tutak, W., Effect of diesel-biodiesel-ethanol blend on combustion , performance , and emissions characteristics on a direct injection Diesel engine, *Therm. Sci.*, 21 (2017), 1, Part B, pp. 591-604, doi: 10.2298/TSCI160913275J.
- [34] Madiwale, S., *et al.*, Investigation of cottonseed oil biodiesel with ethanol as an additive on fuel properties, engine performance, combustion and emission characteristics of a diesel engine, *Therm. Sci.*, 24 (2020), 1, Part A pp. 27–36, doi: 10.2298/TSCI180604235M
- [35] Hamdi, F., *et al.*, Experimental Study of alcohol blending effects on the operating characteristics of a diesel engine, *Int. J. Automot. Sci. Technol.*, 6 (2022), 1, pp. 49-5, doi: 10.30939/ijastech.995847.
- [36] Yadav, N., *et al.*, Microwave-assisted biodiesel production using –SO₃H functionalized heterogeneous catalyst derived from a lignin-rich biomass, *Sci. Rep.*, 13 (2023), 1, pp. 9074., doi: 10.1038/s41598-023-36380-1.
- [37] Allami, H. A., *et al.*, Precise evaluation the effect of microwave irradiation on the properties of palm kernel oil biodiesel used in a diesel engine, *J. Clean. Prod.*, 241 (2019), pp. 117777, doi: 10.1016/j.jclepro.2019.117777.
- [38] Vignesh, P., *et al.*, A review of conventional and renewable biodiesel production, *Chinese J. Chem. Eng.*, 40 (2021) , pp. 1–17, doi: 10.1016/j.fuel.2020.117841.
- [39] Saengsawang, *et al.*, The optimization of oil extraction from macroalgae, *Rhizoclonium* sp. by chemical methods for efficient conversion into biodiesel, *Fuel*, 274 (2020), February, pp. 117841, doi:10.1016/j.fuel.2020.117841
- [40] Yahya, I., Microwave assisted biodiesel production and its application in CI engine, Ph. D. thesis, Gabes University, Gabes, Tunisia, 2021.
- [41] Tesfa, B., *et al.*, LHV predication models and LHV effect on the performance of CI engine running with biodiesel blends, *Energy Convers. Manag.*, 71 (2013), pp. 217–226, doi: 10.1016/j.enconman.2013.04.005.
- [42] Bukkarapu, K. R., Krishnasamy, A., A critical review on available models to predict engine fuel properties of biodiesel, *Renew. Sustain. Energy Rev.*, 155 (2022), p. 111925,

doi.org/10.1016/j.rser.2021.111925.

- [43] Giakoumis, E. G., A statistical investigation of biodiesel physical and chemical properties, and their correlation with the degree of unsaturation, *Renew. Energy*, 50 (2013), pp. 858–878, doi: 10.1016/j.renene.2012.07.040.
- [44] Zhang, Y., *et al.*, A Comprehensive Review of the Properties, Performance , Combustion , and Emissions of the Diesel Engine Fueled with Different Generations of Biodiesel, *Processes*, 10 (2022), pp. 1178,
- [45] Holman, J. P., *Experimental Methods for Engineers*. McGraw-Hill/Connect Learn Succeed, 2012.
- [46] Yasar, F., Altun, S., The effect of microalgae biodiesel on combustion, performance, and emission characteristics of a Diesel Power Generator, *Therm. Sci.*, 22 (2018), 3, pp. 1481–1492, doi: 10.2298/tsci180403156y.
- [47] Carraretto, C., *et al.*, Biodiesel as alternative fuel: Experimental analysis and energetic evaluations, *Energy*, 29 (2004) , 12-15 SPEC, pp. 2195–2211, doi: 10.1016/j.energy.2004.03.042.
- [48] Oyedepo, S.O., *et al.*, Experimental investigation of waste vegetable oil - Diesel fuel blends effects on performance of compression ignition engine, *Procedia Manuf.*, 35 (2019), pp. 1039–1046, doi: 10.1016/j.promfg.2019.06.054.
- [49] Sharon, H., *et al.*, Fueling a stationary direct injection diesel engine with diesel-used palm oil-butanol blends - An experimental study, *Energy Convers. Manag.*, 73 (2013), X, pp. 95–105, doi: 10.1016/j.enconman.2013.04.027.
- [50] Allami, H. A. R., Nayebzadeh, H., The assessment of the engine performance and emissions of a diesel engine fueled by biodiesel produced using different types of catalyst, *Fuel*, 305 (2021) , pp. 121525, doi: 10.1016/j.fuel.2021.121525.
- [51] Ennetta, R., *et al.*, Current Technologies and Future Trends for Biodiesel Production : A Review, *Arab. J. Sci. Eng.* 47 (2022), pp. 15133–15151, doi: 10.1007/s13369-022-07121-9.
- [52] Al-Iwayzy, S. H., Yusaf, T., Diesel engine performance and exhaust gas emissions using Microalgae *Chlorella protothecoides* biodiesel, *Renew. Energy*, 101 (2017), pp. 690–701, doi: 10.1016/j.renene.2016.09.035.
- [53] Thomaz, F., Baeta, J. G. C., Effects of Engine Speed on the Performance at Extreme Vehicle Driving Conditions, in 2019 SAE Brasil Congress & Exhibition, (2020), doi.org/10.4271/2019-36-0297.
- [54] Singh, A. P., *et al.*, Methanol/Ethanol/Butanol-Gasoline Blends Use in Transportation Engine—Part 1: Combustion, Emissions, and Performance Study, *J. Energy Resour. Technol.*, 144 (2022), 10, pp. 102304, doi: 10.1115/1.4053985.
- [55] Devarajan, Y., *et al.*, Emissions analysis on diesel engine fuelled with cashew nut shell biodiesel and pentanol blends, *Environ. Sci. Pollut. Res.*, 24 (2017), 14, pp. 13136–13141, doi: 10.1007/s11356-017-8915-7.
- [56] Raheman, H., Phadatare, A. G., Diesel engine emissions and performance from blends of karanja methyl ester and diesel, *Biomass Bioenergy*, 27 (2004), 4, pp. 393–397, doi: 10.1016/j.biombioe.2004.03.002.
- [57] Masimalai, S., Subramaniyan, A., A complete assessment on the impact of in-cylinder and external blending of eucalyptus oil on engine's behavior of a biofuel-based dual fuel engine, *Environ. Sci. Pollut. Res.*, 26 (2019), 8, pp. 7938–7953, doi: 10.1007/s11356-019-04285-0.
- [58] Das, M., *et al.*, An experimental study on the combustion, performance and emission characteristics of a diesel engine fuelled with diesel-castor oil biodiesel blends, *Renew. Energy*, 119 (2018), pp. 174–184, doi: 10.1016/j.renene.2017.12.014.
- [59] Gunasekaran, A., Gobalakichenin, D., Performance and combustion analysis of Mahua biodiesel

- on a single cylinder compression ignition engine using electronic fuel injection system, *Therm. Sci.*, 20 (2016), pp. S1045–S1052 doi: 10.2298/TSCI16S4045G.
- [60] Khoobbakht, *et al.*, Optimization of Chlamydomonas alga biodiesel percentage for reducing exhaust emission of diesel engine, *Process Saf. Environ. Prot.*, 152 (2021), pp. 25–36, doi: 10.1016/j.psep.2021.05.008.
- [61] Xue, J., *et al.*, Effect of biodiesel on engine performances and emissions, *Renew. Sustain. Energy Rev.*, 15 (2011), 2, pp.1098–1116, doi: 10.1016/j.rser.2010.11.016.
- [62] Gassoumi, M., *et al.*, Methanol as a fuel additive: effect on the performance and emissions of a gasoline engine, *Energy Sources, Part A Recover. Util. Environ. Eff.*, 45 (2023), 3, pp. 9485–9497, doi: 10.1080/15567036.2023.2240741.
- [63] Elsanusi, O. A., *et al.*, Experimental Investigation on a Diesel Engine Fueled by Diesel-Biodiesel Blends and their Emulsions at Various Engine Operating Conditions, *Appl. Energy*, 203 (2017), pp. 582–593, doi: 10.1016/j.apenergy.2017.06.052.
- [64] Jafarihaghighi, *et al.*, Comparing among second, third, and fourth generations (genetically modified) of biodiesel feedstocks from the perspective of engine, exhaust gasses and fatty acid: Comparative assessment, *Clean. Chem. Eng.*, 2 (2022), March, p. 100025, doi: 10.1016/j.clce.2022.100025.
- [65] Bibin, C., *et al.*, Performance, emission and combustion characteristics of a Di diesel engine using blends of punnai oil biodiesel and diesel as fuel, *Therm. Sci.*, 2018 (2018), pp. 13–25, doi: 10.2298/TSCI180325233B.
- [66] Vergel-Ortega, *et al.*, Experimental study of emissions in single-cylinder diesel engine operating with diesel-biodiesel blends of palm oil-sunflower oil and ethanol, *Case Stud. Therm. Eng.*, 26 (2021), p. 101190, doi: 10.1016/j.csite.2021.101190.
- [67] Yesilyurt, M. K., Aydin, M., Experimental investigation on the performance, combustion and exhaust emission characteristics of a compression-ignition engine fueled with cottonseed oil biodiesel/diethyl ether/diesel fuel blends, *Energy Convers. Manag.*, 205 (2020), doi: 10.1016/j.enconman.2019.112355.
- [68] Swaminathan, C., Sarangan, J., Performance and exhaust emission characteristics of a CI engine fueled with biodiesel (fish oil) with DEE as additive, *Biomass Bioenergy*, 39(2012), pp. 168–174, doi: 10.1016/j.biombioe.2012.01.001.
- [69] Wei, L., *et al.*, Combustion process and NO_x emissions of a marine auxiliary diesel engine fuelled with waste cooking oil biodiesel blends, *Energy*, 144 (2018), pp. 73–80, doi: 10.1016/j.energy.2017.12.012.
- [70] Kalligeros, S., *et al.*, An investigation of using biodiesel/marine diesel blends on the performance of a stationary diesel engine, *Biomass Bioenergy*, 24(2003), 2, pp.141–149, doi: 10.1016/S0961-9534(02)00092-2.

RECEIVED DATE: 3.6.2023.

DATE OF CORRECTED PAPER: 26.7.2023.

DATE OF ACCEPTED PAPER: 11.8.2023.