

EXPERIMENTAL STUDY ON SPRAY IMPINGEMENT
DURING DIESEL ENGINE STARTING

Chutao LAI^{1,#}, Xiaokai ZHOU^{2,#,*}, Yizhao HU³, Yitong GUO⁴, Kunyi LI⁵, Panjie WANG⁶

¹School of Information Science and Engineering, East China University of Science and Technology,
Shanghai 200237, China 1

^{*2}School of Mechanical and Electronic Control Engineering, Beijing Jiaotong University, Beijing
100044, China 2

³College of Environmental Science and Engineering, Donghua University, Shanghai 201620, China 3

⁴School of Automation, University of Science and Technology Beijing, Beijing 100083, China 4

⁵School of foreign languages, Beijing Keji University, Beijing 100083, China 5

⁶Vehicle Engineering College, HEBEI VOCATIONAL COLLEGE OF RAIL TRANSPORTATION,
Shijiazhuang 050011, China 6

[#]These authors contributed equally to this work and should be considered as co-first authors.

^{*}Corresponding author; E-mail: 21221093@bjtu.edu.cn

A lot of research has been carried out in the field of improving combustion efficiency and reducing exhaust gas, but the phenomenon of engine fuel spray hitting the wall cannot be solved well all the time, thus the phenomenon will increase exhaust gas emissions and reduce combustion efficiency. Based on oil pump test bench of diesel engine, we designed spray-wall impingement's test, did high speed camera shooting to capture the relevant motion characteristics of fuel spraying-hitting the wall by mosquito-rope method, under the starting process, the influence of different working condition on spray impingement was studied. The results showed that under the condition of high injection rate/low gas pressure, the impact time gets early and the diffusion range gets to be increased; when the injection rate/background gas pressure is constant, the diffusion distance will change dynamically due to the wall roughness, that is to, increase first and then decrease; the increase of the roughness of the contact wall will promote the increase of the height of spray impingement, however, as the temperature of the contact wall rises, the difference in height of spray impingement gets to be decreased due to roughness; when the wall roughness is small, increasing the wall temperature will reduce the horizontal development distance of spray, increases roughness, the difference in height of horizontal development distance gets to be decreased due to wall temperature.

Key words: Starting process; Spray-wall impingement; Working condition; The roughness of the contact wall; The temperature of the contact wall

1. Introduction

Due to its high thermal efficiency, low fuel consumption and stable operation, diesel engines are widely used in automobiles and other industrial equipments^[1-3]. However, there is a problem when the diesel engine is running, that is, the phenomenon of fuel spray wall impingement cannot be avoided^[4,5]. Many new combustion methods can improve the efficiency of fuel utilization and reduce exhaust emissions, but at the same time, they will also make fuel spray wall impingement more frequently^[6,7]. The phenomenon of fuel spray hitting the wall has adverse effects on the operation of diesel engines, including fuel waste, increased pollution emissions, fuel spray distortion, fuel deposition and carbon deposition, and uneven temperature distribution in the cylinder. Therefore, when designing and optimizing the combustion environment, it is necessary to consider and solve the problem of fuel spray impingement to improve combustion efficiency and engine performance. When the diesel engine is started, unstable factors such as speed, cylinder pressure and temperature will cause the spray to hit the wall, which cause a lot of oil in the cylinder to adhere to the wall and then cool^[8,9]. Due to the complex environment in the engine cylinder, the characteristics of fuel spray impingement lack in-depth theoretical system, therefore, the design of spray wall impingement test during starting is helpful to understand the influence of injection rate, cylinder pressure, wall roughness, wall temperature and other factors on spray wall impingement, and it provides a basis for the optimization design of combustion environment^[10].

The spray process of high-pressure fuel in the engine or the spray impingement process occurs in a relatively short time. Considering the complex environment in the cylinder, it is difficult to carry out the spray test based on the diesel engine^[11-13]. First of all, high-speed camera technology has promoted positive progress in the research of spray impingement^[14,15]. Safiullah S et al.^[16] used the constant volume bomb as the test environment, introduced the laser extinction method and the concentric circuit method to analyze the influence of different conditions on the fuel spray penetration distance, the results showed that increasing the injection pressure and reducing the ambient pressure would help to increase the penetration distance of spray wall impingement; Ahamed S et al.^[17] set the temperature and pressure to normal values, divided the spray wall collision process into different regions, and measured the distribution of particle diameters and their horizontal velocities after wall collision with a Doppler phase analyzer (PDA), the results showed that with the rise of wall temperature, the size of the spattered particles formed by spray impingement would gradually decrease; Putrasari Y et al.^[18] used a laser analyzer and a high-speed camera to record the development process of fuel spray impingement at room temperature and high pressure, the results showed that the development distance of particles in the horizontal direction would increase with the increase of fuel injection pressure and the decrease of ambient pressure, at the same time, the wall temperature had little influence on this characteristic. With the deepening of experiments, many studies have proposed models based on spray impingement^[19,20]. Subedi, K et al.^[21] put forward the spray impingement model in the 1990s, the model is divided the wall collision process into 3 stages, but the model ignores the momentum loss in the wall collision; Hanafi N S M et al.^[22] proposed the spray impingement model from the perspective of energy conservation and momentum conservation, this model was proposed under the condition that the wall temperature is less than the fuel boiling point, so there are certain restrictions. Recently, the visualization method^[23,24] has been widely used in the research of engine spray wall impact due to its intuitive, efficient and other characteristics, among them, the constant volume bomb^[25-27] has become an important auxiliary means to study the spray wall impact process because of its simple structure, low cost, short test cycle and other

characteristics. Mujtaba M A et al.^[28] analyzed the change rule of diffusion distance caused by fuel adhesion and spray impingement when conducting impact test for airway injection; Anurag et al.^[29] studied the change of the oil film thickness of spray impingement, designed a oil film test platform of vertical shooting, and measuring the change of the oil film thickness of wall surface under different temperature conditions by laser induction method. The above research has made a lot of achievements in the field of spray wall impact, but lacks visual effect. Although spray impingement temperature is a common variable, none of the above literatures has analyzed the effect of this variable on spray impingement effect. Increasing the spray impingement temperature will change the wall roughness in the existing test environment^[30,31], the spray impingement temperature and wall roughness should be taken as a whole assumption to analyze their impact on the spray impingement effect, the above research only tests them as a single condition, respectively, there is a lack of relevant research on using them as an overall experimental condition for testing.

Therefore, this study introduces a visual method to analyze the effects of fuel injection rate, background gas pressure, wall roughness and wall temperature on spray impingement during diesel engine starting. The spray impingement temperature and wall roughness were taken as the overall assumptions, and were comprehensively considered in the experiment. Through visualization method, we can directly observe the influence of different parameters on spray wall impact effect, and deeply analyze their interaction. This comprehensive analysis method can provide more comprehensive and accurate results, and provides a new way to further explore the influencing factors and mechanism of spray impingement phenomenon during diesel engine starting.

2. Experimental setup

2.1 Test system composition

The spray impingement device of this test consists of constant volume spray bombs, high-pressure mechanical fuel injection pump test bench, high-speed camera system, data acquisition and control parts.

(1) Constant volume spray bomb: Constant volume spray bomb is a device used to produce spray after impact. The utility model comprises a sealed container, which is filled with spray liquid and compressed gas. In the experiment, through the trigger device, the spray liquid and compressed gas are released to produce impact, so that the spray is formed.

(2) High pressure mechanical fuel injection pump test bench: The high pressure mechanical fuel injection pump test bench is used to generate high pressure spray. It usually consists of a high-pressure oil pump, fuel injector, and related control system. The high-pressure fuel pump sends fuel to the fuel injection nozzle through the pressure transmission system, and produces high-speed spray through the fuel injection nozzle. This part is mainly used to compare with the constant volume spray projectile and study the influence of different spray modes on the impact spray.

(3) High speed camera system: High speed camera system is used to capture the image of spray after impact. It usually includes high-speed cameras, appropriate lenses, and related light sources. The high-speed camera system can take continuous images at a very fast speed to capture the dynamic process of spray.

(4) Data collection and control part: The data collection and control part is used to monitor and record various parameters in the experiment. It usually includes sensors, data acquisition devices, and

corresponding control software. This part can obtain the data of each part of the spray wall impinging device in real time, such as pressure, temperature, flow, etc., and store them or conduct real-time analysis.

These parts together constitute a spray wall impingement device, which is used for the related experimental research of spray after impact. Through the reasonable configuration and operation of these parts, valuable data and information about the post impact spray behavior can be obtained. The composition of spray wall impact test is shown in Figure 1:

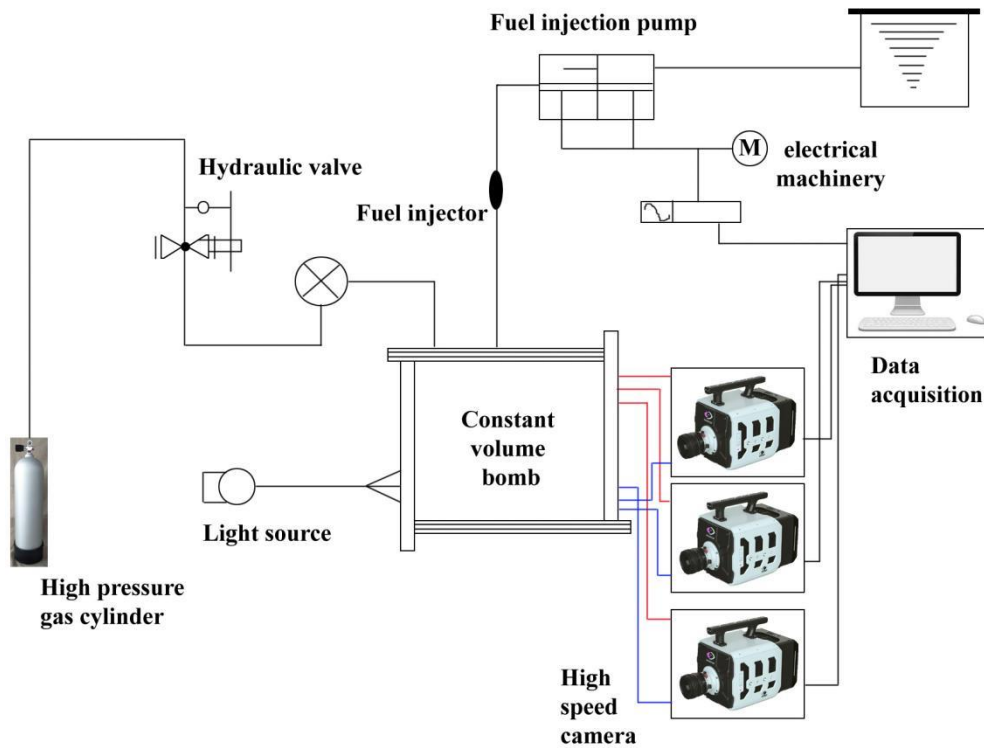


Fig. 1. System composition of spray wall impingement

In the spray impingement test, in order to reduce the influence of the oil spray between adjacent orifices, the oil baffle ring is used for drainage, the oil baffle ring of the injector is set as shown in Fig. 2, and the effect of the oil spray drainage is shown in Fig. 3.

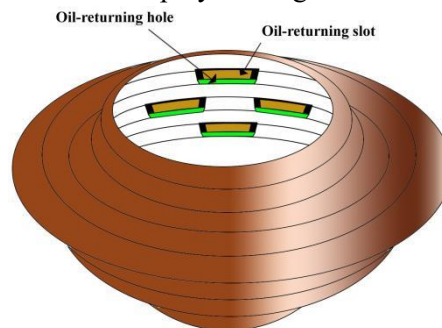


Fig. 2. Design of fuel injector retaining ring

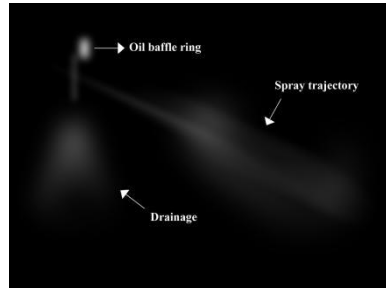


Fig. 3. The drainage effect of the oil baffle ring

In the high-speed camera set, a specific oil beam will be observed, the diameter of the fuel injector's nozzle is 0.30mm, the number of nozzles is 8, and the injection opening pressure is 19.6MPa, the parameters of the fuel injector and injection pump in the test are shown in Table 1:

Table 1 Parameter table for each factor

Parameter Name	Parameter value
Plunger diameter(mm)	13
injection advance angle($^{\circ}$)	-30
Injection opening pressure(MPa)	19.6
Oil delivery pressure(MPa)	0.25~0.30
Jet cone angle($^{\circ}$)	140
The ratio of nozzle length to aperture	6.88

2.2 Test plan

During the spray wall impact test, - 35 # diesel fuel was selected as the fuel injection material to conduct a comparative study on the spray impingement according to the fuel injection rate, background gas pressure, wall roughness, and wall temperature, the scheme formulation is shown in Table 2:

Table 2 Overall test scheme of spray impingement

Test steps	description
Effect of fuel injection rate on spray impingement	<ol style="list-style-type: none"> 1. The background gas pressure inside the constant volume bomb is controlled at 1.5MPa, the gas temperature and fuel temperature inside the constant volume bomb are both 20 $^{\circ}$C, and the wall roughness of the combustion chamber is $Wr=0.55\mu\text{m}$, start recording when the time point of fuel injection is 0; 2. Set the fuel injection rates to 50mg/ms, 90mg/ms, and 140mg/ms respectively; 3. The images of spray impingement and diffusion distance l at different injection rates at different time points are recorded.
Influence of	<ol style="list-style-type: none"> 1. The fuel injection rate is 50mg/ms, the gas temperature and fuel

background gas pressure on spray impingement	<p>temperature inside the constant volume bomb are both 20 °C, roughness of combustion chamber wall surface $W_r=0.55\mu\text{m}$, start recording when the time point of fuel injection is 0;</p> <p>2. The background gas pressures are 1.5MPa, 2.0MPa, and 2.5MPa, respectively;</p> <p>3. The images of spray impingement and diffusion distance l at different background gas pressure at different time points are recorded.</p>
impingement characteristics of fuel injection on different roughness levels	<p>1. The fuel injection pressure is 80MPa, the fuel injection lasts for 1ms, and the wall temperature is set to 85°C;</p> <p>2. Obtain the extended images of spray impinging on the wall in the horizontal direction under different roughness conditions;</p> <p>3. Obtain the change of fuel spray impingement height under different roughness conditions;</p> <p>4. Change the wall temperature to obtain the radial penetration distance of spray under different roughness conditions;</p> <p>5. Change the wall temperature to obtain the spray impingement height under different roughness conditions.</p>
impingement characteristics of fuel injection at different wall temperatures	<p>1. The fuel injection pressure is 80MPa, the fuel injection lasts for 1ms, and the wall roughness is $3.83\mu\text{m}$;</p> <p>2. Acquire the horizontal expansion image of spray impinging on the wall under different wall temperature conditions;</p> <p>3. Obtain the change of fuel spray impingement height under different wall temperature conditions;</p> <p>4. Change the roughness to obtain the radial penetration distance of spray under different wall temperature conditions;</p> <p>5. Change the roughness to obtain the height of spray impingement at different wall temperatures.</p>

In the experiment, to reduce experimental errors, each group of experiments was repeated 3 times, and the corresponding experimental conditions are shown in Table 3:

Table 3 Test conditions

Reference name	Parameter value
ambient temperature(°C)	20
Fuel temperature(°C)	20
High speed camera shooting speed(kHz)	20
Image resolution(pixel)	573 x 341
time of exposure(μs)	1.1

2.3 Definition of spray impingement parameters

In this paper, the macro parameters of spray impingement are mainly focused on the left

side of the spray, where the piston top wall is set. When defining the fuel spray impingement parameters, let the distance from spray to impingement be expressed as d , The distance that develops along the piston top wall towards the piston top direction after the collision is called the collision diffusion distance or radial penetration distance, that is l , the reflection height of the same side spray after impingement is h , as shown in Fig.4.

3. Image acquisition method

In order to visually analyze the spray process and the oil film evaporation formed by the spray impingement, it is necessary to capture the spray process and the impingement process of the fuel in a very short time, generally only 0-3ms, therefore, the ordinary camera technology cannot capture the required image information, and high-speed camera technology is required. Image acquisition consists of high-speed cameras, a light source, and a data acquisition section connected to cameras.

The experimental image is collected by the Mini UX100 high-speed camera produced by Fastcam company, based on different experimental requirements, the shooting speed range is between [2000fps, 10000fps], and the camera lens adopts short focus lens of NIKKOR AF 24mm f/2.8D. The experiment is selected a 200W LED light source and processed the light according to different experimental needs. The experiment has a more accurate grasp of the fuel injection process, in order to ensure the synchronization of the captured images, the trigger of the camera and the trigger of the fuel injector in the fuel injection system are controlled by the same signal during the experiment. The image information captured by the camera is stored in the computer by a connecting circuit, and experimental data is obtained by post-processing.

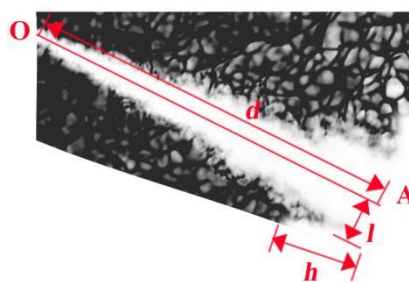


Fig. 4. Macroscopic parameters of spray impingement

4. Results and discussion

4.1. Effect of fuel injection rate on spray impingement

Fig. 5 shows the change curve of fuel injection speed accompanied by oil pump speed during diesel engine starting, the peak values of fuel injection speed are 50mg/ms, 90mg/ms and 140mg/ms respectively, and the images of circulating spray impingement at different fuel injection speeds are compared.

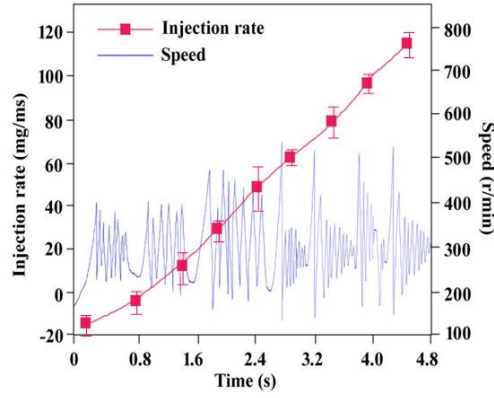


Fig. 5. The curve of fuel injection speed following the change of oil pump speed during the starting process

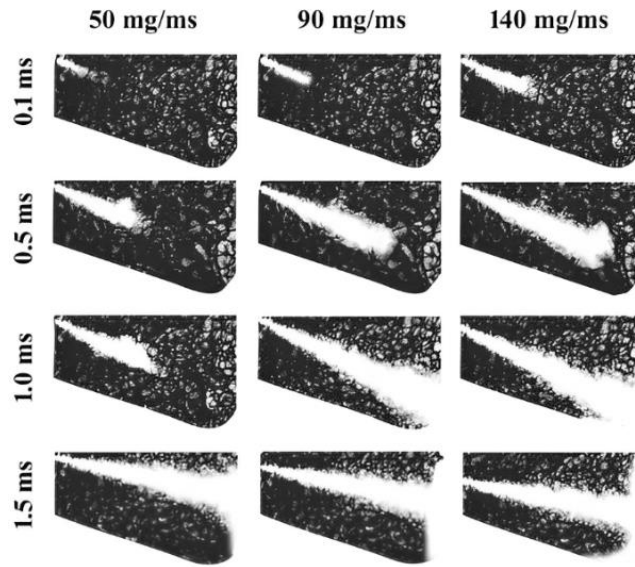


Fig. 6. Images of spray impingement at different injection rates

In the test of the influence of fuel injection speed on spray impingement, the background gas in the constant volume bomb was controlled at 1.5MPa, the gas temperature and fuel temperature in the constant volume bomb were both 20 °C, and the combustion chamber wall roughness $Wr=0.55\mu\text{m}$, set the starting point of fuel injection to zero and start recording. The corresponding spray impingement image when the injection speed is 50mg/ms, 90mg/ms and 140mg/ms respectively is shown in Fig. 6, and corresponding curve of spray impingement diffusion distance versus time is shown in Fig. 7:

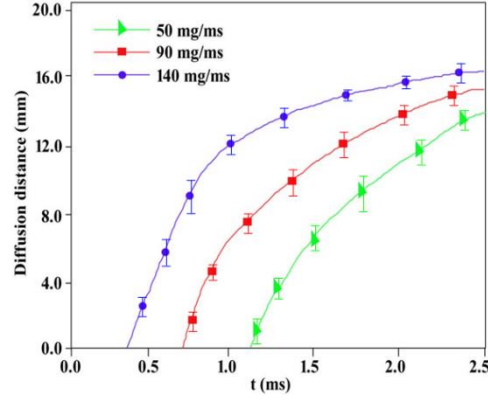


Fig. 7. Variation curve of spray wall impingement diffusion distance/time under different peak fuel injection speeds

In Fig. 6 and Fig. 7, under the same background gas pressure, with the increase of the injection speed, the spray impingement time is advanced, when the injection speed is 50mg/ms, 90mg/ms and 140mg/ms, the spray impingement time points are 1.2ms, 0.8ms and 0.4ms respectively. After impingement, when spray for 2.5ms, the impingement diffusion distance will also increase with the increase of injection speed, which is 11.8mm, 13.6mm, 15.2mm in sequence. The reason for the different diffusion distances after impingement may be due to the increase in injection molding, which also accelerates the emission speed of the droplets, the average Weber number of the droplets is higher when they come into contact with the wall, which results in splashing of the droplets during the impingement, thereby it will increase the diffusion distance of impingement. In practical applications, the diffusion range of spray on the wall can be limited by adjusting the wall temperature and changing the distance between the spray and the wall to avoid excessive droplet splash and energy loss.

4.2. Influence of background gas pressure on spray impingement

Install a sensor for measuring pressure in the cylinder of the diesel engine, with the model being Honeywell's PX3 series. The sensor will convert the cylinder pressure signal into an electrical signal and transmit it to a computer or data recording device through a data acquisition system to measure and record the pressure changes inside the cylinder in real time.

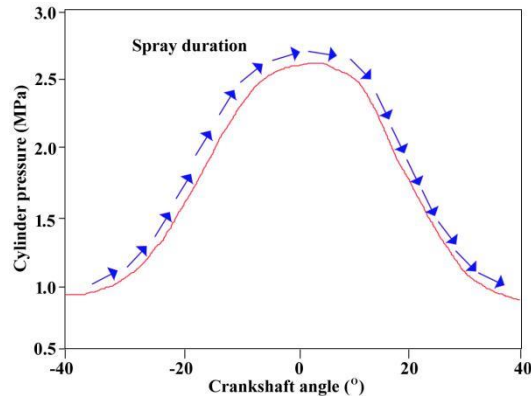


Fig. 8. Curve of the change in cylinder compression pressure during the process of starting and reversing a diesel engine

Fig. 8 shows the change curve of the compression pressure in the cylinder during the diesel engine starting and backward dragging, in which the corresponding cylinder pressure range during the spray duration is about 1.5MPa~2.5MPa. In the test of the influence of background gas pressure on spray impingement, background gas pressures are taken 1.5MPa, 2.0MPa and 2.5MPa respectively to test the difference of spray impingement images under different background gas pressures, the injection speed was set to 50mg/ms, the gas and fuel temperature in the constant volume bomb were both 20 °C, and the combustion chamber wall roughness $Wr=0.55\mu\text{m}$, set the starting point of fuel injection to zero and start recording. The corresponding spray impingement image under different background gas pressure conditions is shown in Fig. 9, and the change curve of spray impingement diffusion distance with time is shown in Fig. 10.

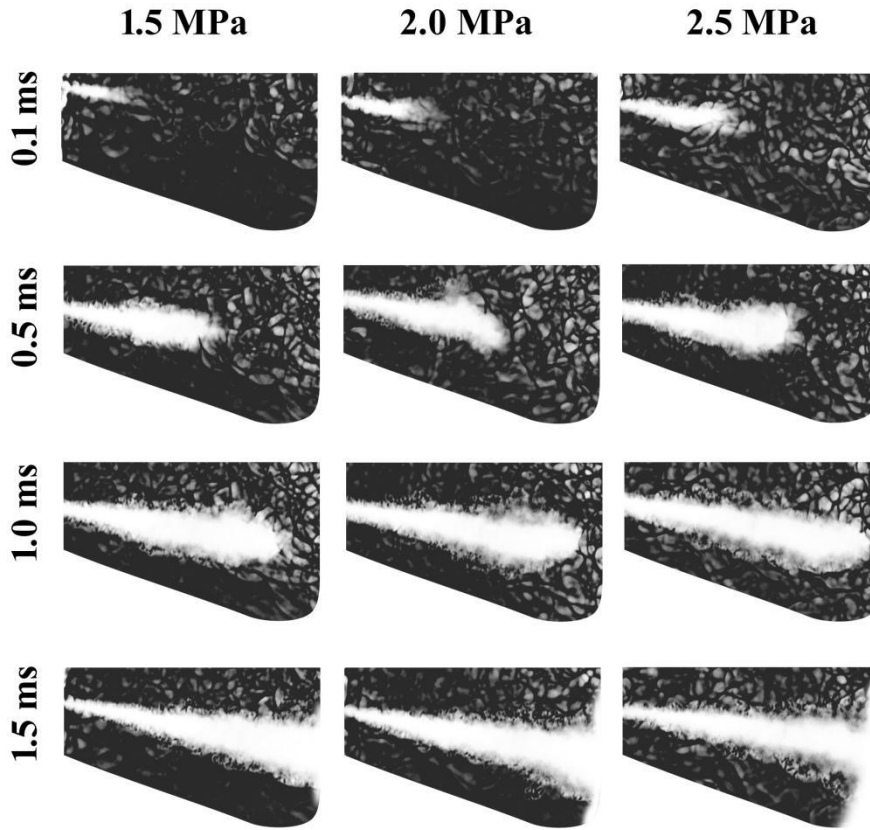


Fig. 9. Images of spray impingement on the wall under different background gas pressures

It is found in Fig. 9 and Fig. 10 that when the injection speed is constant, the spray impingement time is advanced with the decrease of the background gas pressure, when the background gas pressure is 2.5MPa, 2.0MPa, and 1.5MPa, the spray impingement time point is 0.86ms, 0.72ms, and 0.63ms respectively, after impingement, when spray is applied for 3.0ms, the impingement diffusion distance increases with the decrease of background gas pressure, which is 8.8mm, 9.7mm, and 10.6mm in turn. The reason may be a decrease in background gas pressure and droplet resistance, which accelerates the droplet injection speed and increases the average Weber number of droplets when they come into contact with the wall, which leads to splashing when a large number of droplets collide with the wall per unit time, thereby it increases the diffusion distance of the impingement. In practical application, when designing

and optimizing the spray system, the background gas pressure can be adjusted to achieve better spray wall impact effect.

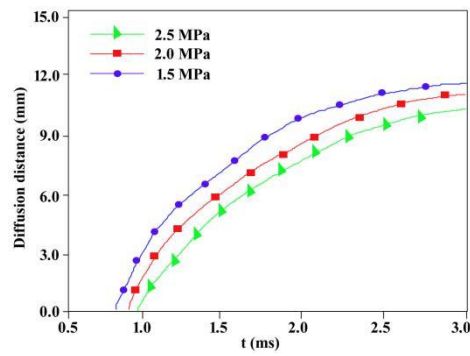


Fig. 10. Variation curve of spray wall impingement diffusion distance/time under different background gas pressure conditions

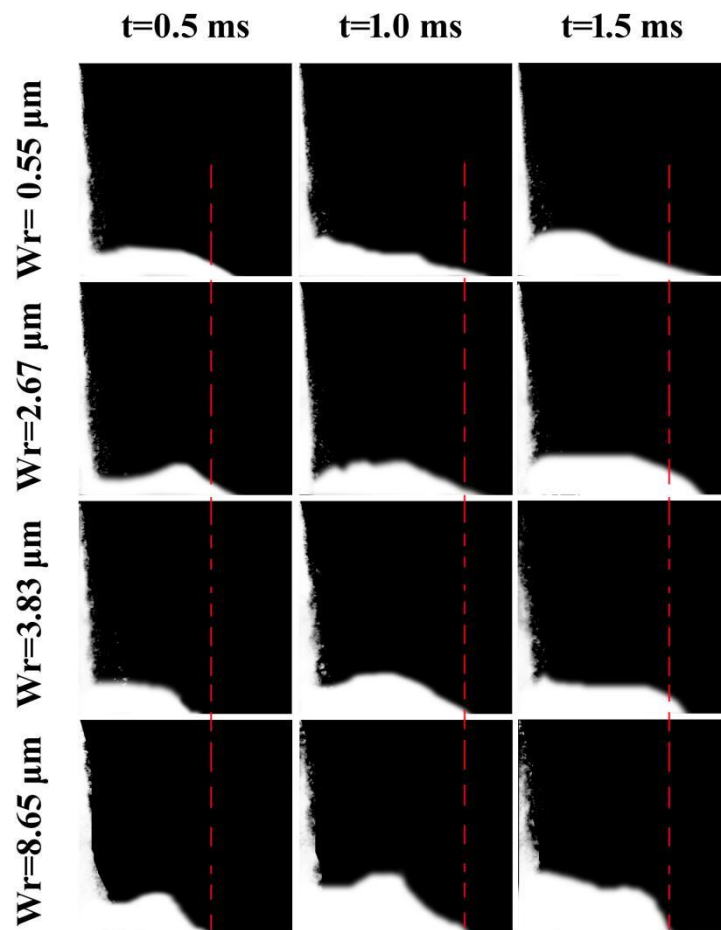


Fig. 11. Comparison of the influence of wall roughness on the radial penetration distance of spray

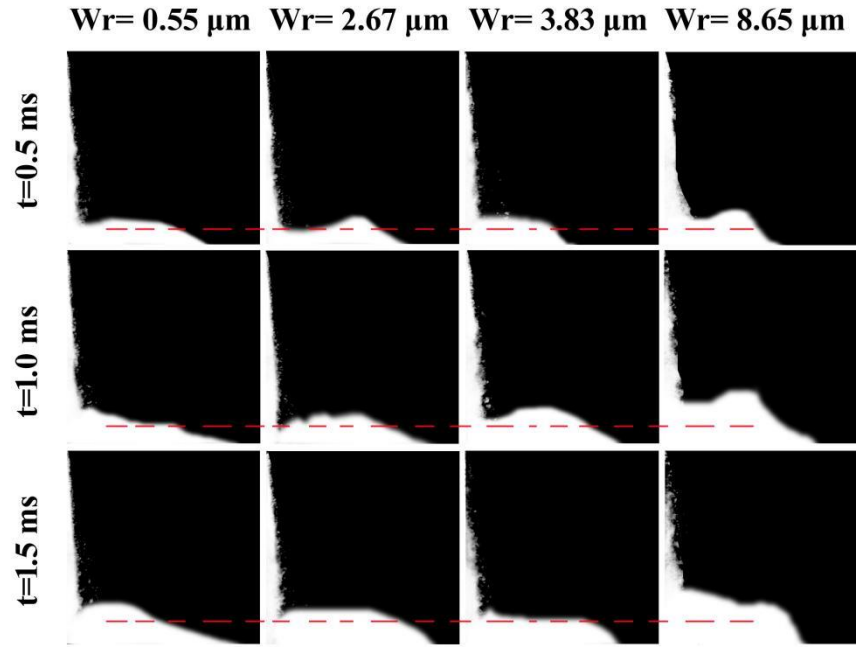


Fig. 12. Comparison of effects of wall roughness on spray impingement height

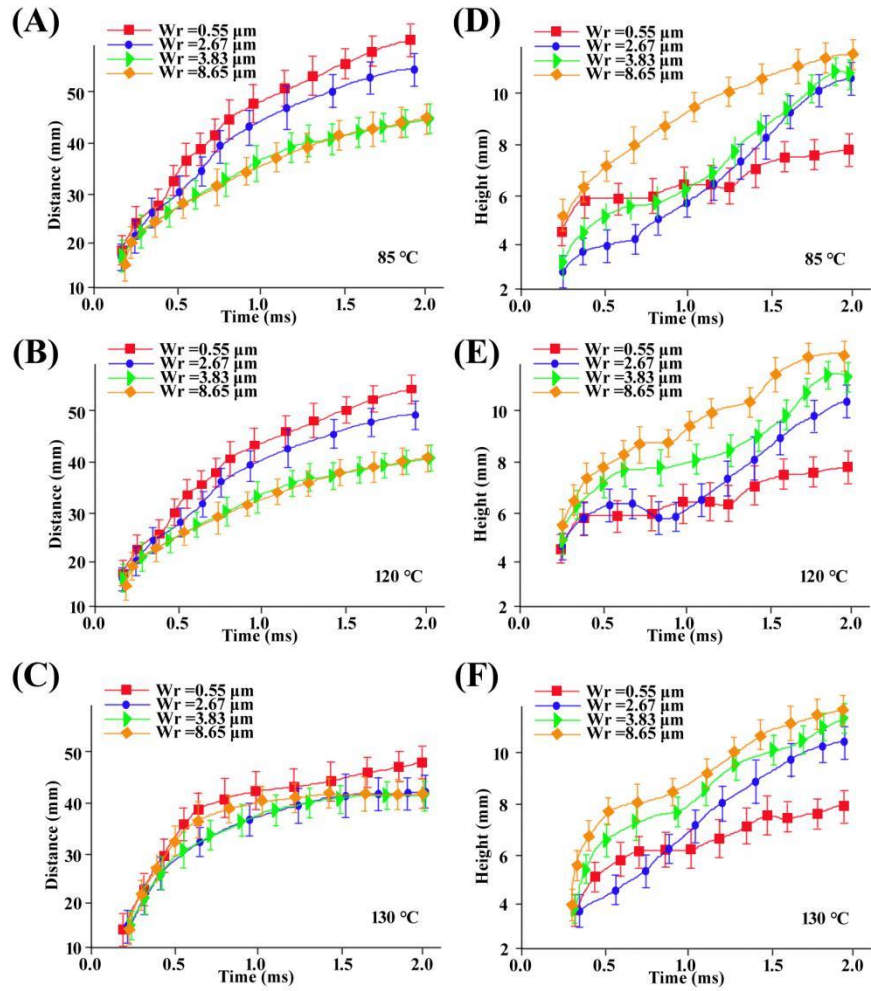


Fig. 13. (A) (B) (C) represents the radial penetration distance of - 35 # diesel doing

spray
under different conditions, (D) (E) (F) represents height's comparison of
spray impingement under different conditions with - 35 # diesel

4.3. Effects of wall roughness and wall temperature on the characteristics of spray impingement

4.3.1. Effect of wall roughness on wall impingement characteristics of spray

Set the fuel injection pressure to 80MPa, the fuel injection duration to 1ms, and the wall temperature to 85 °C, calculate the development of -35 # Minchai fuel doing spray impingement in the horizontal direction under different wall roughness, as shown in Fig. 11.

The spray images are collected in 0.5ms, 1ms and 1.5ms after the oil spray contacts the wall in Fig. 11, it can be seen from the macro images that with the development of time, the spray impingement continues to expand outward, and the extended spray front will gradually become thin, and form a certain angle along the development direction of spray. At the same time, comparing the spray with different wall roughness at the same time point, it can be found that with the increase of spray roughness, the spread distance of the oil spray along the horizontal direction gradually decreases, but with the progress of time, the difference does not further increase, so it can not be clearly demonstrated that its differences in their development speed in the horizontal direction.

Fig. 12 shows the influence of wall roughness on the height of spray impingement under the same test conditions, from the macro image, it can be seen that the height of spray impingement at the same time point gradually increases with the increase of wall roughness, with the progress of spray, the difference between the height of spray impingement under different roughness has a gradually increasing trend. This is because the rough wall changes the interaction between spray and wall, and increases the contact area, turbulence effect and wettability, so that more spray particles collide, scatter and attach when they hit the wall, thus increasing the impact height of spray. Some macro images show that we increase the surface roughness of collision walls at the same wall temperature, and the development distance along the horizontal direction gradually decreases after the spray impingement, but The influence of roughness on the development speed after spray impingement is not obvious.

In Fig. 13(A), Fig. 13(B) and Fig. 13(C), at the same wall temperature, the radial development distance of spray impinging on the wall gradually decreases when the roughness of the contact wall increases. When the roughness continues to increase, the influence on the horizontal development distance of spray becomes more and more obvious, especially when the wall temperature is low. This is because the high temperature wall increases the heat conduction and heat transfer rate between spray particles and the wall, promotes the rapid evaporation of spray particles and reduces the radial diffusion speed of droplets. These factors make spray particles evaporate completely in a short distance, and limit their diffusion range in the horizontal direction, thus reducing the horizontal spread distance of spray. On the one hand, when the temperature rises, the impact of spray on the wall makes the difference in the horizontal development distance of spray under various wall roughness gradually narrow, that is, the rise of wall temperature weakens the influence of roughness on the horizontal

propagation of spray; on the other hand, the increase in wall temperature makes the time point of differences in radial development distance occur gradually move back due to different roughness.

In Fig. 13(D), Fig. 13(E) and Fig. 13(F), although the data has been corrected, the data fluctuation of spray impingement height is larger than that of horizontal development distance from the perspective of data error. From the overall curve change, with the increase of the wall roughness, the height of spray impingement will gradually increase, and with the rise of the temperature of the contact wall, the difference in the height of spray impingement caused by the roughness will decrease. In practical application, the surface treatment technology is used to fine adjust the wall roughness to achieve accurate control of the height of spray hitting the wall.

According to the above experimental results, it can be concluded that when the roughness of the contact wall increases, the radial development distance of the spray against the wall decreases gradually. This shows that when the roughness of the wall increases, the concave-convex structure on the wall will cause airflow disturbance near the wall. These disturbances will affect the trajectory of the spray, making it impossible for the spray to travel at its original speed and distance in the radial direction. Therefore, with the increase of wall roughness, the radial development distance of spray against wall decreases.

At the same time, the increase of wall temperature will weaken the influence of roughness on the spray propagation in the horizontal direction and reduce the horizontal spreading distance of the spray. When the wall temperature rises, the air near the wall will be heated to a certain extent because the temperature difference between the wall and the spray is reduced. This heating reduces the thickness of the boundary layer and increases the velocity gradient of the air. Compared with the cold wall, the boundary layer flow on the hot wall is faster and more stable, so the influence of roughness on the horizontal propagation is weakened, and the horizontal spreading distance of the spray is reduced.

In addition, with the increase of wall roughness and the rise of the contact wall temperature, the height of the spray wall will gradually increase, but the difference of spray wall height caused by roughness will decrease. This shows that the variation of wall roughness and temperature will affect the droplet behavior after impact spray. Higher roughness and temperature difference will increase the droplet hydrodynamics effect and increase the droplet height after hitting the wall. However, with the increase of roughness and temperature, the forces on the droplets on the wall become more similar, resulting in a gradual decrease in the difference in the height of spray impact due to roughness.

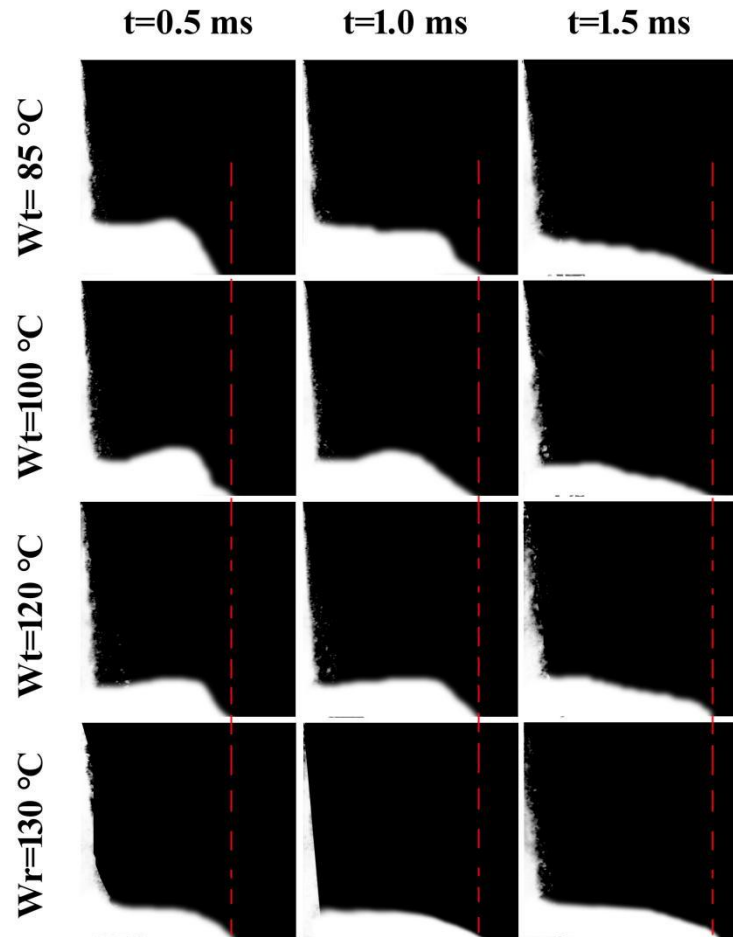


Fig. 14. Comparison of the influence of wall temperature on the radial penetration distance of spray

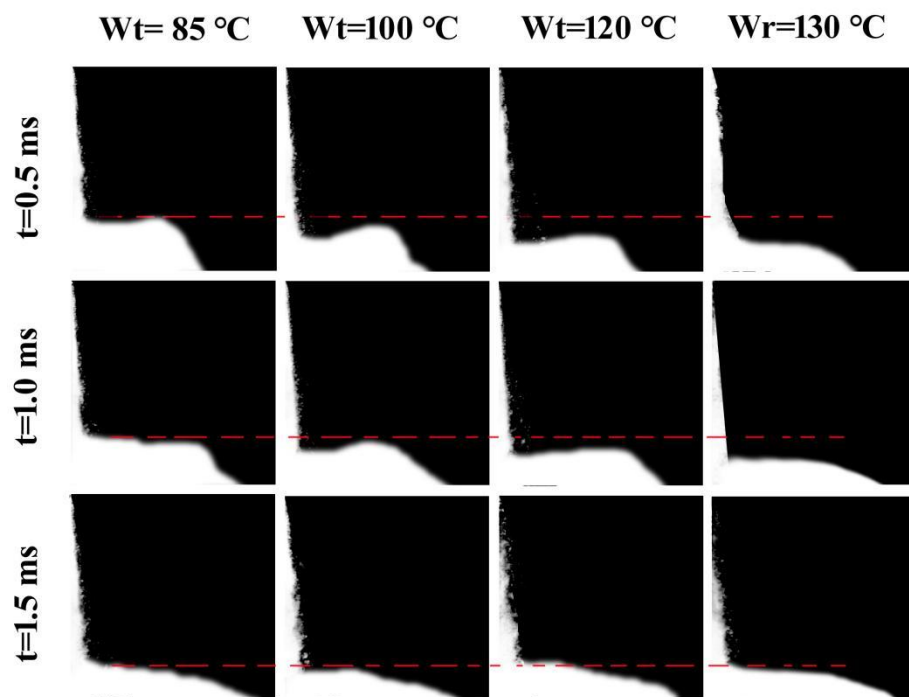


Fig. 15. Comparison of influence of wall temperature on spray impingement height

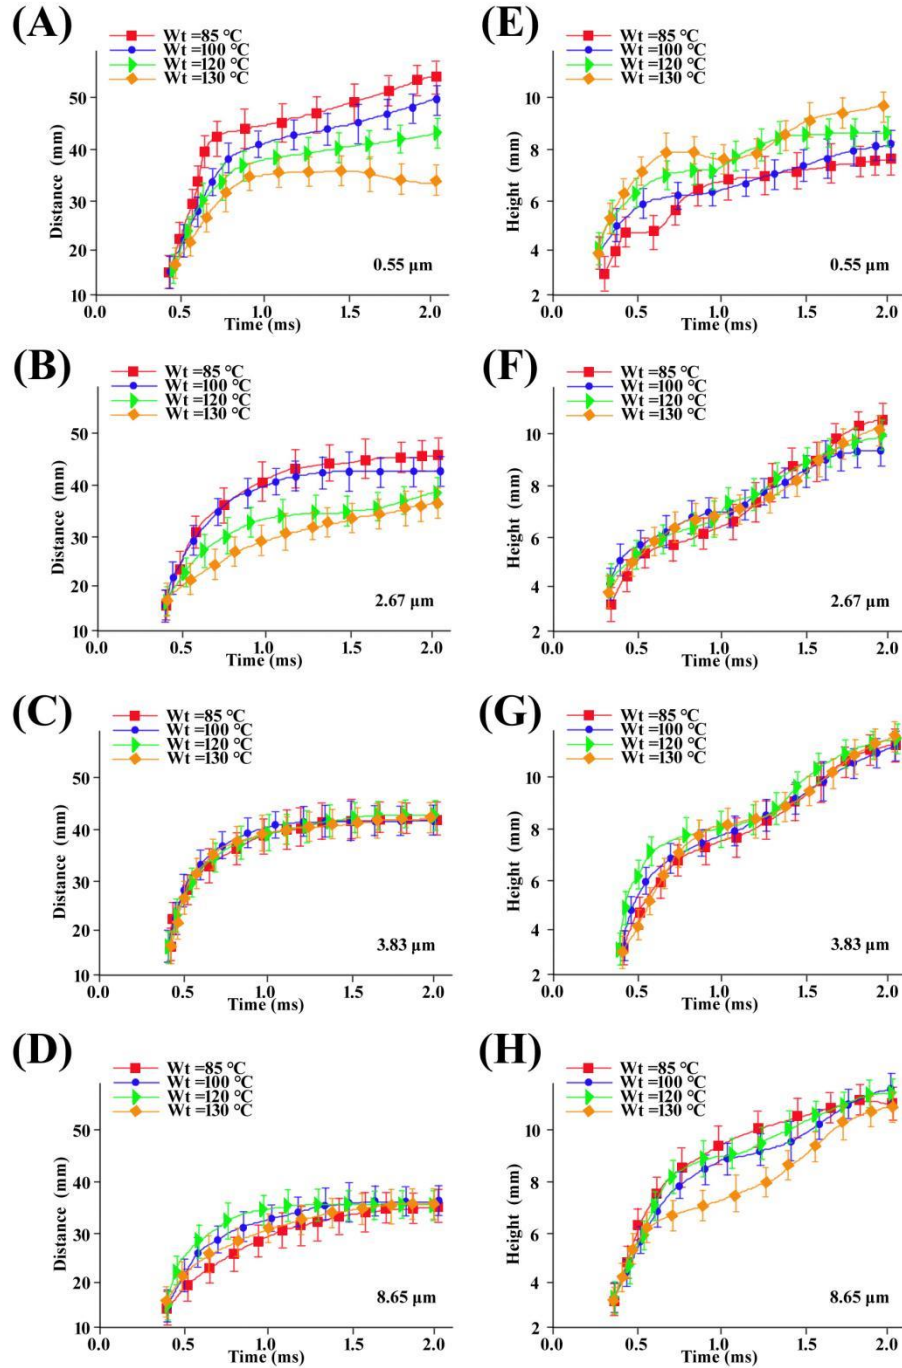


Fig. 16. (A) (B) (C) (D) represents the radial penetration distance of - 35 # diesel doing spray under different conditions, (E) (F) (G) (H) represents height's comparison of spray impingement under different conditions with - 35 # diesel

4.3.2. Effect of wall temperature on the characteristics of spray impingement

The injection pressure is set to 80MPa and the injection duration is 1ms, the roughness of the -35 # civil diesel fuel on the wall is 3.83 μ m, Fig. 14 shows the horizontal expansion of spray at different wall temperatures. Through image comparison, as time goes on, the outward expansion form of spray along the wall direction under different wall temperature is similar, and the development front of spray gradually becomes sharp and thin. In the macro image, it is

not observed that with the change of wall temperature, the development distance of spray impinging on the wall in the horizontal direction will change significantly at the same time point.

Under the condition of changing the wall temperature (85 °C, 100 °C, 120 °C and 130 °C), the impact of spray impingement on the height of the wall can be shown in the Fig. 15, the macro image shows that with the rise of the wall temperature, the height of spray impingement will decrease, but this rule is not obvious, and there are still fluctuations at some time points.

In Fig. 16(A), Fig. 16(B), Fig. 16(C) and Fig. 16(D), when the wall roughness is small ($Wr=0.55\mu\text{m}$ and $Wr=2.67\mu\text{m}$), there is a phenomenon in the horizontal development of spray impingement, that is, with the increase of wall temperature, and the horizontal development distance of spray decreases, further observation shows that the lower the wall temperature, the longer the forward development duration of spray. When the wall roughness increases ($Wr=3.83\mu\text{m}$ and $Wr=8.65\mu\text{m}$), the development of spray impingement in the horizontal direction has no obvious effect under the change of wall temperature. The test results show that under different wall temperatures, the distribution of each curve basically coincides, and spray points will appear partial separation at the beginning of the impingement and at the end of the spray, however, the position relationship of these separation spray points is not the same as that generated by the wall temperature change with small roughness.

In Fig. 16 (E), Fig. 16 (F), Fig. 16 (G) and Fig. 16 (H), the influence of different roughness changes on the spray impingement height is more obvious, when the roughness is constant, the influence of wall temperature on the spray impingement height is not obvious. Under the condition of low wall roughness ($Wr=0.55\mu\text{m}$), there is a trend that the height of spray impingement increases with the rise of wall temperature, but when the wall roughness rises, the time goes on, and the height of spray impingement under each roughness condition is basically the same. Compared with the reference data in the previous section, for - 35#diesel fuel, the influence of wall roughness on spray impingement height is stronger than that of wall temperature on spray impingement height in the whole experiments. In practical application, the horizontal development and separation of spray can be improved by optimizing the wall processing technology, controlling the wall temperature and roughness.

According to the above experimental results, it can be concluded that under the condition of small wall roughness, the horizontal development distance of spray gradually decreases with the increase of wall temperature, and the duration of spray forward development will be longer. This shows that the small wall roughness means that the liquid film formed on the wall is relatively flat. When the temperature rises, the airflow near the wall will rise after being heated to form a strong convection, which will prompt the spray to mix with the airflow faster. As the droplet thermal evaporation rate increases, the liquid phase heat transfer between adjacent droplet decreases, resulting in a smaller distance for spray horizontal development, because the droplet is more likely to evaporate rapidly. In addition, the phenomenon of thermal convection prolongs the time for droplets to evaporate after the wall impact, resulting in a longer duration for the spray to develop forward.

However, when the wall roughness increases, the change of wall temperature has no obvious effect on the spray development in the horizontal direction. In addition, under different roughness conditions, the influence of wall temperature on the height of spray impact is not

obvious. This shows that larger wall roughness means that there is more drag and turbulence along the droplet's transport path. The concave-convex structure of these rough surfaces causes turbulent layers to form, resulting in a larger gradient of turbulent velocity leaving the droplet. Therefore, the change of wall temperature has no obvious effect on the horizontal development of spray. For the spray wall impact height, larger wall roughness will increase the droplet collision probability and impact energy loss, while the wall temperature has limited influence on it, because the temperature change cannot significantly change the interaction between the droplet and the wall.

5. Conclusions

As an important power equipment, diesel engine has attracted much attention in fuel utilization efficiency and exhaust emissions, this paper focuses on the phenomenon of fuel spray impingement, we design a visual constant volume spray impingement test system, and adjust according to different factors, and test the spray impingement after adjustment.

(1) The results show that the injection speed and the background gas pressure are adjusted by the droplet Weber number during the wall impact process. When the injection speed is 50mg/ms, 90mg/ms and 140mg/ms, the spray wall impact time points are 1.2ms, 0.8ms and 0.4ms respectively; When the background gas pressure is 2.5 MPa, 2.0 MPa and 1.5 MPa respectively, the time points of spray impingement on the wall are 0.86 ms, 0.72 ms and 0.63 ms respectively, indicating that the greater the injection speed and the lower the background pressure, the greater the diffusion distance of impingement on the wall;

(2) The diffusion distance of spray in the horizontal direction after wall collision needs to consider the wall roughness and wall height at the same time, the increase of temperature or wall roughness will weaken the influence of another condition on the diffusion distance of spray;

(3) The impingement height of spray is limited by the test conditions and data collection, and the results have some volatility, but it can be clearly seen that the impingement height is affected by the wall roughness.

Nomenclature

D	-Distance from spray to wall collision, m
PDA	-Phase Doppler Analyzer
Wr	-Roughness of combustion chamber wall surface, μm

References

- [1] Cunanan C, Tran M K, *et al.* A review of heavy-duty vehicle powertrain technologies: Diesel engine vehicles, battery electric vehicles, and hydrogen fuel cell electric vehicles. *Clean Technologies*, 3 (2021), 2, pp. 474-489. DOI: 10.3390/cleantechnol3020028.
- [2] Sule A, Latiff Z A, *et al.* Recent advances in diesel-biodiesel blended with nano-additive as fuel in diesel engines: A detailed review. *Automotive Experiences*, 5(2022), 2, pp. 182-216.

DOI: 10.31603/ae.6352.

- [3] Stoumpos S, Bolbot V, *et al.* Safety performance assessment of a marine dual fuel engine by integrating failure mode, effects and criticality analysis with simulation tools. *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of Engineering for the Maritime Environment*, 236(2022), 2, pp. 376-393. DOI: 10.1177/14750902211043423.
- [4] Wu H, Cao W, *et al.* Wall temperature effects on ignition characteristics of liquid-phase spray impingement for heavy-duty diesel engine at low temperatures. *Combustion Science and Technology*, 195(2023,) 3, pp. 456-471. DOI: 10.1080/00102202.2021.1961133.
- [5] Mohaddes D, Boettcher P, *et al.* Hot surface ignition of a wall-impinging fuel spray: Modeling and analysis using large-eddy simulation. *Combustion and Flame*, 228(2021), pp.443-456. DOI:10.1016/j.combustflame.2021.02.025.
- [6] Singh P, Singh H, *et al.* Experimental investigation on combustion characteristics of novel preheated air swirl burner operating on the heavy oil fired furnace for reducing NOx emission. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, 45(2023), 1, pp. 96-110. DOI: 10.1080/15567036.2022.2164811.
- [7] Liu W, Tang J, *et al.* Eulerian–Lagrangian modeling of spray G atomization with focus on vortex evolution and its interaction with cavitation. *Applied Mathematical Modelling*, 107(2022), pp.103-132. DOI:10.1016/j.apm.2022.01.017.
- [8] Akeel A M, Kumar R, *et al.* Hard to cut metal alloys machining: Aspects of cooling strategies, cutting tools and simulations. *Materials Today: Proceedings*, 62(2022), 6, pp. 3208-3212. DOI: 10.1016/j.matpr.2022.04.053.
- [9] Li H, Jiang J, *et al.* Effects of coflow velocity and coflow moisture contents on the formation and emissions of CO/NO in non-premixed impinging flames. *Numerical Heat Transfer, Part A: Applications*, 79(2021), 8, pp. 594-610. DOI: 10.1080/10407782.2021.1872269..
- [10] Han Y, and Zhu Y. Study on the effect of supercritical CFB boiler air preheater and flue gas treatment facilities on sulfur trioxide emission characteristics. *Energy Reports*, 8(2022), pp. 926-939. DOI: 10.1016/j.egyr.2022.02.020.
- [11] Zhao W, Yan J, *et al.* Spray, Ignition, and Combustion Characteristics of Diesel, Propanol, and Pentanol Blends in a Constant Volume Chamber. *Energy & Fuels*, 35(2021), 20, pp. 16653-16664. DOI: 10.1021/acs.energyfuels.1c02533.
- [12] Yin W, Zhou G, *et al.* Numerical simulation and application of entrainment dust collector for fully mechanized mining support based on orthogonal test method. *Powder Technology*, 380(2021), pp. 553-566. DOI: 10.1016/j.powtec.2020.10.059.
- [13] Safiullah, Nishida K, *et al.* Effects of nozzle hole size and rail pressure on diesel spray and mixture characteristics under similar injection rate profile–experimental, computational and analytical studies under non-evaporating spray condition. *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, 236(2022), 2-3, pp.

310-321. DOI: 10.1177/09544070211022099.

- [14] Dizeu F B D, Picard M, *et al.* Extracting Unambiguous Drone Signature Using High-Speed Camera. *IEEE Access*, 10(2022), pp. 45317-45336. DOI: 10.1109/ACCESS.2022.3170481.
- [15] Matthes J, Kollmer M, *et al.* A High-Speed Camera-Based Measurement System for the High-Pressure Entrained-Flow Gasification. *Chemical Engineering & Technology*, 45(2022), 12, pp. 2313-2322. DOI: 10.1002/ceat.202200434.
- [16] Safiullah S, Ray S C, *et al.* Experimental Investigation of Heat Transfer in a Flat-wall Impinging Diesel Spray Flame under Diesel-like Conditions. *Journal of Mechanical Engineering, Science, and Innovation*, 3(2023), 1, pp. 30-42. DOI: 10.31284/j.jmesi.2023.v3i1.4512.
- [17] Ahamed S, Cho Y, *et al.* Development and application of a drop-wall interaction model at high ambient pressure conditions. *Atomization and Sprays*, 32(2022), 4, pp. 1-23. DOI: 10.1615/AtomizSpr.2022038549.
- [18] Putrasari Y, Lim O. Dimethyl ether as the next generation fuel to control nitrogen oxides and particulate matter emissions from internal combustion engines: a review. *ACS omega*, 7(2021), 1, pp. 32-37. DOI: 10.1021/acsomega.1c03885.
- [19] Ikram A, and Chung H .Numerical simulation of arc, metal transfer and its impingement on weld pool in variable polarity gas metal arc welding. *Journal of Manufacturing Processes*, 64(2021), pp.1529-1543.DOI:10.1016/j.jmapro.2021.03.001.
- [20] Etikyala S, Koopmans L, *et al.*. History effect on particulate emissions in a gasoline direct injection engine. *SAE International Journal of Engines*, 15(2021), 03-15-03-0999, pp. 445-455. DOI:10.4271/03-15-03-0999.
- [21] Subedi, K. and Kong, S. Modeling the Effects of Drop Impingement Frequency on Heated Walls at Engine Conditions. *SAE International Journal of Advances and Current Practices in Mobility*, 5(2023), 2, pp. 678-684. DOI:10.4271/2022-01-0508.
- [22] Hanafi N S M, Ghopa W A W, *et al.* Numerical simulation on the effectiveness of hybrid nanofluid in jet impingement cooling application. *Energy Reports*, 8(2022), pp. 764-775. DOI: 10.1016/j.egy.2022.07.096.
- [23] Smedberg H, and Bandaru S. Interactive knowledge discovery and knowledge visualization for decision support in multi-objective optimization. *European Journal of Operational Research*, 306(2023), 3: 1311-1329. DOI: 10.1016/j.ejor.2022.09.008.
- [24] Masood Z, Zheng J, *et al.* High-performance gpu based planetary-scale terrain visualization, *Proceedings of 2022 the 5th International Conference on Image and Graphics Processing (ICIGP)*. Xianye Ben, Lik-Kwan Shark, Beijing, China, 2022, pp. 261-267. DOI: 10.1145/3512388.3512426.
- [25] Reyes M , Tinaut F V ,*et al.* Combustion and Flame Front Morphology Characterization of H₂ –CO Syngas Blends in Constant Volume Combustion Bombs. *Energy & Fuels*, 35(2021), 4, pp. 3497–3511. DOI:10.1021/acs.energyfuels.0c03598.

- [26] Almutairi F S, Dinesh K K J R, *et al.*. Modelling of hydrogen-blended dual-fuel combustion using flamelet-generated manifold and preferential diffusion effects. *International Journal of Hydrogen Energy*, 48(2023), 4, pp. 1602-1624. DOI: 10.1016/j.ijhydene.2022.10.078.
- [27] Lyu Y, Dong J, *et al.* Effect of an orifice plate on the explosion behaviors of H₂–N₂O mixtures. *International Journal of Hydrogen Energy*, 47(2022), 51, pp. 21878-21882. DOI: 10.1016/j.ijhydene.2022.04.291.
- [28] Mujtaba M A, Kalam M A, *et al.* Effect of palm-sesame biodiesel fuels with alcoholic and nanoparticle additives on tribological characteristics of lubricating oil by four ball tribometer. *Alexandria Engineering Journal*, 60(2021), 5, pp. 4537-4546. DOI: 10.1016/j.aej.2021.03.017.
- [29] Anurag, Kumar R, *et al.* Comparative performance analysis of coated carbide insert in turning of Ti-6Al-4V ELI grade alloy under dry, minimum quantity lubrication and spray impingement cooling environments. *Journal of Materials Engineering and Performance*, 31(2022), 1, pp. 709-732. DOI: 10.1007/s11665-021-06183-4.
- [30] Hadad M, and Beigi M. A novel approach to improve environmentally friendly machining processes using ultrasonic nozzle–minimum quantity lubrication system. *The International Journal of Advanced Manufacturing Technology*, 114(2021), pp. 741-756. DOI: 10.1007/s00170-021-06860-7.
- [31] Presby M J, and Harder B J. Solid particle erosion of a plasma spray–physical vapor deposition environmental barrier coating in a combustion environment. *Ceramics International*, 47(2021), 17, pp. 24403-24411. DOI: 10.1016/j.ceramint.2021.05.154.

Submitted: 15.05.2023.

Revised: 25.05.2023.

Accepted: 11.07.2023.