

THERMODYNAMICS FOR 5G TECHNOLOGY AND ENERGY HARVESTING AND RELATIVE TOPICS

by

Lei ZHAO^{a,b,c}, Abdulrahman Ali ALSOLAMI^{a,b,c}, and Ji-Huan HE^{a,b,c*}

^aTextile and Clothing College, Yancheng Polytechnic College, Yancheng, China

^bDepartment of Mathematics, Faculty of Science, King Abdulaziz University, Jeddah, Saudi Arabia

^cNational Engineering Laboratory for Modern Silk, College of Textile and Clothing Engineering, Soochow University, Suzhou, China

Original scientific paper

<https://doi.org/10.2298/TSCI2403009Z>

5G communication technology has been skyrocketing, and has changed everything in our daily lives, and its applications in various fields are also promising. However, the thermal conductivity/dissipation problems of highly integrated electronic devices and electrical equipment are becoming more and more prominent, and thermodynamics offers a solution, and fractal meta-surfaces provides an extremely efficient approach to transfer the generated waste heat, which can be used for thermal energy harvesting, and a fractal thermodynamic model is developed for thermal management.

Key words: *natural fiber (wool fiber, polar bear hair), nanofiber, nanofilm, nanofluid, nanoparticle, fractal boundary-layer, fractal metamaterial, fractal metasurface*

Introduction

We have entered an unprecedented era with 5G communications technology [1], the trend towards 6G is now on the horizon [2], and the 7G era [3] is also approaching rapidly. It has changed everything in our daily lives. According to the 2023 China Internet Development Report, by June 2023, the total number of mobile base stations in China reached 11.29 million, of which 2.937 million 5G base stations were built and opened, where energy consumption has become a Gordian knot [4]. Communication equipment often generates high temperature alarms [5], and many cooling technologies [6], and thermal energy harvesting technologies [7, 8] have become hot spots in the communication field, this paper offers a promising thermodynamic solution to the emerging problem.

Thermal conductivity and thermal efficiency

Thermal management has become a critical issue for high power density equipment and devices [9, 10]. The high temperature due to high power dissipation and poor thermal conductivity will not only greatly affect the reliable operation of equipment and devices in 5G base stations, but also significantly increase the cost of controlling the temperature of the stations.

*Corresponding author, e-mail: hejihuan@suda.edu.cn

Materials scientists have been searching for new materials with high thermal conductivity and thermal efficiency for 5G base stations [11-13], among which nanomaterials are extremely promising, and bubble electrospinning [14-18] is one of the best candidates for mass fabrication of various functional nanomaterials, it has the ability to fabricate a single nanofiber with two or more interfaces [18]. This breakthrough in fiber technology has opened a new window for designing internal interfaces in a single nanofiber to embody various attractive functionalities for broad applications in 5G systems [19]. Another promising technology for 5G inspired materials is 3-D printing, which can produce various microdevices with special shapes and properties [20-22].

Advanced nanomaterials with excellent thermal conductivity can quickly transfer the waste heat proposed by the equipment and devices in 5G base stations to their surroundings, the thermal efficiency can not only improve the reliability and efficiency of the equipment and devices, but also simply the thermal management.

Waste heat and thermal energy harvesting

The equipment and devices in 5G base stations produce a large amount of waste heat [23], and energy harvesting is a key technology that provides a viable solution to the challenge at hand [24], and nanofluids can greatly enhance their efficiency and heat transfer capabilities [25-27].

Interconnections in a micro/nano-scale integrated device leave no room for traditional heat transfer, such as that of air conditioning and heating equipment for the home, only nanofluids can be used. Nanofluids can form a nanoscale boundary layer with metal nanoparticles, which is also called fractal boundary layer [28] and can be modelled by the fractional thermal model [28, 29].

Figure 1 shows a schematic diagram for temperature control in a 5G base station [30], much waste heat is proposed by the electrical components, and can be used by thermal energy harvesting devices. To achieve high thermal efficiency, the nanoscale boundary layer shown in fig. 1 is a nano/micro film embedded with metal nanoparticles, which can greatly enhance the heat transfer from the electrical component to its surroundings.

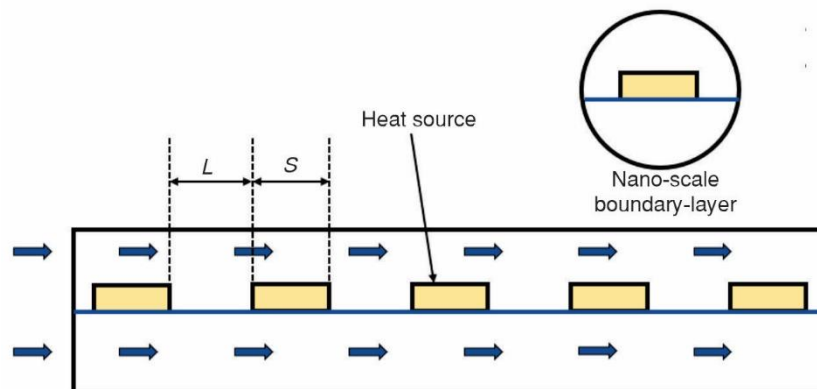


Figure 1. Micro-channel flow with multiple electronic components as heat sources; the nano-scale boundary-layer can be a fractal metasurface containing metal nanoparticles with good thermal conductivity

Nature-inspired nanomaterials

Some natural fibers, such as wool fibers [31] and polar animal hairs [32], have unique thermal properties, and nature-inspired nanomaterials with hierarchical structure are also promising, which are called as fractal metamaterials or meta-fractal [33, 34], fractal metasurface [35], and the fractal dimensions are the main key for applications [36-38]. A thin film with hierarchical metamaterial structure can be used to improve waste heat transfer and also for thermal energy harvesting.

Fractal thermodynamics

The 1-D heat equation for fig. 1 can be written as:

$$\frac{\partial T}{\partial t} = \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x} \right) + Q(x) \quad (1)$$

where T is the temperature, k – the thermal conductivity coefficient, Q – the heat source. Equation (1) is simple, but it cannot model the effect of the electric components' size and distribution on the heat transfer, and a 3-D model has to be considered:

$$\frac{\partial T}{\partial t} = \frac{\partial}{\partial x} \left(k_x \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left(k_y \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left(k_z \frac{\partial T}{\partial z} \right) + Q(x, y, z) \quad (2)$$

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial x} \quad (3)$$

$$\frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial y} \quad (4)$$

$$\frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial y} + w \frac{\partial w}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial z} \quad (5)$$

where k_x , k_y , and k_z are, respectively, thermal conductivity coefficients in x -, y -, and z -directions, u , v , and w – the air velocity components in x -, y -, and z -directions, p – the pressure, and ρ – the density.

The system is complex, furthermore, the zig-zag boundary makes the numerical simulation even more complex. To solve the problems, the fractal thermodynamical model [39] is simple and reliable.

Consider the fluid problem in a fractal space, and we have establish a 1-D fractal-fractional model:

$$\frac{\partial^\alpha T}{\partial t^\alpha} = \frac{\partial^\alpha}{\partial x^\alpha} \left(k \frac{\partial^\alpha T}{\partial x^\alpha} \right) + Q(x) \quad (6)$$

where the two-scale fractal derivative is defined as [39]:

$$\frac{\partial^\alpha T}{\partial x^\alpha}(x_0) = \Gamma(1 + \alpha) \lim_{x \rightarrow x_0} \frac{T(x, t) - T(x_0, t)}{(x - x_0)^\alpha} \quad (7)$$

$$\frac{\partial^\alpha T}{\partial t^\alpha}(t_0) = \Gamma(1 + \alpha) \lim_{t \rightarrow t_0} \frac{T(x, t) - T(x, t_0)}{(t - t_0)^\alpha} \quad (8)$$

where L is the distance between two adjacent electric components, and assume $L < S$, S – the width of the components as illustrated in fig. 1, Γ – the gamma function, and Δt – the time for the air moving through the adjacent distance, it can be calculated as:

$$\Delta t = t - t_0 = \frac{L}{u} \quad (9)$$

where u is the nanofluid's velocity. The fractional order can be calculated as:

$$\alpha = \frac{V - V_0}{V} \quad (10)$$

where V is the total volume of the inner tube and V_0 – the volume occupied by the electric components.

We give an explanation of the simplified eq. (6). According the definition of the fractal derivative, we have:

$$\frac{\partial^\alpha T}{\partial x^\alpha}(x_0) = \Gamma(1 + \alpha)(x - x_0)^{1-\alpha} \lim_{x \rightarrow x_0} \frac{T(x, t) - T(x_0, t)}{(x - x_0)} \approx \Gamma(1 + \alpha)L^{1-\alpha} \frac{\partial T}{\partial x} \quad (11)$$

$$\frac{\partial^\alpha T}{\partial t^\alpha}(t_0) = \Gamma(1 + \alpha)(t - t_0)^{1-\alpha} \lim_{t \rightarrow t_0} \frac{T(x, t) - T(x, t_0)}{(t - t_0)} \approx \Gamma(1 + \alpha)(\Delta t)^{1-\alpha} \frac{\partial T}{\partial t} \quad (12)$$

So eq. (6) can be written as:

$$\Gamma(1 + \alpha) \left(\frac{L}{u} \right)^{1-\alpha} \frac{\partial T}{\partial t} = \Gamma(1 + \alpha)L^{1-\alpha} \frac{\partial}{\partial x} \left[k\Gamma(1 + \alpha)L^{1-\alpha} \frac{\partial T}{\partial x} \right] + Q(x) \quad (13)$$

Finally, we obtain the following model:

$$\frac{\partial T}{\partial t} = \Gamma(1 + \alpha)(uL)^{1-\alpha} \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x} \right) + \frac{Q(x)}{\Gamma(1 + \alpha)} \quad (14)$$

It is obvious from eq. (14) that 1-D fractal-fractional model involves nanofluid's velocity, u , and electric components' distribution, L , and electric components' volume, α , so eq. (14) is much more reasonable than eq. (1). The nanofluid's velocity can be calculated by Bernoulli equation:

$$\frac{1}{2}u^2 + \frac{p}{\rho} = B \quad (15)$$

where B is the Bernoulli constant, p – the pressure, and ρ – the density.

The fractal thermodynamical model is much attractive for engineering applications, for examples, fractal Schrodinger equation [40], fractal Camassa-Holm and Degasperis-Procesi models [41], and fractal variational principles [42].

Conclusion

We can now look forward with optimism that fractal thermodynamics opens a whole new window for 5G communication technology and its higher generations (6G or 7G), nanofibers with metal nanoparticles prove to be a good medium for electronic components to dissipate the wasted heat to their surroundings. This issue invites professors from Zhongyuan University of Technology, Zhengzhou, China to address the prominent problem arising in 5G base

stations, and Yancheng Polytechnic College, China to address another hot topic on nanoscale fluid mechanics and nanomaterials.

Acknowledgement

This work is supported by Provincial Scientific Research Platform Open Project Funding of Yancheng Polytechnic College (YGKF202011) and Jiangsu Higher Vocational College Teachers' Professional Leaders' High and Training(Team Visit) Project(2022TDFX008).

References

- [1] Andrews, J. G., *et al.*, What Will 5G Be? *IEEE Journal om Selected Areas in Communications*, 32 (2014), 6, pp. 1065-1082
- [2] Mc Nair, J., 6G Frequency Switch that Spares Scientific Services, *Nature*, 606 (2022), June, pp. 34-35
- [3] Kanno, A., Seamless Convergence Between Terahertz Radios and Optical Fiber Communication Toward 7G Systems, *IEEE Journal of Selected Topics in Quantum Electronics*, 29 (2023), 5, 8600509
- [4] Qian, X., *et al.*, Thermodynamics of Ionic Thermoelectrics for Low-Grade Heat Harvesting, *ACS Energy Letters*, 9 (2024), 2, pp. 679-706
- [5] Ge, X., *et al.*, 5G Ultra-Dense Cellular Networks, *IEEE Wireless Comm.*, 23 (2016), 1, pp. 72-79
- [6] Liu, S. B ., *et al.*, Efforts Toward the Fabrication of Thermoelectric Cooling Module Based on N-Type and P-Type PbTe Ingots, *Advanced Functional Materials*, on-line first, <https://doi.org/10.1002/adfm.202315707>, 2024
- [7] Heidari, H., *et al.*, Energy Harvesting and Power Management for IoT Devices in the 5G Era, *IEEE Communications Magazine*, 59 (2021), 9, pp. 91-97
- [8] Hu, S. Y., *et al.*, Modeling and Analysis of Energy Harvesting and Smart Grid-Powered Wireless Communication Networks: A Contemporary Survey, *IEEE Transactions on Green Communications and Networking*, 4 (2020), 2, pp. 461-496
- [9] Lin, Y., *et al.*, Flexible, Highly Thermally Conductive and Electrically Insulating Phase Change Materials for Advanced Thermal Management of 5G Base Stations and Thermoelectric Generators, *Nano-Micro Letters*, 15 (2023), 1, Article Number 31
- [10] Xu, Z. P., Wang, K. J., An Analytical Thermal Model for the 3-D Integrated Circuit with New-Type Through Silicon Via, *Thermal Science*, 27 (2023), 3B, pp. 2391-2398
- [11] Tang, L., *et al.*, Flexible and Robust Functionalized Boron Nitride/Poly (p-Phenylene Benzobisoxazole) Nanocomposite Paper with High Thermal Conductivity and Outstanding Electrical Insulation, *Nano-Micro Letters*, 16 (2024), 1, Article Number 38
- [12] He, M.K., *et al.*, Shape Anisotropic Chain-Like CoNi/Polydimethylsiloxane Composite Films with Excellent Low-Frequency Microwave Absorption and High Thermal Conductivity, *Advanced Functional Materials*, on-line first, <https://doi.org/10.1002/adfm.202316691>, 2024
- [13] Han, Y. X., *et al.*, Highly Thermally Conductive Aramid Nanofiber Composite Films with Synchronous Visible/Infrared Camouflages and Information Encryption, *Angewandte Chemie-International Edition*, on-line first, <https://doi.org/10.1002/anie.202401538>FEB, 2024
- [14] Liu, G. L., *et al.*, Last Patents on Bubble Electrospinning, *Recent Patents on Nanotechnology*, 14 (2020), 1, pp. 5-9
- [15] Zuo, Y. T., Liu, H. J., Effect of Temperature on the Bubble-Electrospinning Process and Its Hints for 3-D Printing Technology, *Thermal Science*, 26 (2022), 3B, pp. 2499-2503
- [16] Wan, L. Y., Bubble Electrospinning and Bubble-spun Nanofibers, *Recent Patents on Nanotechnology*, 14 (2020), 1, pp. 10-13
- [17] Liu, H. Y., *et al.*, Interaction of Multiple Jets in Bubble Electrospinning, *Thermal Science*, 27 (2023), 3A, pp. 1741-1746
- [18] Ali, M., He, J.-H., Bipolymer Nanofibers: Engineering Nanoscale Interface via Bubble Electrospinning, *Journal of Applied Polymer Science*, 141 (2023), 5, e54878
- [19] Wang, Z. X., *et al.*, High-Quality Semiconductor Fibres via Mechanical Design, *Nature*, 626 (2024), Feb., pp. 72-78
- [20] Lv, Q. N., *et al.*, Three-Dimensional Printing to Fabricate Graphene-Modified Polyolefin Elastomer Flexible Composites with Tailorable Porous Structures for Electromagnetic Interference Shielding and Thermal Management Application, *Industrial & Eng. Chemistry Research*, 61 (2022), 45, pp. 16733-16746

- [21] Tavares, J., *et al.*, Flexible Textile Antennas for 5G Using Eco-Friendly Water-Based Solution and Scalable Printing Processes, *Advanced Materials Technologies*, on-line first, <https://doi.org/10.1002/admt.202301499>, 2024
- [22] Zhang, C., *et al.*, An Optically Semi-Transparent Liquid Antenna with Slot-Coupled Feeding for Future Wireless Communication Systems, *AEU-International Journal of Electronics and Communications*, 175 (2024), Jan., Article Number 155047
- [23] Khosravi, A., *et al.*, Waste Heat Recovery from a Data Centre and 5G Smart Poles for Low-Temperature District Heating Network, *Energy*, 218 (2021), 119468
- [24] Banotra, A., *et al.*, Energy Harvesting in Self-Sustainable Iot Devices and Applications Based on Cross-Layer Architecture Design: A Survey, *Computer Networks*, 236 (2023), 110011
- [25] Haeri, S. Z., *et al.*, Review on Stability, Thermophysical Properties, and Solar Harvesting Applications of Titanium Nitride-Based Nanofluids: Current Status and Outlook, *Energy & Fuels*, on-line first, <https://doi.org/10.1021/acs.energyfuels.3c03360>, 2024
- [26] Hyemin, K., *et al.*, Enhancing Solar Thermal Energy Harvesting Efficiency and Temperature Uniformity of Fe₃O₄ Nanofluid in Receiver of Direct Solar Thermal Collector Using Dynamic Magnetic Field, *Applied Thermal Engineering*, 236 (2024), Part C, 121744
- [27] He, J.-H., Abd-Elazem, N. Y., The Carbon Nanotube-Embedded Boundary Layer Theory for Energy Harvesting, *Facta Universitatis Series: Mechanical Engineering*, 20 (2022), 2, pp. 211-235
- [28] Kou, S. J., *et al.*, Fractal Boundary Layer and Its Basic Properties, *Fractals*, 30 (2022), 09, 2250172
- [29] Zhang, P. L., Wang, K. J., A New Fractional Thermal Model for the Cu/Low-k Interconnects in Nanometer Integrated Circuit, *Thermal Science*, 26 (2022), 3B, pp. 2413-2418
- [30] Khosravi, A., *et al.*, An Artificial Intelligence Based-Model for Heat Transfer Modeling of 5G Smart Poles, *Case Studies in Thermal Engineering*, 28 (2021), 101613
- [31] Fan, J., Shang, X. M., Fractal Heat Transfer in Wool Fiber Hierarchy, *Heat Transfer Research*, 44 (2013), 5, pp. 399-407
- [32] Liu, H., *et al.*, A One Dimensional Heat Transfer Model for Wolverine (Gulo-Gulo) Hair, *International Journal of Clothing Science and Technology*, 30 (2018), 4, pp. 548-558
- [33] Goyal, N., Panwar, R., Minkowski Inspired Circular Fractal Metamaterial Microwave Absorber for Multi-band Applications, *Applied Physics A*, 129 (2023), 4, 293
- [34] Sabban, A., Novel Meta-Fractal Wearable Sensors and Antennas for Medical, Communication, 5G, and IoT Applications, *Fractal and Fractional*, 8 (2024), 2, Article Number 100
- [35] Duan, Y. P., *et al.*, Layered Metamaterials with Sierpinski Triangular Fractal Metasurface: Compatible Stealth for S-Band Radar and Infrared, *Materials Today Physics*, 38 (2023), 101210
- [36] He, C. H., Liu, C., Fractal Dimensions of a Porous Concrete and Its Effect on the Concrete's Strength, *Facta Universitatis Series: Mechanical Engineering*, 21 (2023), 1, pp. 137-150
- [37] He, C. H., *et al.*, A Novel Bond Stress-Slip Model for 3-D Printed Concretes, *Discrete and Continuous dynamical Systems*, 15 (2021), 7, pp. 1669-1683
- [38] Liu, H., *et al.*, Influence of Pore Defects on the Hardened Properties of 3D Printed Concrete with Coarse Aggregate, *Additive Manufacturing*, 55 (2022) 102843
- [39] Zhao, L., *et al.*, Promises and Challenges of Fractal Thermodynamics, *Thermal Science*, 27 (2023), 3A, pp. 1735-1740
- [40] Sun, J. S., Fractal Modification of Schrodinger Equation and Its Fractal Variational Principle, *Thermal Science*, 27 (2023), 3A, pp. 2029-2037
- [41] Liu, F. L., *et al.*, A Fractal Solution of Camassa-Holm and Degasperis-Procesi Models Under Two-Scale Dimension Approach, *Fractals*, 31 (2023), 5, 2350053
- [42] Lu, J., Application of Variational Principle and Fractal Complex Transformation to (3+1)-Dimensional Fractal Potential-YTSF Equation, *Fractals*, 32 (2024), 1, 2450027